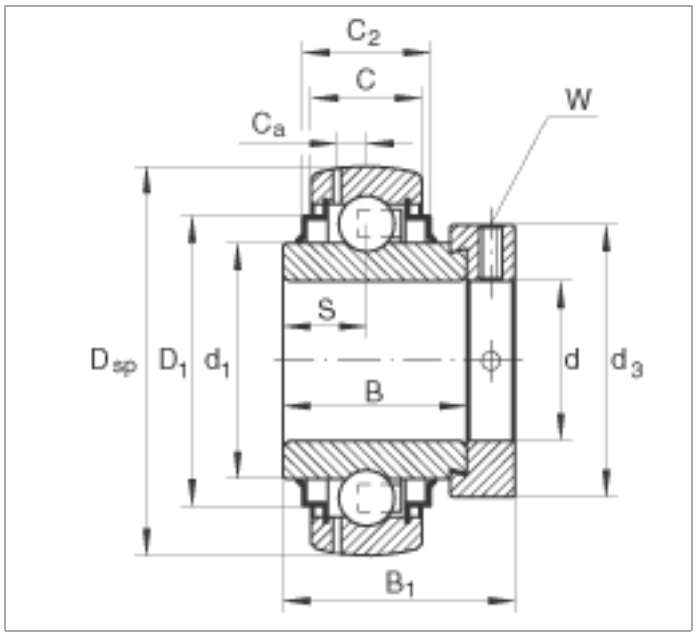
Radial insert ball bearings

GE35-XL-KRR-B (Series GE..-KRR-B)

spherical outer ring, location by eccentric locking collar, R seals on both sides

The datasheet is only an overview of dimensions and basic load ratings of the selected product. Please always observe all the guidelines in these overview pages. Further information is given on many products under the menu item "Description". You can also order comprehensive information via the Catalogue ordering system (http://www.ina.de/content.ina.de/en/mediathek/library/library.jsp) or by telephone on +49 (91 32) 82 - 28 97.

d	35	mm	
D_{SF}	72	mm	
B_1	51,3	mm	
B	37,7	mm	
C	19	mm	
C_2	22,5	mm	
C_a	5,6	mm	
D_1	60,3	mm	
d_1	46,8	mm	
$d_{3\,max}$	55	mm	
S	18,8	mm	
W	5	mm	
C_{ur}	770	N	Fatigue limit load, radial
m	0,59	kg	Mass
C_r	27500	N	Basic dynamic load rating, radial
C_{0r}	15300	N	Basic static load rating, radial
f_0	13,8		Calculation factor


C2
C
Ca
W
S
Dsp
D1
d1
B
d
d3
B1