NOTES:

1.0 ELECTRICAL SPECIFICATIONS:

1.1 FREQUENCY RANGE: DC TO 18.0 GHz

1.2 MAXIMUM INPUT POWER:
- 2 WATTS AT +25°C
- 1 WATT AT +125°C


1.3 MAXIMUM VSWR:
- DC to 4 GHz: 1.05:1
- 4 to 12 GHz: 1.10:1
- 12 to 18 GHz:1.14:1

1.4 IMPEDANCE: 50 OHMS

1.5 TEMPERATURE RANGE: −65°C TO +125°C

2.0 MARKING:

2.1 MARK UNIT AS SHOWN:
REF.: INK−02639−27−06

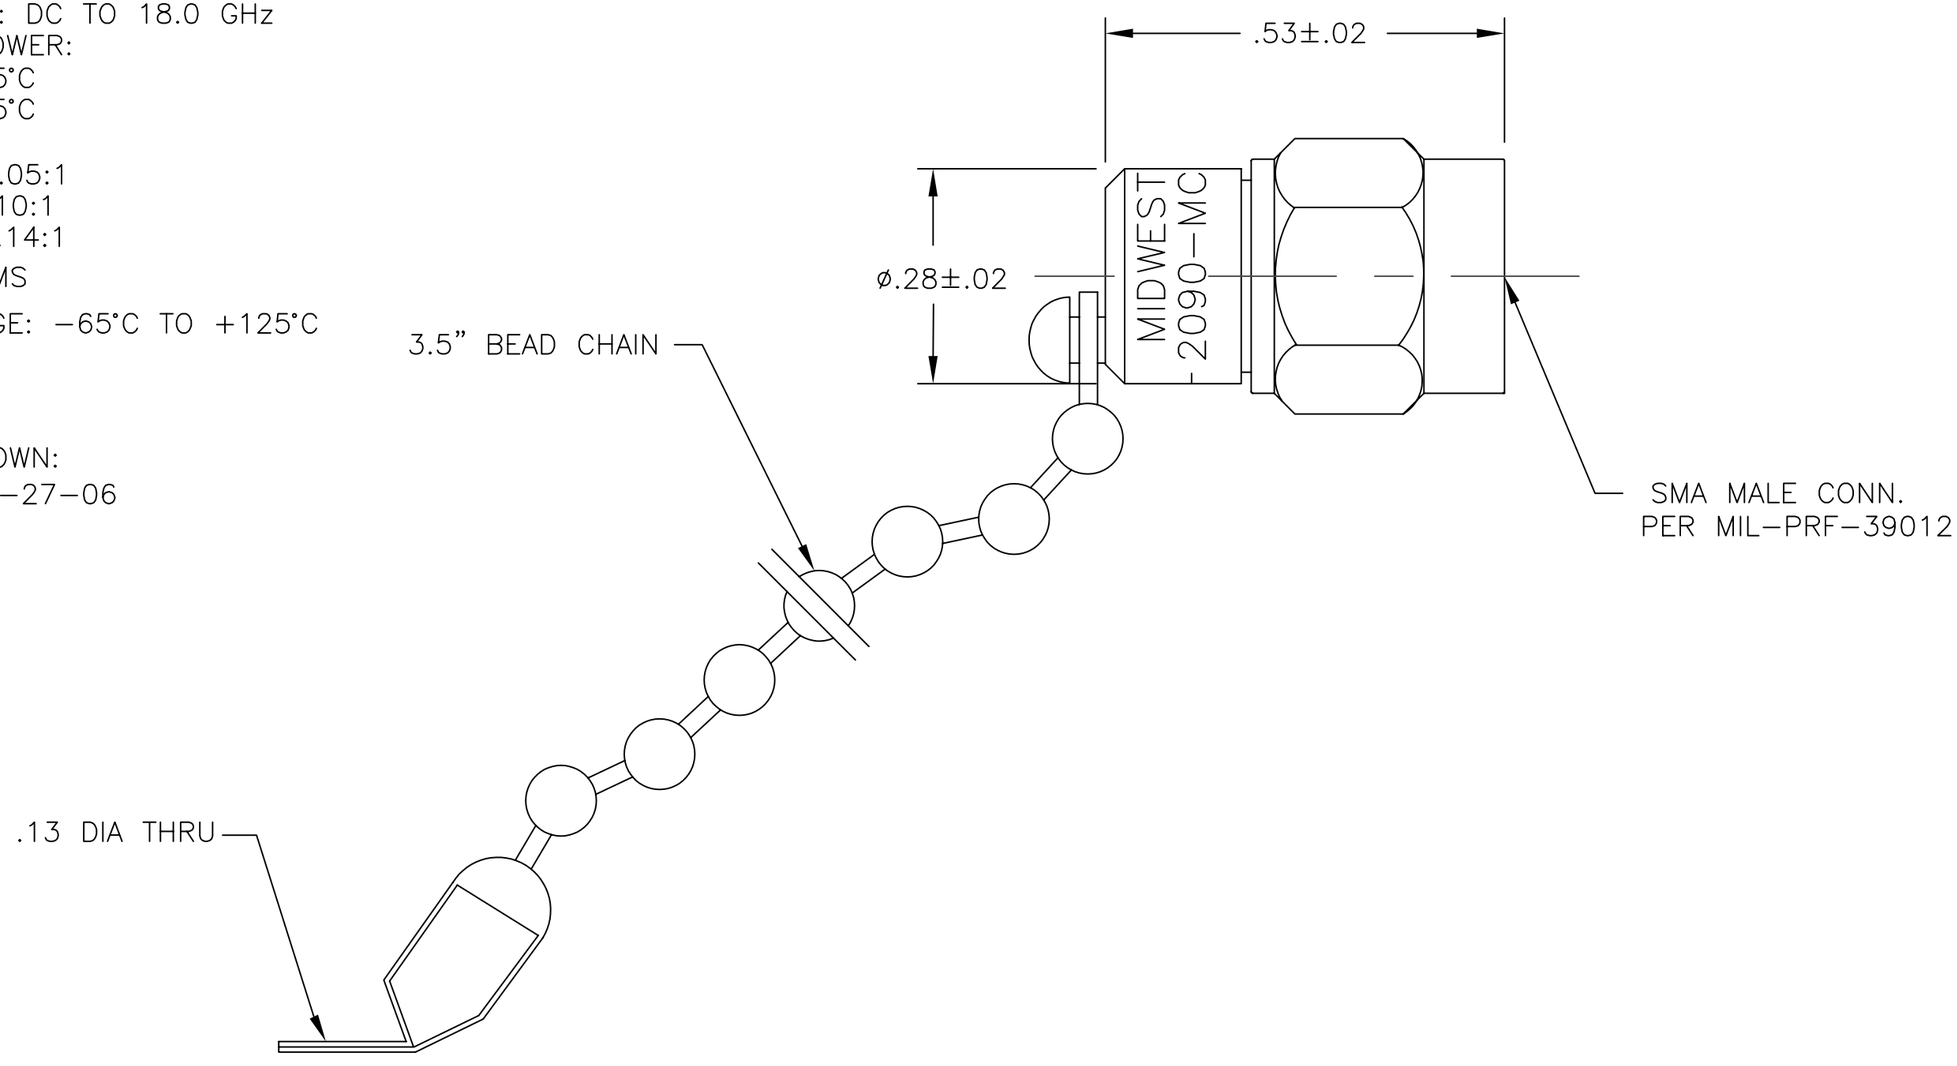

MODEL NUMBER
TRM−2090−MC−SMA−02

REV.	DESCRIPTION	DATE
–	RELEASED	7/26/85
A	ECR 3676	6/24/85
B	ECR 5855	2/20/88
C	ECR 6545	8/27/89
D	ECR 6940	11/14/89
E	ECR 7356	4/24/90
E1	REDRAW ON CAD	9/6/91
F	ECN 11825	5/18/92
F1	ADDED TITLEBLOCK	10/28/05
H	ECO 23197	1/13/11

NOTICE: The information contained in this drawing is proprietary and must not be used without the permission of Emerson Network Power.

UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE:
3 PLACE DECIMALS ±.005
2 PLACE DECIMALS ±.02
FRACTIONS ±1/64
PARALLELITY: T.I.R. _____
FLATNESS: T.I.R. _____
CONCENTRICITY: T.I.R. _____
ANGLES AND PERPENDICULARITY: ±1°

CAGE CODE 34078

MIDWEST MICROWAVE

EMERSON Network Power
Connectivity Solutions

TITLE
2 WATT TERMINATION
OUTLINE DRAWING

DRAWN/DATE	ENG./DATE	DRAWING NUMBER	REV.
A.BEATTY 9/6/91	G.KOZAK 9/23/91	TRM−2090−MC−SMA−02−01	H
CHECKED/DATE C.RICKARD 9/10/91	APPROVED/DATE	SCALE: 5=1	SHEET 1 of 1

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Cinch:

21-14-M5.0 415-0536-012 142-0403-011 415-0043-MM250 145-0701-821 CN0967C10A20P6-040 DD2466134 DEUH-9P 147-0701-832 30-9506-88 30-9516 CN1021A14G03P8-040 131-3701-306 145-0693-002 147-0701-241 415-0030-MM150 M49142/03-0005 108-0913-001 40-9715HM 415-0203-024 C0909A18-11PN-106 CJ70-7 135-3402-001 40-98443N-C 8-141 111-0102-001 12-141 415-0028-048 ATT-0263-04-SMA-02 M24308/4-5F