





ROHS

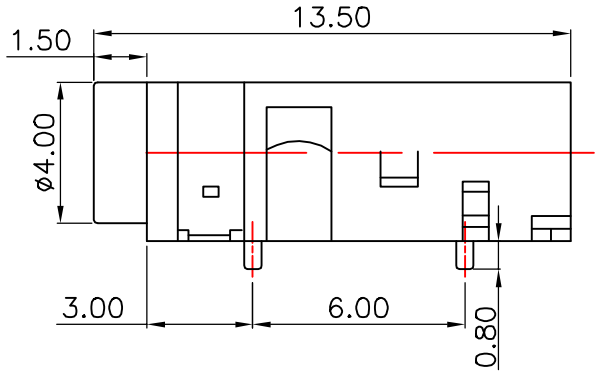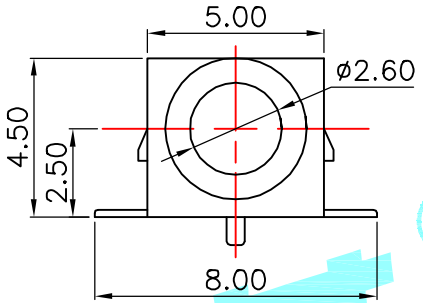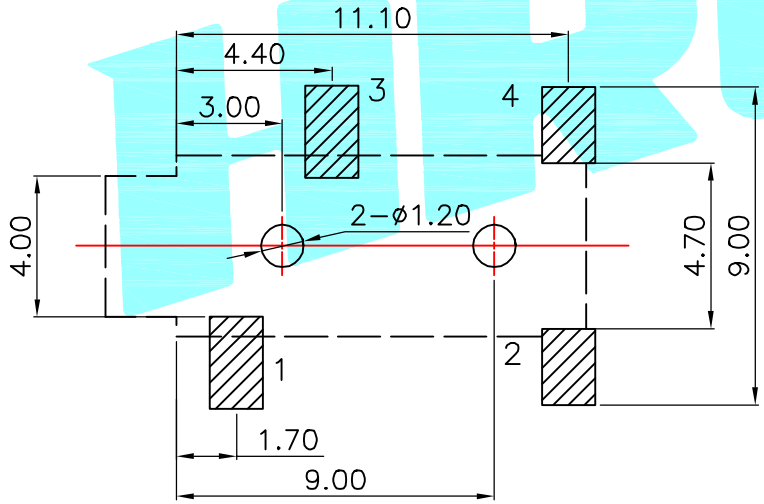



P.C.B LAYOUT(copper-side view)



Model No.	PJ-202A-A	PJ-202A-B	PJ-202A-C
Schematic			

Rating:0.5A 30V DC
Contact Resistance:100 mΩ Max.
Operating temperature:-20℃~70℃
Operating force:3-20N
Operating Life:5,000cycles

ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
②	Terminal	———	4	Phosphor bronze	Au Plating	———
①	Housing	———	1	Nylon	Black	———

APPROVALS		DATE	
DRAWN	J.X.Zhang	2013/11/11	HRO韩荣® ELECTRONICS CO.,LTD
CHECKED			TITLE: PHONE JACKES
APPROVALS			PART NO. PJ-202A

TOLERANCES ARE				UNIT: mm	SCALE: 1:1	PROJ:
	30~以下	±0.30	ANGLE			
	10~30	±0.20				
	5~10	±0.15	±2°	DRAWING NO.	———	SHEET 1 OF 1
	~ 5	±0.10				

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
———	A	———	NEW	———	———	———

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

HRO:

K5-1617SA-01 U-M-M5DD-W-2 K2-1102SP-K4SC-04 ES-07KP K2-1102DP-G4SW-04 PJ-3250-5A
U-F-M5DD-Y-L U-F-M5DS-Y-1 DA-10RP DS-01BP K2-1101DF-A4DW-01 K2-1102BG-I4CW-01
TYPE-C-31-M-04 U-F-M5SS-W-5 DC-031A-10A K2-1818DP-A3SW-01 K3-2258S-E1 SIM-08A
U-F-M5DD-W-L K2-1102DP-S3SW-04 K2-1102SP-A5SC-04 K3-1346S-F1 DQ-03BP K2-1102AT-A4CW-01
PJ-399B-6A U-C-M5DW-W-1 K8-5851D-L1 SS-22D03-G4 U-C-M5SS-Y-1 U-F-M5DD-Y-L1