


Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

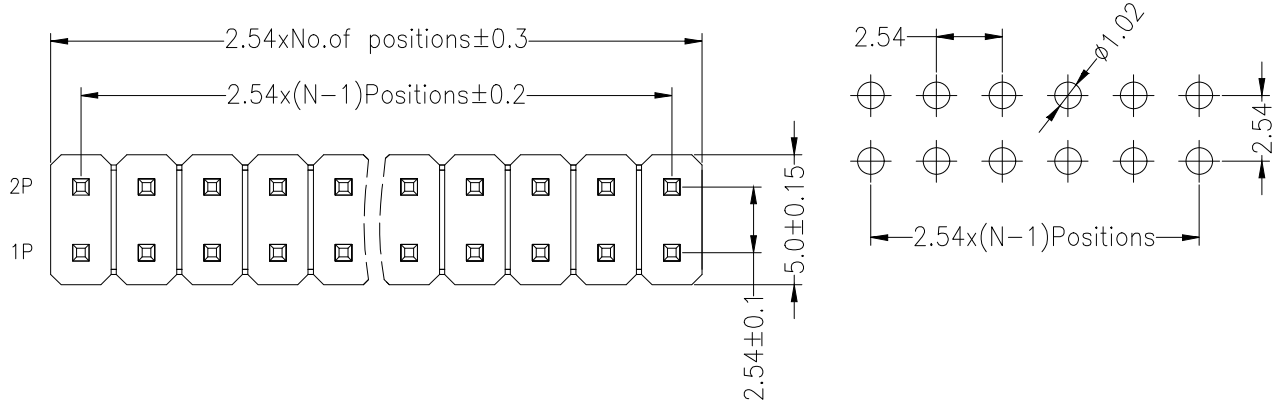

SPECIFICATIONS
Rated Current:3.0AMP
Contact Resistance:20mΩ Max
Withstand Voltage:1000V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:-40°c to +105°c

Contact Material:Brass
Contact Plating:Au Over Ni
Insulator Material:Polyester(UL94V-0)
Standard: PA6T
Max.Processing Temp: 230°C for 30-60 seconds
(260°C for 10 seconds)

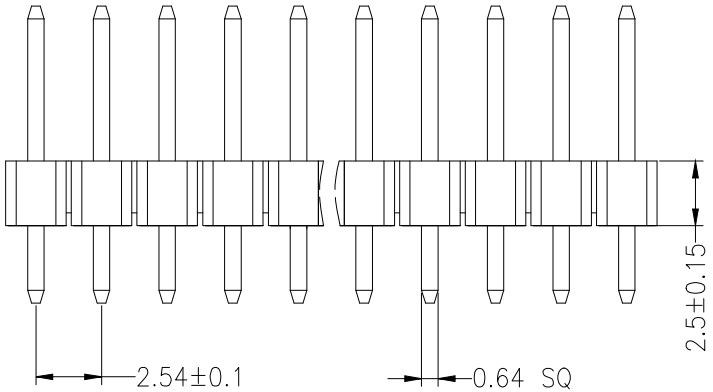



Dimension antitheses list			
ITEM	PA	PC	L
Standard	8.30	3.00	13.80
Alternate			

Ordering Information

PZ 254 - * - N - Z - L* - **

- No.of Rows: 1=Single Row, 2=Dual Row
- No.of Pins: 2-40Pin
- Type: Z-直针, W-弯针, S-立贴, WS-侧贴
- Length (产品总高)
- Contact Plating: G0:Gold Flash, G1:1u" Gold, G2:3u" Gold, G3:5u" Gold, G4:10u" Gold, G5:15u" Gold, G6:30u" Gold, S0:Gold Flash/Tin, S1:Tin

序号 No.	变更内容 MODIFY CONTENT	日期 MODIFY DATE
1	初版发行	

GENERL TOLERANCE

DIM	TOL
X.X	±0.30
X.XX	±0.20
X.XXX	±0.10
Angle	±3.0°

制图 DRAWING	
审核 CHECK	
批准 APPROVAL	
比例 SCALE	
投影 Projection	

深圳市华灿天禄电子有限公司
ShenzhenhuacantianluELECTRONICS CO.,LTD

产品名称 TITLE	2.54双排 直排针(塑高2.5)	版本 REV.	A
产品料号 PART NO.	PZ254-2-06-Z-L13.8	单位 UNITS	mm
材料 MATERIAL		页次 SHEET	1/1

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

HCTL:

HC-PH-T PH-6A HC-PA-4A HC-PHD-2*2AW PM254-2-02-Z-8.5 PZ200-2-06-S PZ254-2-16-Z-8.5 HC-MX3.0-4AW HC-SPH-2*10A PM254-1-12-W-8.5 PZ200-2-06-W HC-PA-3AWD HC-PH-2AWT PH-2AW HC-RJ45-5JA-2-2 PZ254-2-03-W-8.5 HC-5264-3A HC-CZ254-3-16-Z-11.5-G0-F PH-4A TC-0513D-4.5-260G HC-5264-3AW HC-ST-003-03-Z PZ200-1-06-W PZ200-1-09-Z PZ200-2-17-Z-C PZ254-2-19-Z-8.5 XH-12A HC-PH-6AW-M HC621601A-M890-A HC-AA0B010-093