

PART NUMBER	ITEM ① BODY	ITEM ② CONTACT	ITEM ③ INSULATOR	ITEM ④ HEX NUT	ITEM ⑤ CRIMP SLEEVE	ITEM ⑥ RETENTION SPRING	ITEM ⑦ END CAP
142-4404-101	BRASS GOLD PL .00001 MIN OVER NICKEL PL .0005 MIN OVER COPPER PL .00005 MIN	BERYLLIUM COPPER GOLD PL .00005 MIN OVER NICKEL PL .0005 MIN OVER COPPER PL .00005 MIN	TEFLON	BRASS GOLD PL .0001 MIN OVER NICKEL PL .00005 MIN OVER COPPER PL .00005 MIN	COPPER GOLD PL .0001 MIN OVER NICKEL PL .00005 MIN OVER COPPER PL .00005 MIN	BERYLLIUM COPPER UNPLATED	BRASS GOLD PL .00001 MIN OVER NICKEL PL .00005 MIN OVER COPPER PL .0005 MIN
142-4404-106	BRASS NICKEL PL .001 MIN OVER COPPER PL .00005 MIN	BERYLLIUM COPPER GOLD PL .00005 MIN OVER NICKEL PL .0005 MIN OVER COPPER PL .00005 MIN	TEFLON	BRASS NICKEL PL .0001 MIN OVER COPPER PL .00005 MIN	COPPER NICKEL PL .0001 MIN OVER COPPER PL .00005 MIN	BERYLLIUM COPPER UNPLATED	BRASS NICKEL PL .0001 MIN OVER COPPER PL .0005 MIN

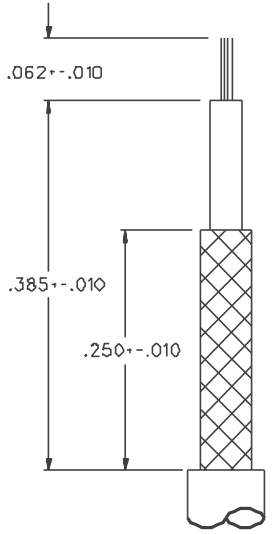

CABLE STRIP DIMENSIONS

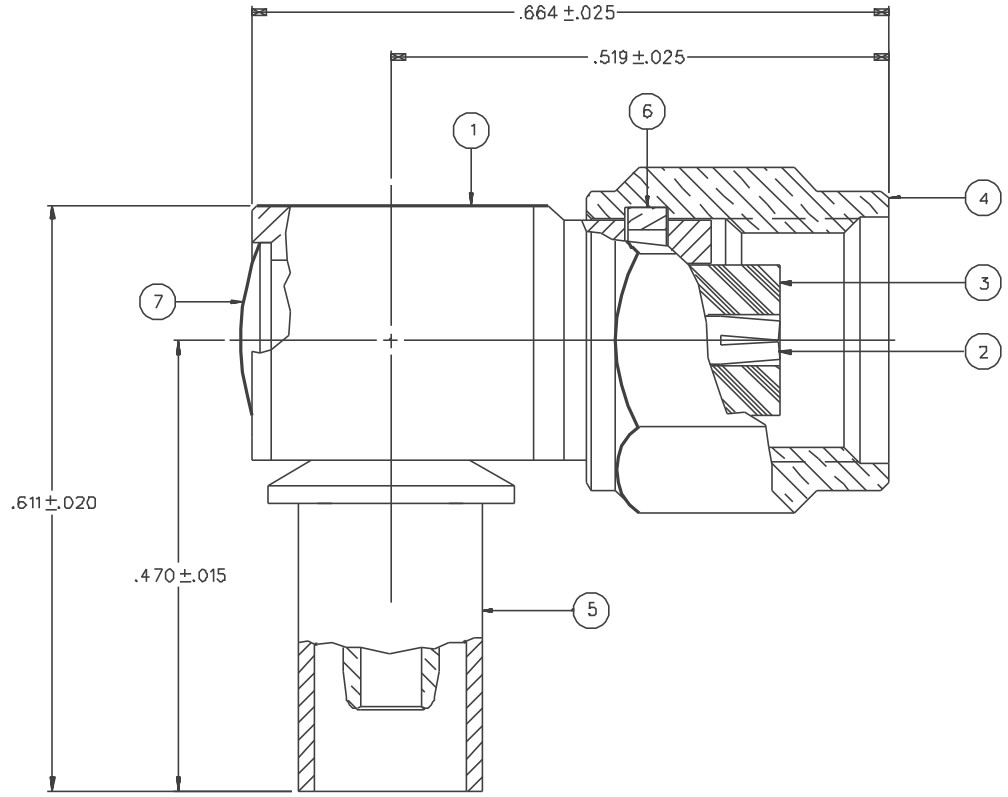

NOTES:

1. SPECIFICATIONS:

IMPEDANCE: 50 OHMS
FREQUENCY RANGE: 0-12.4 GHZ
VSWR: 1.17+.06F MAX (F IN GHZ)
WORKING VOLTAGE: 250 VRMS MAX AT SEA LEVEL
DIELECTRIC WITHSTANDING VOLTAGE: 750 VRMS MIN AT SEA LEVEL
INSULATION RESISTANCE: 5000 MEGOHM MIN
CONTACT RESISTANCE:
CENTER CONTACT - INITIAL 4.0 MILLIOHM MAX, AFTER ENVIRONMENTAL 6.0 MILLIOHM MAX
OUTER CONDUCTOR - INITIAL 2.0 MILLIOHM MAX AFTER ENVIRONMENTAL NOT APPLICABLE
BODY TO CABLE - 0.5 MILLIOHM MAX (GOLD PLATED), 5.0 MILLIOHM MAX (NICKEL PLATED)
CORONA LEVEL: 190 VOLTS MIN AT 70,000 FEET
INSERTION LOSS: .15√F (F IN GHZ) AT 6 GHZ
RF LEAKAGE: -60 DB MIN AT 2.5 GHZ
RF HIGH POTENTIAL WITHSTANDING VOLTAGE: 500 VRMS MIN AT 4 AND 7 MHZ

MECHANICAL:

ENGAGE/DISENGAGE TORQUE: 2 INCH-POUNDS MAX
MATING TORQUE: 7-10 INCH POUNDS
COUPLING PROOF TORQUE: 15 INCH-POUNDS MIN
COUPLING NUT RETENTION: 60 LBS MIN
CONTACT RETENTION: 6 LBS MIN
CABLE ACCEPTABILITY: RG 316 DOUBLE SHIELDED
RG 188/U DOUBLE SHIELDED
CABLE HEX CRIMP SIZE: .151
CABLE RETENTION: 20 LBS MIN AXIAL FORCE
DURABILITY: 500 CYCLES MIN

ENVIRONMENTAL:

(MEETS OR EXCEEDS THE APPLICABLE PARAGRAPH OF MIL-C-39012)
THERMAL SHOCK: MIL-STD-202, METHOD 107, CONDITION B, EXCEPT +85 DEG C HIGH TEMP
OPERATING TEMPERATURE: -65 DEG C TO 165 DEG C
CORROSION: MIL-STD-202, METHOD 101, CONDITION B
SHOCK: MIL-STD-202, METHOD 213, CONDITION I
VIBRATION: MIL-STD-202, METHOD 204, CONDITION D
MOISTURE RESISTANCE: MIL-STD-202, METHOD 106

DRAWING NO.
C - 142-4404-101/110

0	REVISIONS				
ENGINEERING RELEASE					
1	10-27-98	R H	S I R		ECN 45979

CUSTOMER DRAWING

THIS DRAWING TO BE INTERPRETED PER ANSI Y 14.5M - 1982

"μSTATION"

COMPANY CONFIDENTIAL

TOLERANCE UNLESS OTHERWISE SPECIFIED		DRAWN BY	DATE
DECIMALS	mm	SWC	7-20-98
.XX		CHECKED BY	DATE
.XXX REF		SWC	11-6-98
MATL		APPROVED BY	DATE
		T.AK	11-6-98
FINISH		APPROVED BY	DATE
		RJB	11-9-98
		RELEASE DATE	

JOHNSON a cinch connectivity solutions brand

Cinch Connectivity Solutions
299 Johnson Ave. Ste. 100
Waseca, MN 56093
1-800-247-8256

TITLE
PLUG ASSEMBLY
RA CABLED REVERSE
POLARITY SMA, RG 316 DS

CODE NO.	DRAWING NO.
	C - 142-4404-101/110

SCALE 10:1	U/M INCH	SHEET 2 OF 2

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Cinch:

135-3402-001 21-14-M5.0 415-0030-MM150 12-141 147-0701-832 40-98443N-C DEUH-9P 111-0102-001 142-0403-011 145-0693-002 415-0028-048 ATT-0263-04-SMA-02 M24308/4-5F 131-3701-306 30-9506-88 415-0536-012 8-141 147-0701-241 415-0043-MM250 415-0203-024 DD2466134 C0909A18-11PN-106 CJ70-7 CN0967C10A20P6-040 40-9715HM 108-0913-001 145-0701-821 30-9516 CN1021A14G03P8-040 M49142/03-0005