
TE Connectivity: Every Connection Counts
© 2017 TE Connectivity Ltd. family of companies. All Rights Reserved

HARNESSING

HEAT SHRINK BOOTS

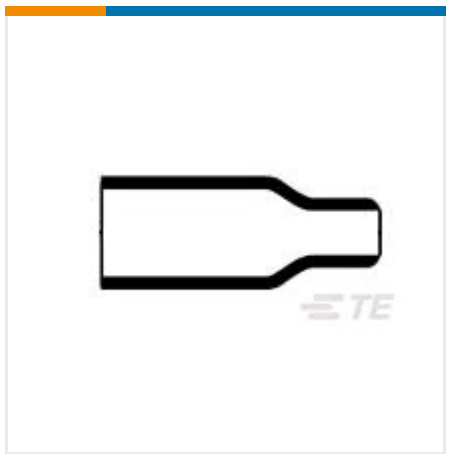

✔ Active

TE CONNECTIVITY (TE)

202A111-100/180-0

Raychem | CAP , CRPS

202A111-100/180-0
TE Internal Number: 778635-000
Alias ID: 3-1196060-7

EU RoHS Compliant
EU ELV Compliant

Lipped No

Operating Temperature Range (°C) -30 – 80

Fluid/Chemical Resistance Suitable for occasional exposure to fluids

Adhesive Options /180 Precoat, -80 – 80°C (-112 – 176°F)

Material Systems Code 100

PRODUCT DRAWING
English

DOCUMENTATION

Product Drawings

Boot, Straight, Overexpanded
PDF
English

Product Specifications

Product Specification

Thermofit Zero Hal Polyolefin Molded Components Halogen-Free, Flame Retarded, Semi-Flexible, Heat-Shrinkable
PDF
English

Product Environmental Compliance

Safety Data Sheet

Downloaded from Arrow.com.

Flame-Retardant Zero-Halogen Heat-Shrinkable Polymeric Products

PDF

English

Flame-Retardant Zero-Halogen Heat-Shrinkable Polymeric Products

PDF

Danish

Flame-Retardant Zero-Halogen Heat-Shrinkable Polymeric Products

PDF

Dutch

Flame-Retardant Zero-Halogen Heat-Shrinkable Polymeric Products

PDF

English

Flame-Retardant Zero-Halogen Heat-Shrinkable Polymeric Products

PDF

French

Flame-Retardant Zero-Halogen Heat-Shrinkable Polymeric Products

PDF

German

Flame-Retardant Zero-Halogen Heat-Shrinkable Polymeric Products

PDF

Italian

Flame-Retardant Zero-Halogen Heat-Shrinkable Polymeric Products

PDF

Norwegian

Flame-Retardant Zero-Halogen Heat-Shrinkable Polymeric Products

PDF

Spanish

Flame-Retardant Zero-Halogen Heat-Shrinkable Polymeric Products

PDF

Swedish

Flame-Retardant Zero-Halogen Heat-Shrinkable Polymeric Products

PDF

English

Ethylene Terpolymer Based Hot-Melt Adhesives

PDF

German

Ethylene Terpolymer Based Hot-Melt Adhesives

PDF

Italian

Ethylene Terpolymer Based Hot-Melt Adhesives

PDF

Spanish

Ethylene Terpolymer Based Hot-Melt Adhesives

PDF

Dutch

Ethylene Terpolymer Based Hot-Melt Adhesives

Downloaded from Arrow.com.

PDF

English

Ethylene Terpolymer Based Hot-Melt Adhesives

PDF

French

Ethylene Terpolymer Based Hot-Melt Adhesives

PDF

Swedish

Ethylene Terpolymer Based Hot-Melt Adhesives

PDF

English

FEATURES

Please review product documents or contact us for the latest agency approval information.

Please Note: Use the Product Drawing for all design activity.

Product Type Features

Molded Part Type Micro Boot, Molded Boot

Configuration Features

Lipped No

Body Features

Material Systems Code 100
Adhesive Pre-Coat Yes

Dimensions

Cable Diameter Range 3.8 – 11.9 mm [.1496 – .469 in]
Wire/Cable Outside Diameter .177 in, .18 in, .2 in, .236 in, 5 mm, 6 mm

Usage Conditions

Operating Temperature Range (°C) -30 – 80
Flammability Low Fire Hazard

Operation/Application

Power Cable Accessory No

Industry Standards

Government Qualified No
Approved Standards BR1326 listed Class G, BS-G-198-5-DF, DEF Std 59-97 Issue 3 Type DF, IEC 62329-3-101

Other

Downloaded from Arrow.com.

Fluid/Chemical Resistance Suitable for occasional exposure to fluids
Adhesive Options /180 Precoat, -80 – 80°C (-112 – 176°F)
Adhesive Type Good Water Blocking Pre-Coat Adhesive

PRODUCT COMPLIANCE

Statement of Compliance

Statement of Compliance
PDF

Downloaded from Arrow.com.

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

TE Connectivity:

1903112-2 282680-1 292206-2 HSHC4508K2J U5254-000005-030PA 2-520263-2 2005330-1 1-962915-1 2310537-1 2380312-2 354022KFT ROX05SJ18R 175977-2 1897725-2 2-521104-2 2098557-4 CPF0402B37K4E1 SBCHE154R7K T4133012081-000 1393454-9 3631B101LL 917688-1 MPT100C18RF SMV1W220KJT 3-1447221-5 HT-CT-50M-1-OUT-0 RH73H2A40MKTN TE50BR39J 170376-2 SBCHE64R7K