MATERIAL AND FINISH:
Insulator: Polycarbonate, UL-94V-0 rated
Contacts: Brass

ELECTRICAL SPECIFICATIONS:
Current rating: 10 A/15 A
Voltage rating: 250 VAC
Insulation resistance: 100 Mohm min. at 500 VDC
Dielectric withstanding voltage: 2000 VAC for one minute

ORDERING CODE:
43R03-3 __ __ __ - __ __ __
1 2 3 4

1) COLOR
1 = BLACK
2 = GRAY

2) TERMINAL OPTIONS
1 = .187(4.8) WITH Ø1.4
2 = .250(6.3) WITH Ø1.65

3) ELECTRICAL CIRCUIT CONFIGURATION

1 = 10A 250V 70°C


15A 250V 70°C
2+GROUND




2 = 10A 250V 120°C
15A 250V 120°C
2+GROUND





4) PANEL THICKNESS

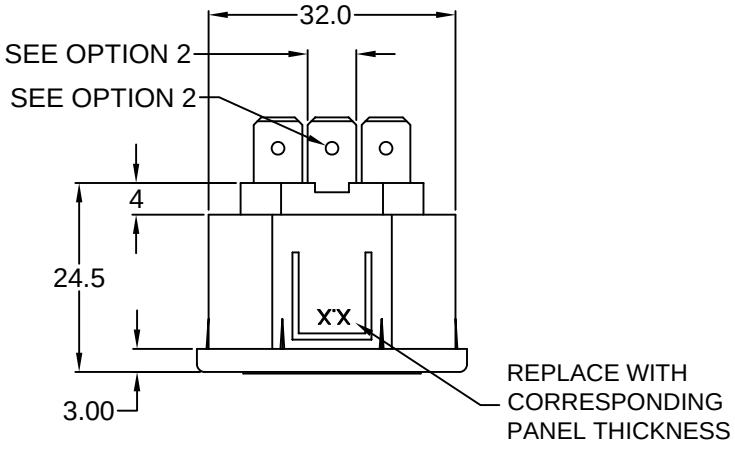

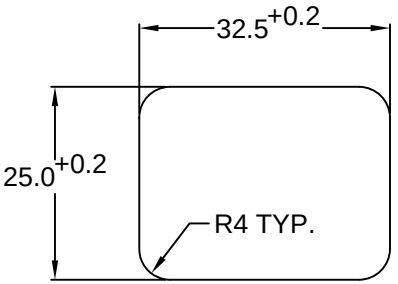

RECOMMENDED PANEL CUTOUT

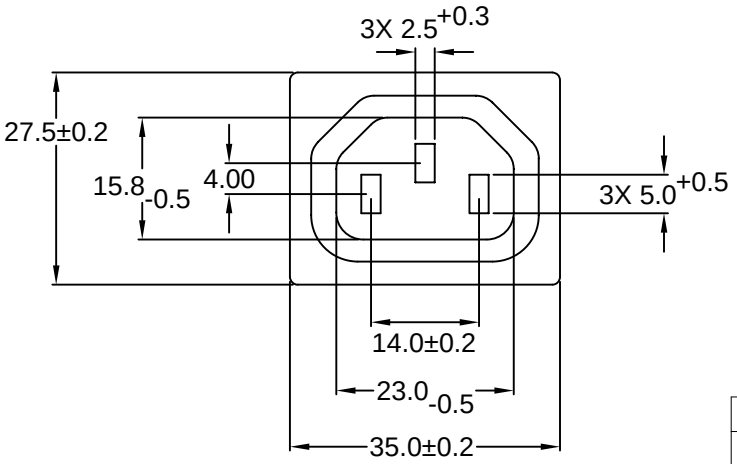

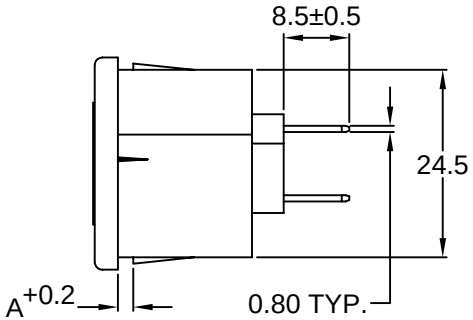

P/N	A	MAX. PANEL THICKNESS
43R03-3XXX-150	1.5	1.5
43R03-3XXX-200	2.0	2.0
43R03-3XXX-250	2.5	2.5

ADDITIONAL PANEL THICKNESS AVAILABLE ON REQUEST

REVISIONS

REV	DATE	CHANGE	CHNG	CHCK	APPR
A	10/8/04	ORDERING CODE #	PB		

TOLERANCE
UNLESS OTHERWISE SPECIFIED
X ± 1
X.X ± 0.4
X.XX ± 0.20

RoHS COMPLIANT

DRAWN BY	GQ	DATE: 10/05/01
CHECK BY	TD	DATE: 10/09/01
APPR BY	PB	DATE: 10/09/01

Power Dynamics, Inc.
Phone: 973 560-0019 Whippany, New Jersey Fax: 973 560-0076

PART: 10A/15A IEC 60320 APPL. OUTLET; QC TERMINALS; SNAP-IN, PANEL MOUNT

PART #: 43R03-3XXX-XXX

SHEET 1 of 1

SIZE: A

SCALE: NTS

ALL DIMENSIONS FOR REFERENCE ONLY
DIMENSIONS ARE IN MILLIMETERS

REV: A

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Power Dynamics:

43R03-3121-150