

FEMALE RIGHT ANGLE RECEPTACLE FOR PCB


SMT TYPE

R113.664.000

Series : **MCX**

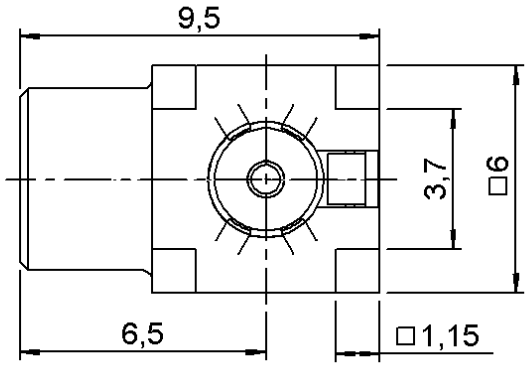



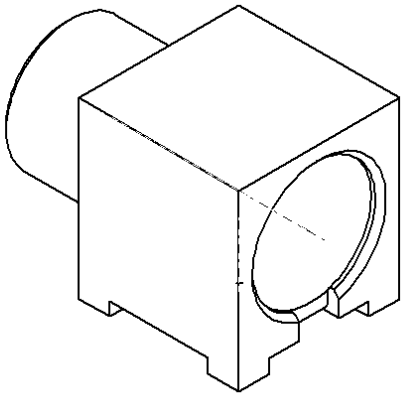

All dimensions are in mm.

COMPONENTS	MATERIALS	PLATINGS (µm)
BODY	**BRASS**	**GOLD 0.2 OVER NICKEL 2**
CENTER CONTACT	**BERYLLIUM COPPER**	**GOLD 0.5 OVER NICKEL 2**
OUTER CONTACT	-	-
INSULATOR	**PTFE**	
GASKET	-	
OTHERS PARTS	-	-
-	-	-
-	-	-

Issue : 0905 B

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

RADIALL®

Downloaded from Arrow.com.

FEMALE RIGHT ANGLE RECEPTACLE FOR PCB

SMT TYPE

R113.664.000

Series : **MCX**

PACKAGING

Standard	Unit	Other
100	**'W' option**	**Contact us**

SPECIFICATION

ELECTRICAL CHARACTERISTICS

Impedance		**50**	Ω
Frequency		**0-6**	GHz
VSWR	**1.25** +	**0,0000**	x F(GHz) Maxi
Insertion loss		**0.03**	√F(GHz) dB Maxi
RF leakage	- (	**NA**	- F(GHz)) dB Maxi
Voltage rating		**335**	Veff Maxi
Dielectric withstanding voltage		**1000**	Veff mini
Insulation resistance		**1000**	MΩ mini

ENVIRONMENTAL

Operating temperature	**-55/+155**	° C
Hermetic seal	**NA**	Atm.cm3/s
Panel leakage	**NA**	

OTHERS CHARACTERISTICS

Assembly instruction **NA**

Others :
-

MECHANICAL CHARACTERISTICS

Center contact retention		
Axial force – Mating end	**10**	N mini
Axial force – Opposite end	**10**	N mini
Torque	**NA**	N.cm mini
Recommended torque		
Mating	**NA**	N.cm
Panel nut	**NA**	N.cm
Mating life	**500**	Cycles mini
Weight	**1,6850**	g

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

RADIALL®

Downloaded from Arrow.com.

FEMALE RIGHT ANGLE RECEPTACLE FOR PCB


SMT TYPE

R113.664.000


Series : **MCX**

MCX SERIES - INFORMATION


Coplanar line : pattern and signal are on the same side . Thickness of PCB :.063(1.6mm)
The material of PCB is the epoxy resin of glass fabrics bacs . (Er = 4.8) . The solder resist should be printed exept for the land pattern on the PCB .

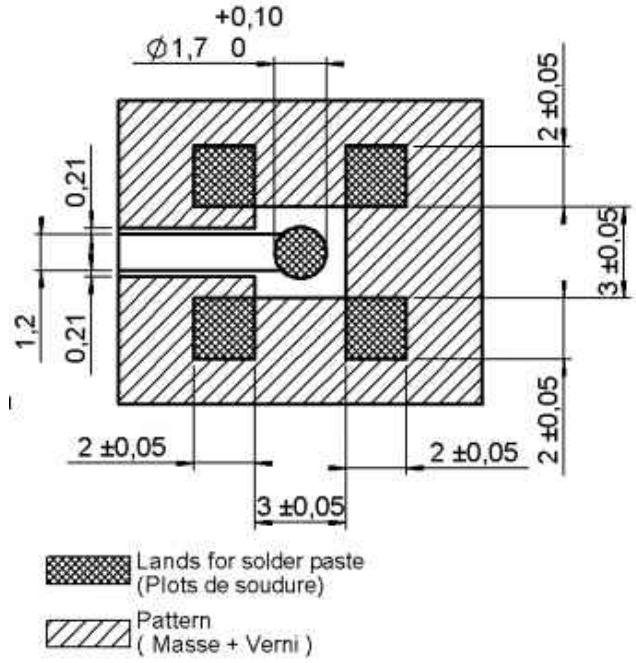

SHADOW OF MCX RECEPTACLE FOR VIDEO CAMERA

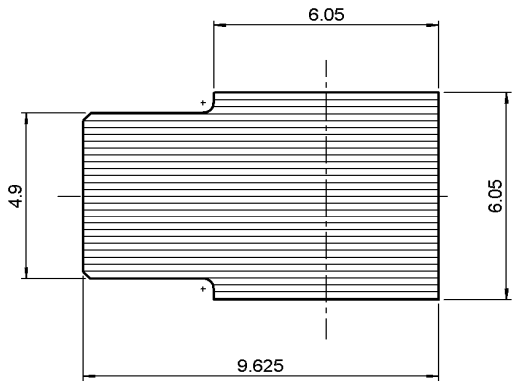

ASPIRATION AREA

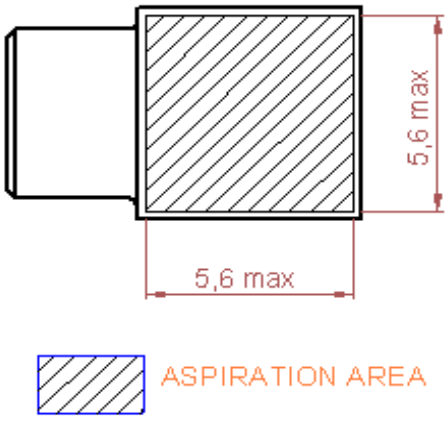

Issue : 0905 B

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

RADIALL ®

Downloaded from Arrow.com.

FEMALE RIGHT ANGLE RECEPTACLE FOR PCB

SMT TYPE

R113.664.000

Series : **MCX**

SOLDER PROCEDURE

1. Deposit solder paste ‘Sn Ag4 Cu0.5” on mounting zone by screen printing application. We recommend a low residue flux.
   We advise a thickness of 150 micromm (5.850 microinch). Verify that the edges of the zone are clean.


2. Placement of the receptacle on the mounting zone with an automatic machine of ‘pick and place’ type. Video camera is prefered to check the positioning of the compnent. Adhesive agents are forbidden on the receptacle.

3. Soldering by infra-red reflow.

4. Cleaning of printed circuit boards.

5. Checking of solder joints and position of the component by visual inspection.

TEMPERATURE PROFILE

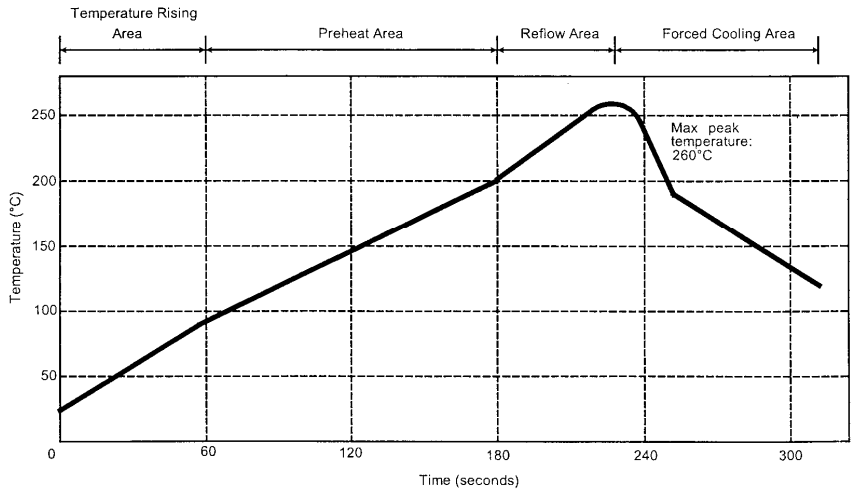

Parameter	Value	Unit
Temperature rising Area	1 - 4	°C/sec
Max Peak Temperature	260	°C
Max dwell time @260°C	10	sec
Min dwell time @235°C	20	sec
Max dwell time @235°C	60	sec
Temperature drop in cooling Area	-1 to - 4	°C/sec
Max dwell time above 100°C	420	sec

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

RADIALL®

Downloaded from Arrow.com.