DESCRIPTION: M5 MALE - RIGHT ANGLE - 4 POSITION

SPECIFICATIONS:

MATERIALS:


HOUSING:	PBT, UL94 V-0, BLACK
CONTACTS:	GOLD PLATED BRASS (SEE P/N KEY BELOW)
NUT:	NICKEL PLATED BRASS
SHELL:	NICKEL PLATED BRASS
ORING:	EPDM, BLACK


ELECTRICAL:

RATED CURRENT:	1A
RATED VOLTAGE:	60V
INSULATION RESISTANCE:	100 MOhms MIN.
CONTACT RESISTANCE:	10 mOhms MAX.

ENVIRONMENT:


OPERATING TEMPERATURE:	-40°C TO +85°C
WATER PROOF:	IP67

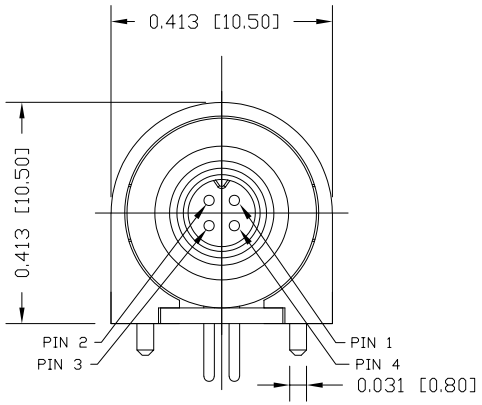

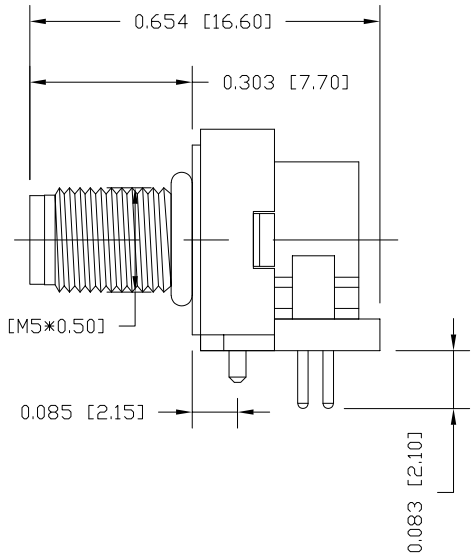


853-004-113R00Y


1 = GOLD FLASH
4 = 10u" GOLD

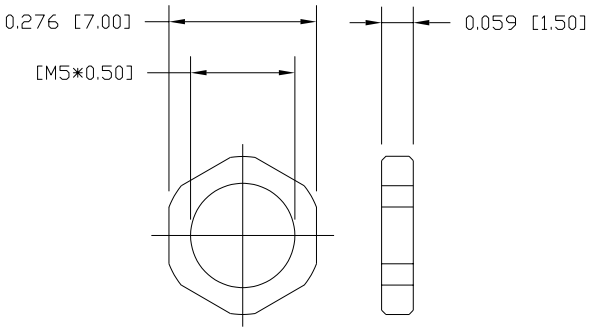

NUT



RECOMMEND PANEL CUT-OUT
MAX. PANEL THICKNESS: 0.063" [1.60]

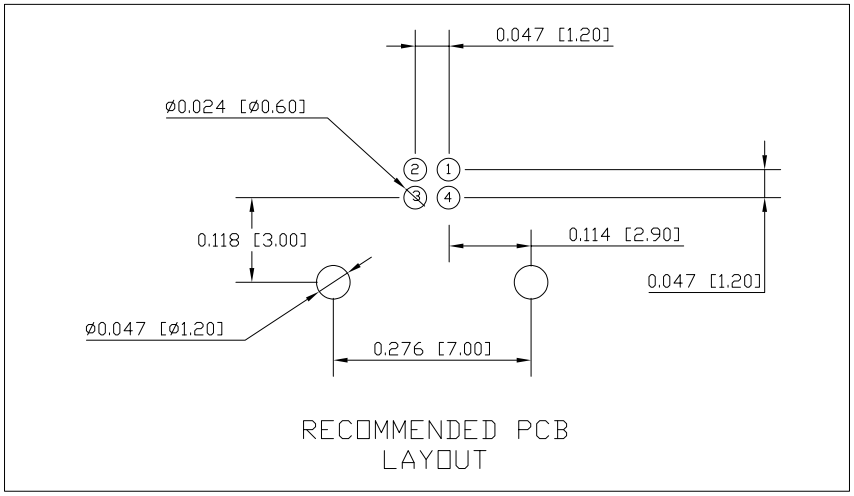

RECOMMENDED PCB LAYOUT

RoHS COMPLIANT

UNITS = inch [mm]

DO NOT SCALE FROM DRAWING

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:	M. SIGMON
DATE:	03/04/2016

NorComp

SCALE: NTS	SHEET 1 OF 1	REV 8
DWG NO. 853-004-113R00Y		

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

NorComp:

SFP6715 8P1P00217BGL521 CCA-015-M.5R152 T58-D04-MMMR001 180-044-173L020 822B006-273L501 178-015-313R491 858-R03-103RSS4 T54-B05-FFFR001 181-044-113R531 680S3W3103L201 970-025-030R121 GCHDLPF15M15F HDF-R44-213L011 852-002-113R004 8P1P003200GRB01 8P1P005210GRBR1 8P1P01417BGL521 CCA-000-M03R215 HDF-R15-113L461 Y54-A04-MFFR001 172-025-113R021 820B007-203RF01 SFP67SS25 180-026-203L031 CDFS17W2103L411 S58-A04-MMR001 171-037-213R001 SDF-R37-113L461 SDF-V09-213L011