



REV.	DATE	ECR NO.	DESCRIPTION
NC	01/04/00	XXXXXX	INITIAL RELEASE
A	04/06/06	XXXXXX	UPDATE DRAWING FORMAT
B	07/02/13	XXXXXX	CHANGE FERRULE LENGTH

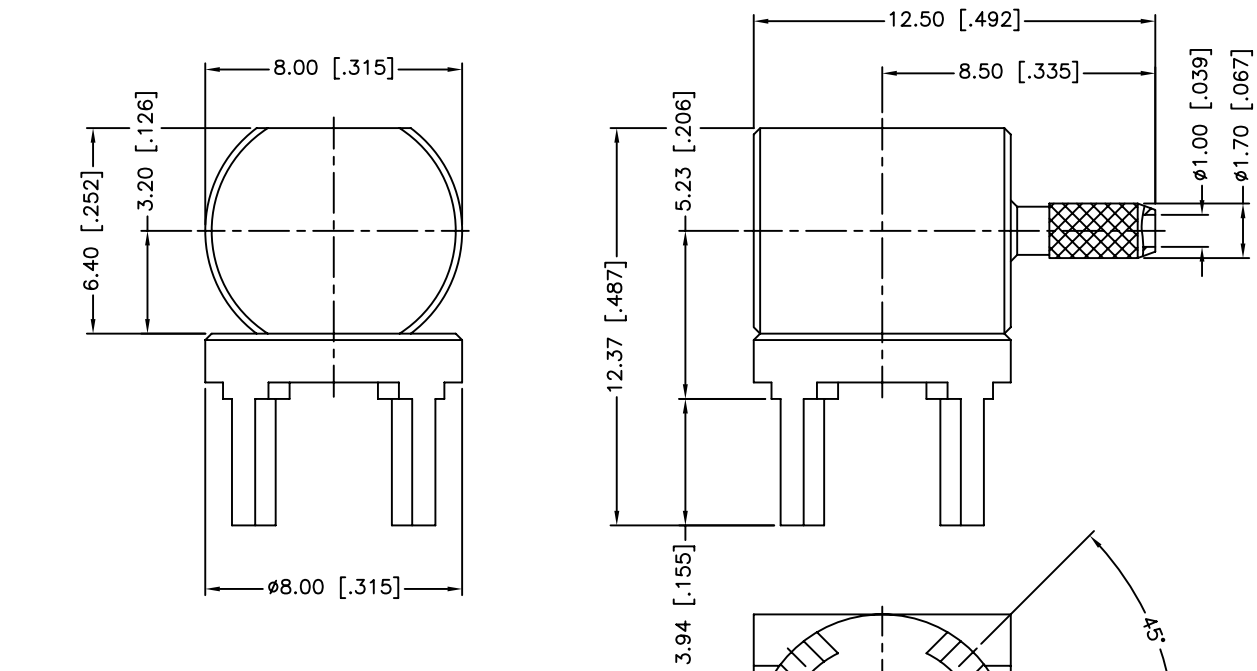



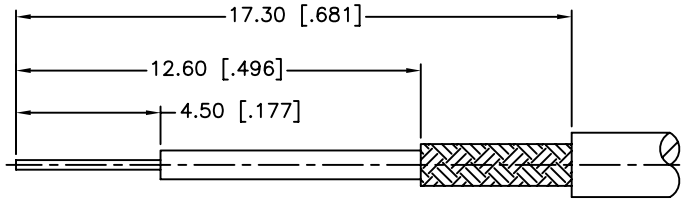

RECOMMENDED
CABLE STRIPPING DIM'S

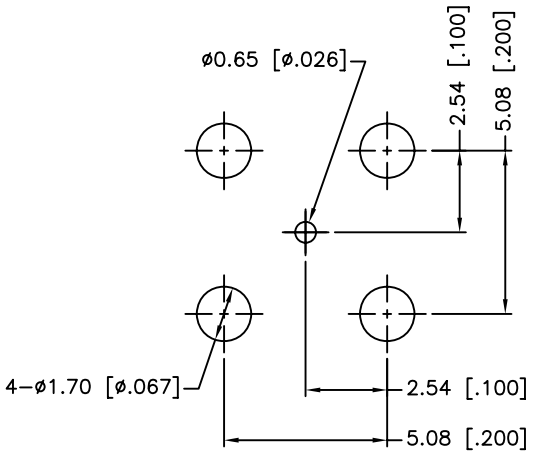

RECOMMENDED
MOUNTING HOLE

1. CRIMPED FERRULE
   HEX CRIMP SIZE .128"

	DESCRIPTION	MATERIAL	FINISH	QTY
3	FERRULE	COPPER	GOLD	1
2	BODY	BRASS	GOLD	1
1	BARREL	BRASS	GOLD	1

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [ ] ARE IN INCHES AND FOR CUSTOMER REFERANCE ONLY.
UNLESS OTHERWISE SPECIFIED
TOLERANCES FOR MILLIMETERS ARE:
<0.5 ± 0.05mm
0.5 – 6mm ± 0.10mm
6 – 30mm ± 0.20mm
30 – 120mm ± 0.30mm
ANGLES ± 1°
UNLESS OTHERWISE SPECIFIED
TOLERANCES FOR INCHES ARE:
<.020 ± 0.002"
.020 – .236 = ± 0.004"
.236 – 1.180 = ± 0.007"
1.180 – 4.724 = ± 0.012"
ANGLES ± 1°
DO NOT SCALE DRAWING

APPROVALS	DATE
DRAWN M.ZHANG	07/02/13
CHECKED	
ISSUED	
SHEET 1 OF 1	

CAD FILE C:/CONNEX/142270.DWG

Amphenol Connex

PART DESCRIPTION
R/A PCB CABLE TERMINAL
(FOR RG–178B/U, 196A/U)

PART NO. 142270

DWG. NO.	REV.	SIZE	SCALE
142270.DWG	B	A	NA

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Amphenol:

70234-112LF 86093488314745V1LF 86093968813H45V1LF 91614-403ALF LD15P33E4GV00LF RJSBE5080C2 54202-S08-07LF 86130202123355E1LF D15P13A6RV12LF DAPO15S365TLF RJE061661210 68002116HLF DEM09P032N 65781-158 DCMF37P 54202-G0805CLF 95157-140LF 68001-108HLF 68001-200HLF 69192-408HLF 70218-1116LF 70430-164LF 76384-316LF 86093967896755LF 86093968191755E3LF 863013A 67996-204HLF 68000-236HLF CD15S13E4RV09LF LD25S33E4GV00LF