N-Channel and P-Channel Enhancement Mode Power MOSFET

Features

- N-Channel: 30V, 10A

  $R_{DS(ON)}$< 15 mΩ @ V_{GS} = 10V
  $R_{DS(ON)}$ <23 mΩ @ V_{GS} = 4.5V

- P-Channel: -30V, -12A

  $R_{DS(ON)}$< 34 mΩ@ V_{GS} = -10V
  $R_{DS(ON)}$ < 49 mΩ @ V_{GS} = -4.5V

General Features

- Advanced Trench Technology
- Provide Excellent RDS(ON) and Low Gate Charge
- Lead Free and Green Available

100% UIS TESTED!
100% ΔVds TESTED!

RoHS

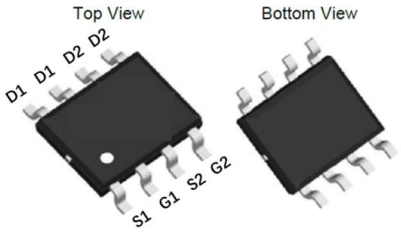

SOP-8 Dual



Pin Assignment

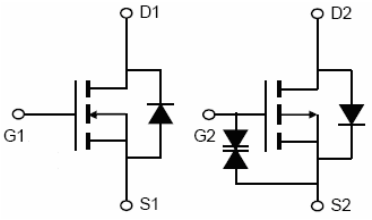

Schematic diagram

■ Absolute Maximum Ratings (T_A=25℃ unless otherwise noted)

Parameter		Symbol	NMOS	PMOS	Unit
Drain-source Voltage		V_{DS}	30	-30	V
Gate-source Voltage		V_{GS}	±20	±20	V
Drain Current	T_A=25℃	I_D	7	-5	A
	T_A=100℃		4.4	-3	
Pulsed Drain Current [A]		I_{DM}	60	-40	A
Total Power Dissipation [B]	T_A=25℃	P_D	2	2	W
	T_A=100℃		0.8	0.8	
Junction and Storage Temperature Range		T_J ,T_{STG}	-55～+150	-55～+150	℃

■Thermal resistance

Parameter		Symbol	NMOS		PMOS		Units
			Typ	Max	Typ	Max	
Thermal Resistance Junction-to-Ambient [C]	Steady-State	$R_{\theta JA}$	50	60	50	60	℃/W

■ NMOS Electrical Characteristics (T_J=25℃ unless otherwise noted)

Parameter	Symbol	Conditions	Min	Typ	Max	Units
Static Parameter						
Drain-Source Breakdown Voltage	BV_{DSS}	V_{GS}= 0V, I_D=250μA	30	-	-	V
Zero Gate Voltage Drain Current	I_{DSS}	V_{DS}=30V, V_{GS}=0V	-	-	1	μA
		V_{DS}=30V, V_{GS}=0V, Tj=150℃	-	-	100	
Gate-Body Leakage Current	I_{GSS}	V_{GS}= ±20V, V_{DS}=0V	-	-	±100	nA
Gate Threshold Voltage	$V_{GS(th)}$	V_{DS}= V_{GS}, I_D=250μA	1.0		2.5	V
Static Drain-Source On-Resistance	$R_{DS(on)}$	V_{GS}=10V, I_D=7A	-		15	mΩ
		V_{GS}=4.5V, I_D=5A	-		23	
Diode Forward Voltage	V_{SD}	I_S=7A, V_{GS}=0V	-	-	1.2	V
Gate resistance	R_G	f=1MHz	-	2	-	Ω
Maximum Body-Diode Continuous Current	I_S		-	-	7	A
Dynamic Parameters						
Input Capacitance	C_{iss}	V_{DS}=15V, V_{GS}=0V, f=1MHz	-	380	-	pF
Output Capacitance	C_{oss}		-	75	-	
Reverse Transfer Capacitance	C_{rss}		-	60	-	
Switching Parameters						
Total Gate Charge	Q_g	V_{GS}=10V, V_{DS}=15V, I_D=7A	-	12.5	-	nC
Gate-Source Charge	Q_{gs}		-	2.5	-	
Gate-Drain Charge	Q_{gd}		-	2.5	-	
Reverse Recovery Charge	Q_{rr}	I_F=7A, di/dt=100A/us	-	1.5	-	nC
Reverse Recovery Time	t_{rr}		-	16	-	ns
Turn-on Delay Time	$t_{D(on)}$	V_{GS}=10V, V_{DD}=15V, I_D=7A R_{GEN}=3Ω	-	5	-	ns
Turn-on Rise Time	t_r		-	30	-	
Turn-off Delay Time	$t_{D(off)}$		-	15	-	
Turn-off fall Time	t_f		-	20	-	

■ PMOS Electrical Characteristics (T_J=25℃ unless otherwise noted)

Parameter	Symbol	Conditions	Min	Typ	Max	Units
Static Parameter						
Drain-Source Breakdown Voltage	BV_{DSS}	V_{GS}= 0V, I_D=-250μA	-30	-	-	V
Zero Gate Voltage Drain Current	I_{DSS}	V_{DS}=-30V, V_{GS}=0V	-	-	-1	μA
		V_{DS}=-30V, V_{GS}=0V, Tj=150℃	-	-	-100	
Gate-Body Leakage Current	I_{GSS}	V_{GS}= ±20V, V_{DS}=0V	-	-	±100	nA
Gate Threshold Voltage	$V_{GS(th)}$	V_{DS}= V_{GS}, I_D=-250μA	-1.0		-2.5	V
Static Drain-Source On-Resistance	$R_{DS(on)}$	V_{GS}=-10V, I_D=-5A	-		34	mΩ
		V_{GS}=-4.5V, I_D=-3.5A	-		49	
Diode Forward Voltage	V_{SD}	I_S=-5A, V_{GS}=0V	-	-	-1.2	V
Gate resistance	R_G	f=1MHz	-	15	-	Ω
Maximum Body-Diode Continuous Current	I_S		-	-	-5	A
Dynamic Parameters						
Input Capacitance	C_{iss}	V_{DS}=-15V, V_{GS}=0V, f=1MHz	-	490	-	pF
Output Capacitance	C_{oss}		-	75	-	
Reverse Transfer Capacitance	C_{rss}		-	60	-	
Switching Parameters						
Total Gate Charge	Q_g	V_{GS}=-10V, V_{DS}=-15V, I_D=-5A	-	9	-	nC
Gate-Source Charge	Q_{gs}		-	1.5	-	
Gate-Drain Charge	Q_{gd}		-	2.3	-	
Reverse Recovery Charge	Q_{rr}	I_F=-5A, di/dt=100A/us	-	12	-	nC
Reverse Recovery Time	t_{rr}		-	32	-	ns
Turn-on Delay Time	$t_{D(on)}$	V_{GS}=-10V, V_{DD}=-15V, ID=-5A R_{GEN}=2.5Ω	-	9	-	ns
Turn-on Rise Time	t_r		-	3	-	
Turn-off Delay Time	$t_{D(off)}$		-	29	-	
Turn-off fall Time	t_f		-	15	-	

A. Repetitive rating; pulse width limited by max. junction temperature.
B. P_d is based on max. junction temperature, using junction-case thermal resistance.
C. The value of $R_{\theta JA}$ is measured with the device mounted on 1 in^2 FR-4 board with 2oz. Copper, in the still air environment with T_A =25℃. The maximum allowed junction temperature of 150℃. The value in any given application depends on the user's specific board design.

■ NMOS Typical Electrical and Thermal Characteristics Diagrams

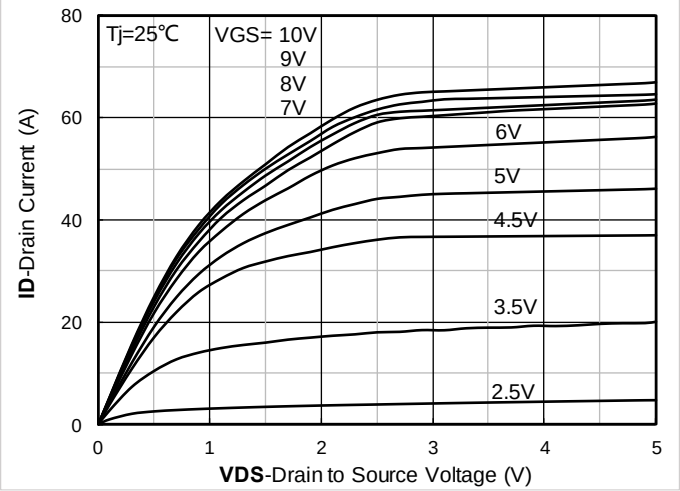

Figure 1. Output Characteristics

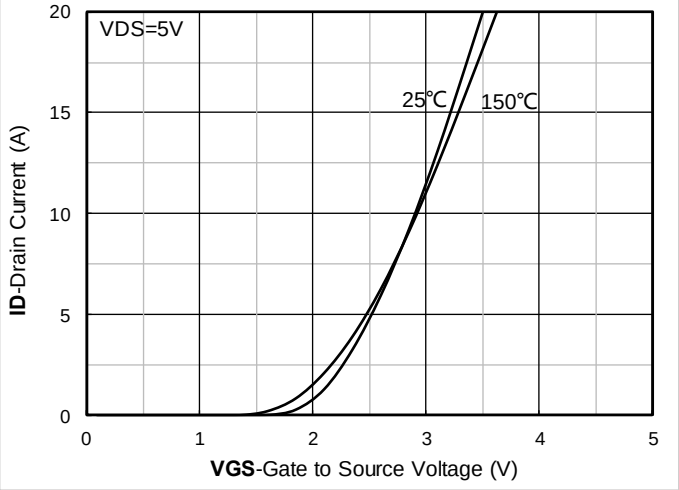

Figure 2. Transfer Characteristics

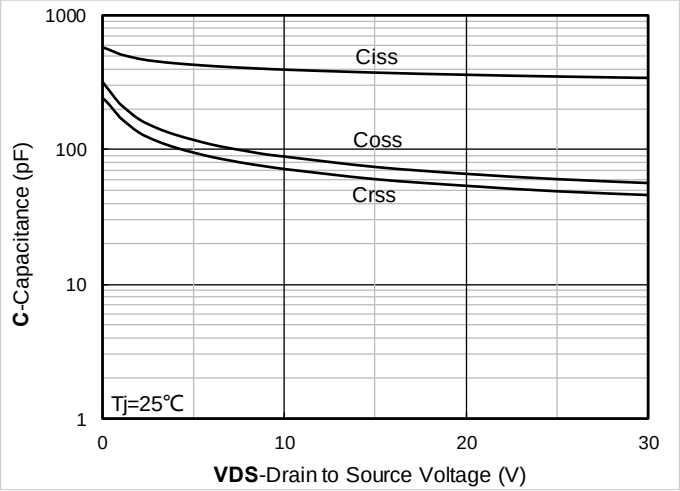

Figure 3. Capacitance Characteristics

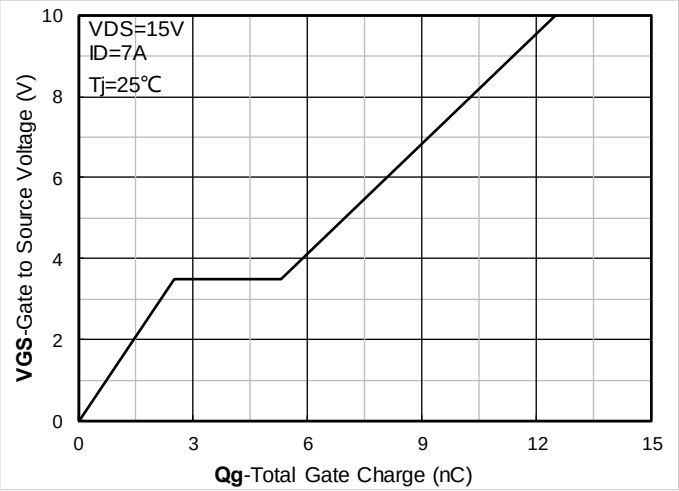

Figure 4. Gate Charge

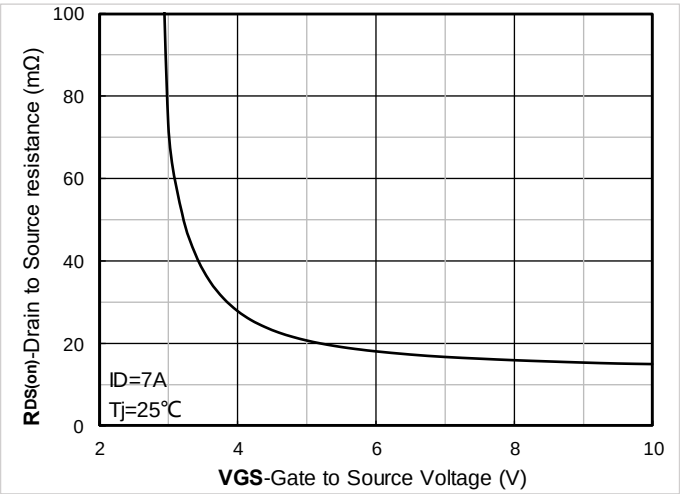

Figure 5. On-Resistance vs Gate to Source Voltage

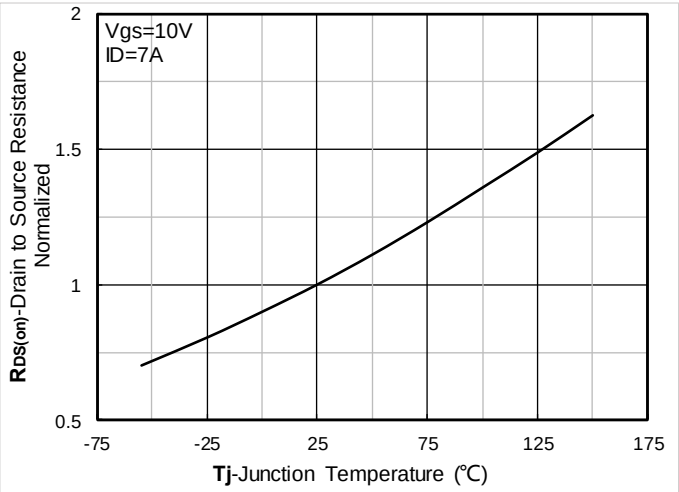

Figure 6. Normalized On- Resistance

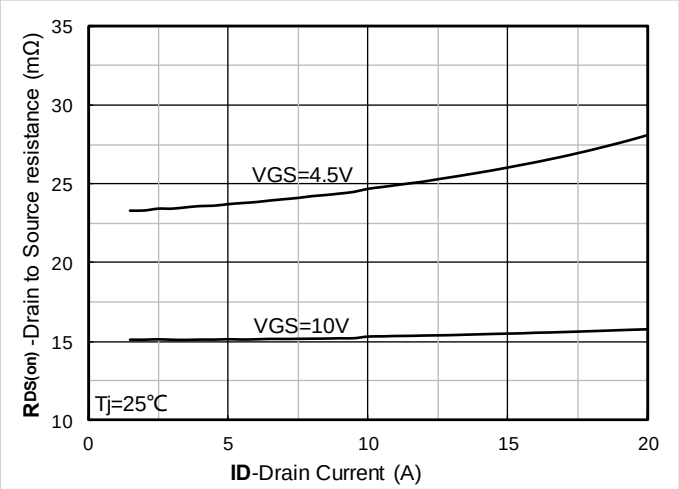

Figure 7. $R_{DS(on)}$ VS Drain Current

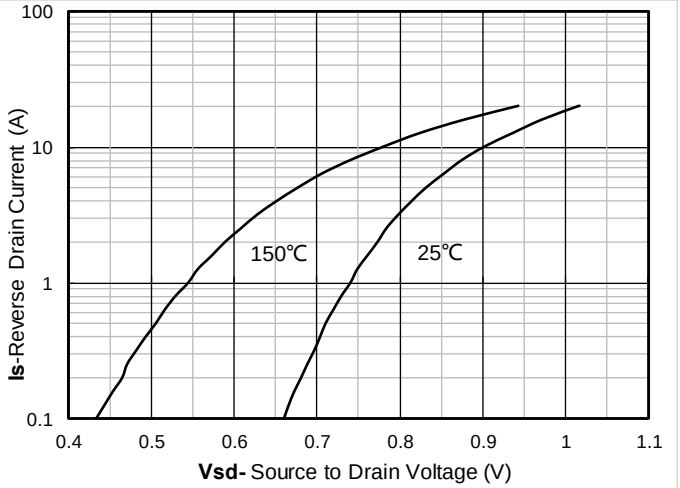

Figure 8. Forward characteristics of reverse diode

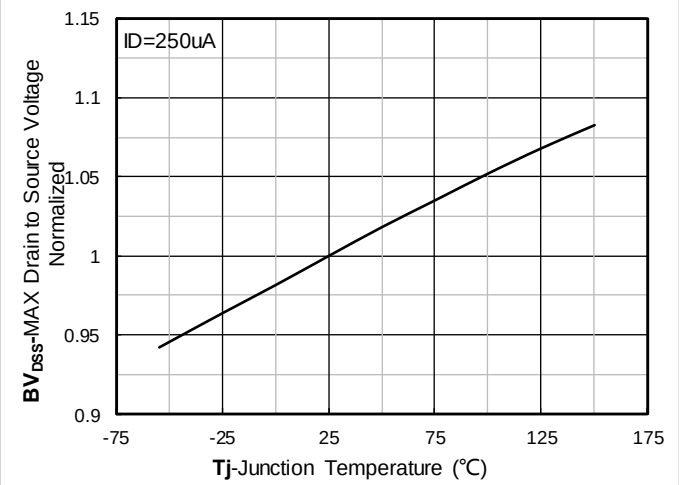

Figure 9. Normalized breakdown voltage

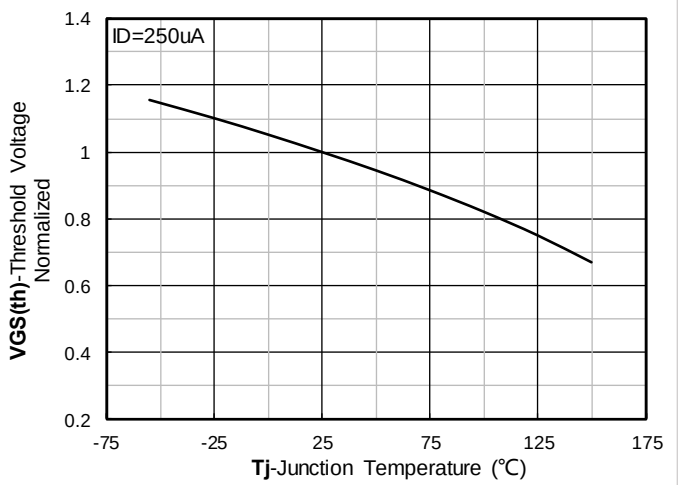

Figure 10. Normalized Threshold voltage

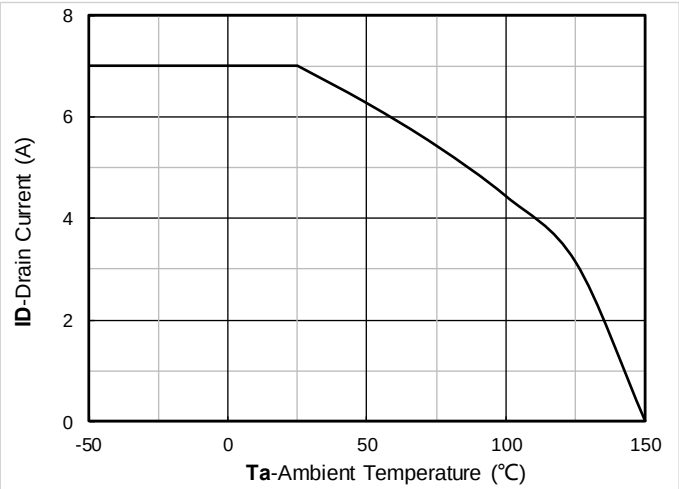

Figure 11. Current dissipation

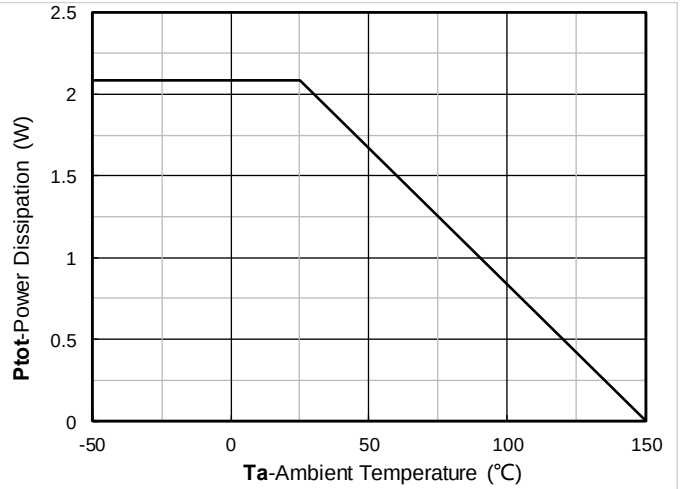

Figure 12. Power dissipation

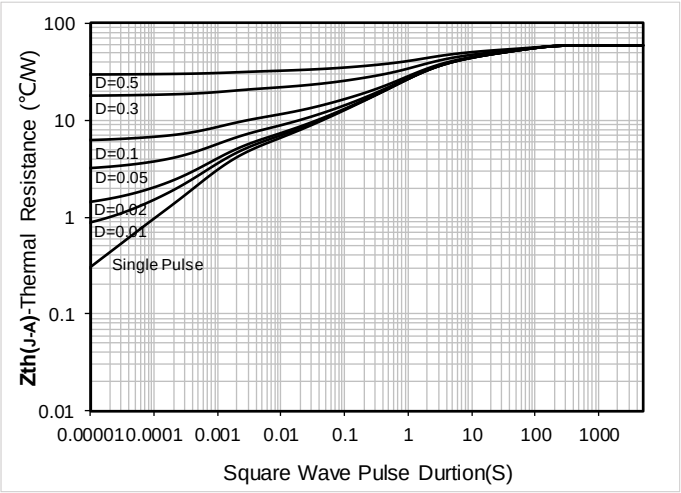

Figure 13. Maximum Transient Thermal Impedance

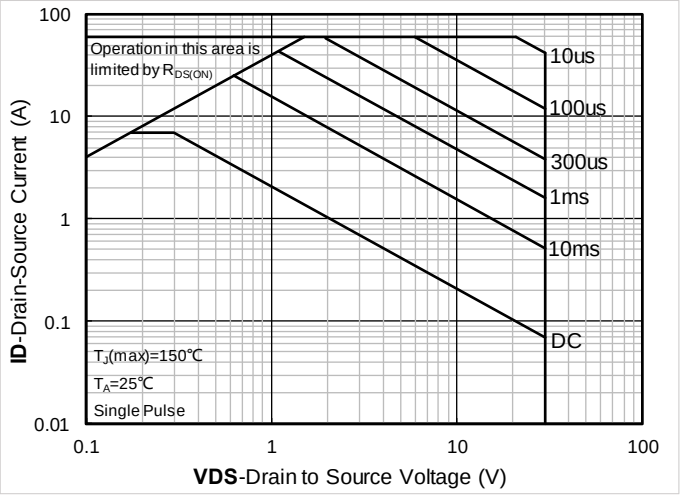

Figure 14. Safe Operation Area

■ PMOS Typical Electrical and Thermal Characteristics Diagrams

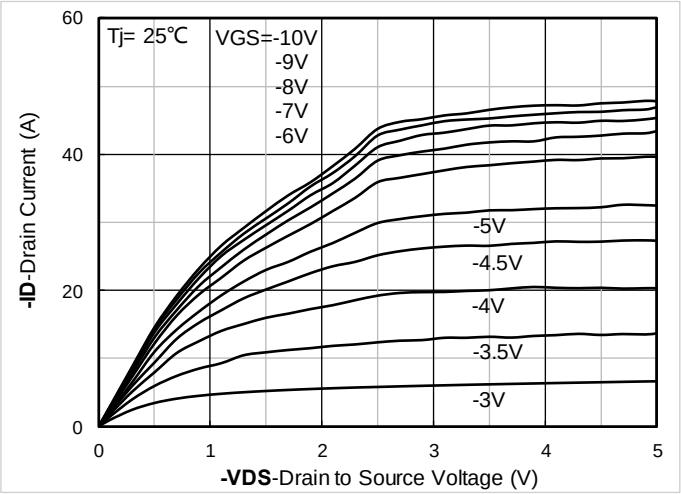

Figure 1. Output Characteristics

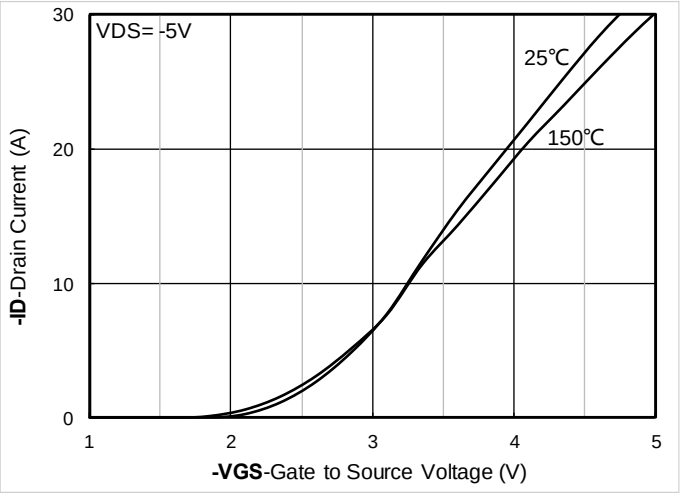

Figure 2. Transfer Characteristics

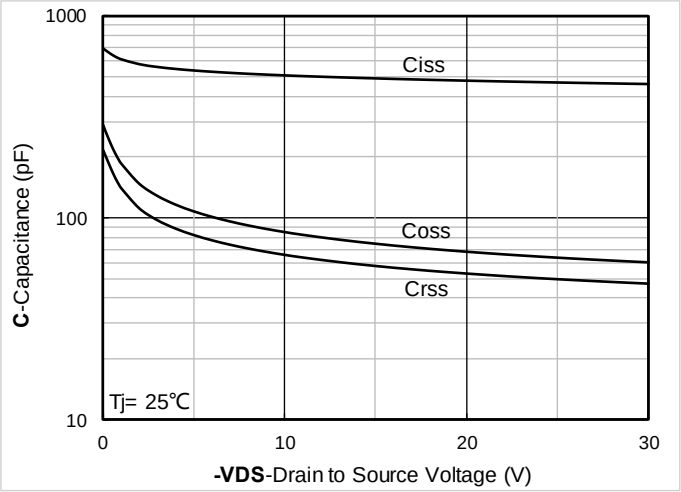

Figure 3. Capacitance Characteristics

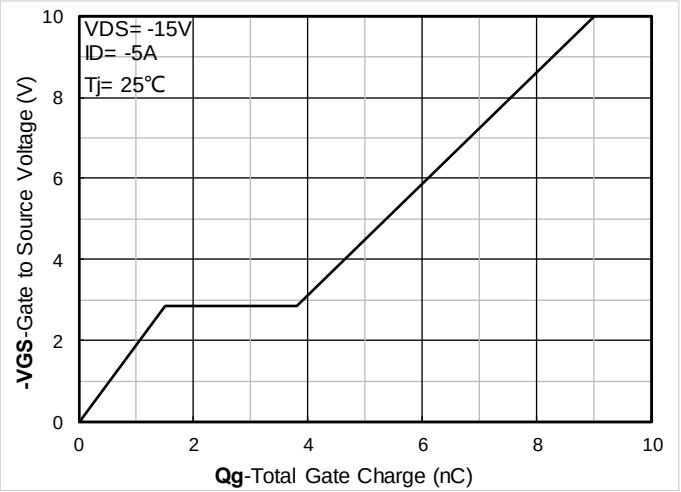

Figure 4. Gate Charge

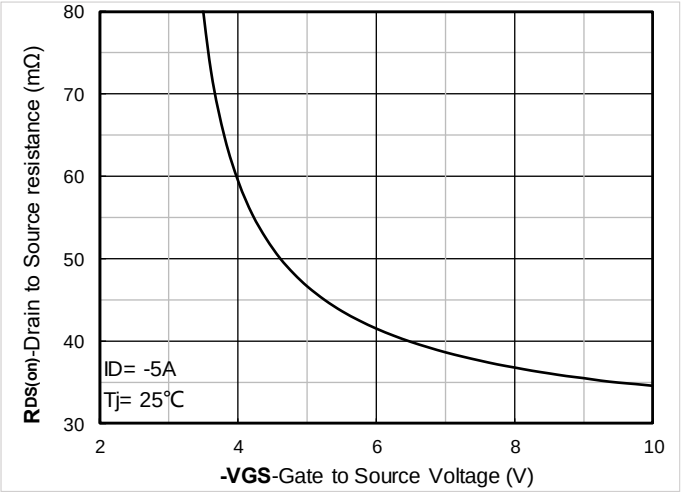

Figure 5. On-Resistance vs Gate to Source Voltage

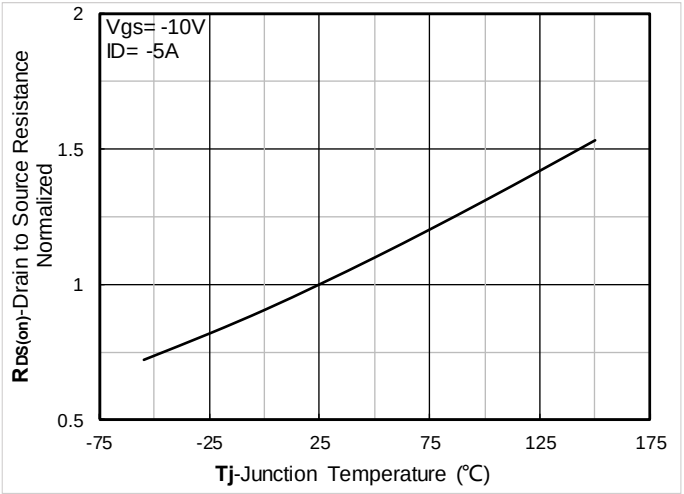

Figure 6. Normalized On-Resistance

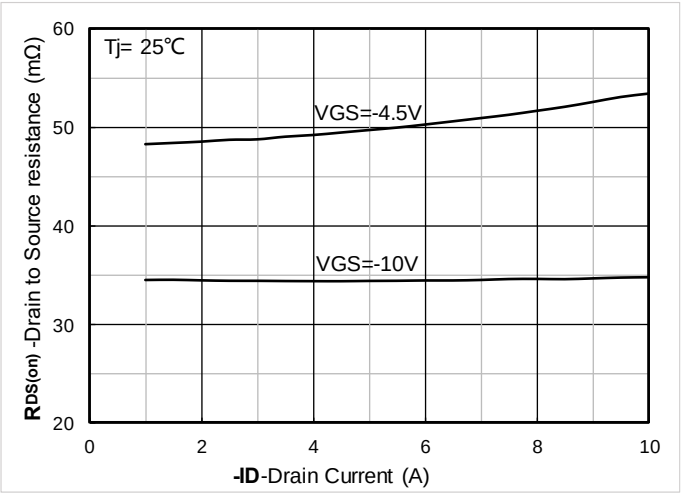

Figure 7. $R_{DS(on)}$ VS Drain Current

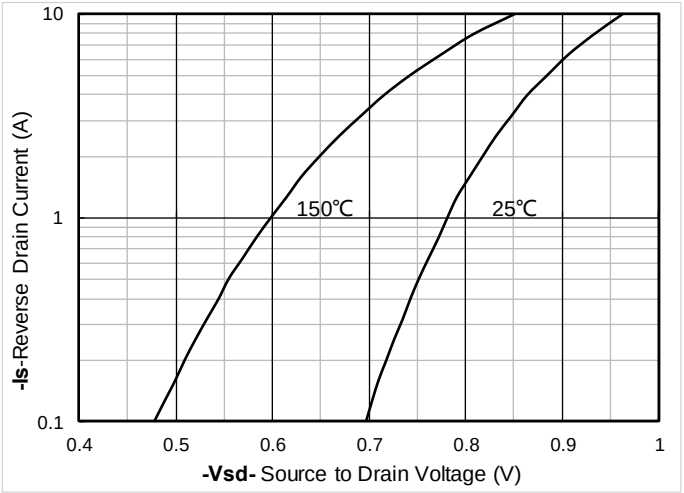

Figure 8. Forward characteristics of reverse diode

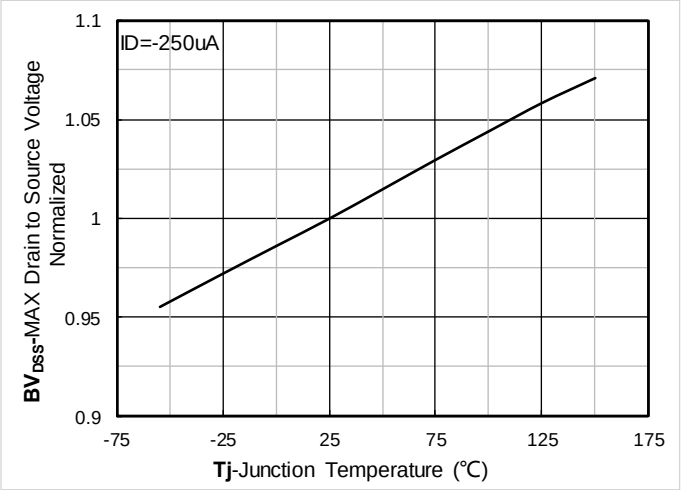

Figure 9. Normalized breakdown voltage

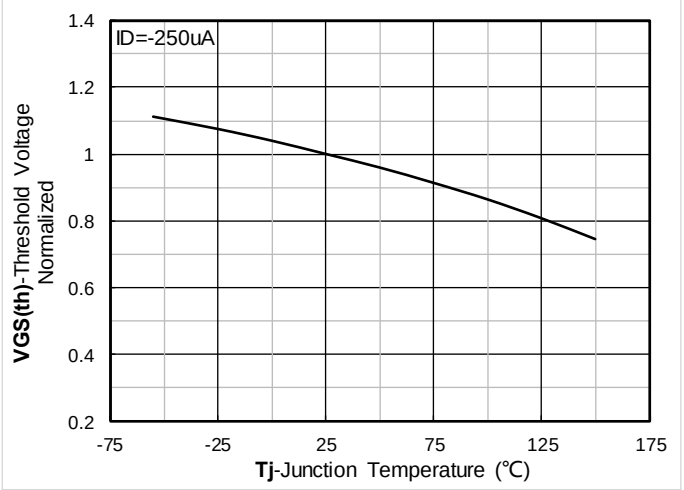

Figure 10. Normalized Threshold voltage

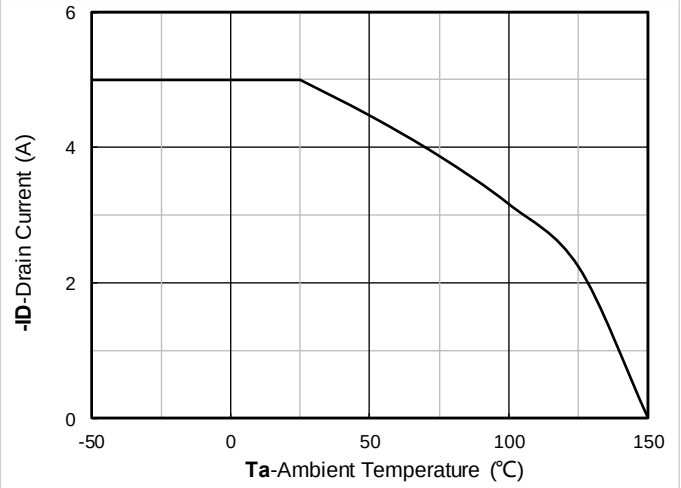

Figure 11. Current dissipation

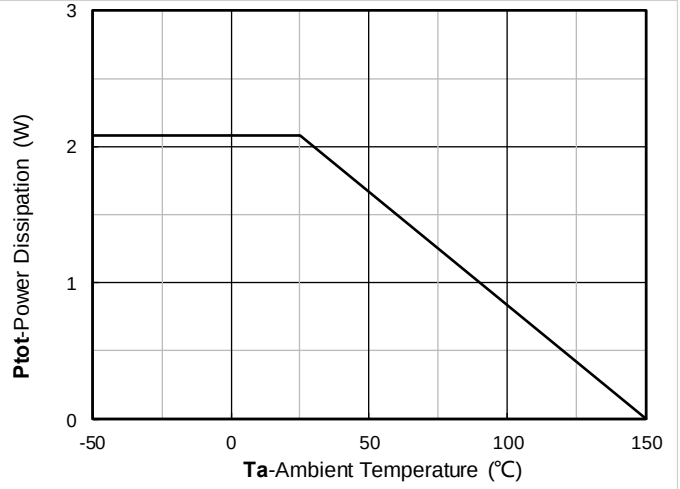

Figure 12. Power dissipation

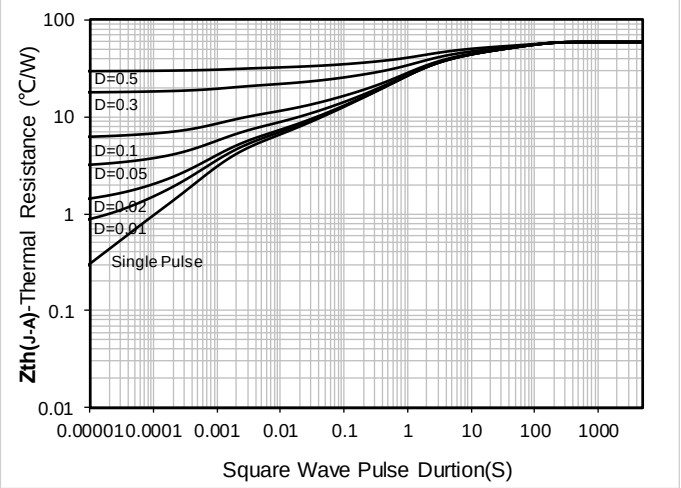

Figure 13. Maximum Transient Thermal Impedance

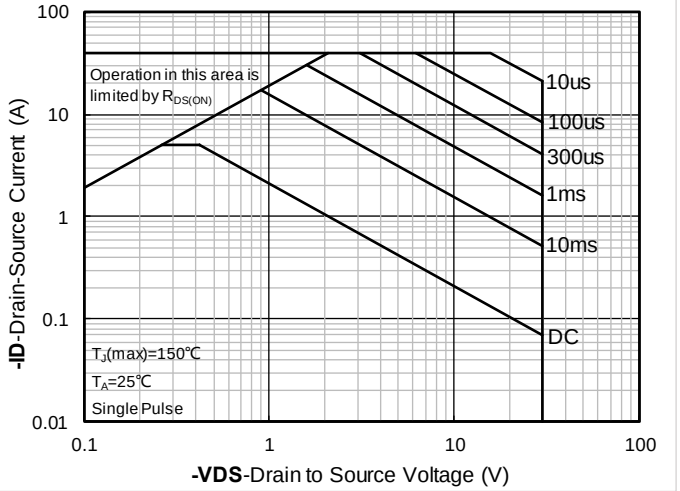

Figure 14. Safe Operation Area