



Specifications:
Current Rating:1.5A AC/DC(VBS&GND)
0.25A AC/DC(Others)
Voltage Rating: 30V AC/DC
Contact Resistance:30m ohm. Max.(VBS&GND)
50m ohm. Max.(Others)
Insulation Resistance:100M ohm. Min.
Withstanding Voltage:100V AC For One Minute
Operating Temperature Range:−40°C to +105°C
Material and Finish
Insulator:PBT (UL94V−0)
Insulator Color:Blue
Contact:Phosphor Bronze
Plating:15u" Gold Plated on Contact Area,
Tin Plated on Solder Tail.
Shell:Brass,Nickel Plated



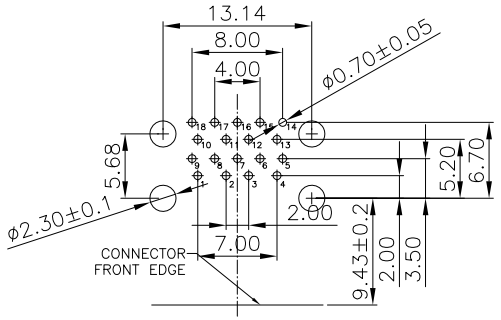

PCB layout(TOP VIEW)

RoHS Compliant

REV	DATE	FILE	BY
	05−FEB−2020		

DRAWN: JAMIE
CHECKED: JERRY
APPROVAL: RORY

GENERAL TOLERANCE:
.X=±0.20
.XX=±0.10

UNIT: MM
SCALE:1:1
SHEET: 1 / 2
PROJECTION:

CnC Tech
Industrial Cable and Connector Technology

DESCRIPTION:
USB 3.0 AF Double Rows Right Angle Dip Type,15u"

PART NO:
1003-004-01010

SIZE
A4

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

CNC Technology:

2000-1-2-41-00-BK 3135-18-1-0500-003-1-TS 911S-2-5-00700-PL 1002-003-02000
1007-20-1-2000-007-1-TS 3132-22-1-0500-001-1-TS CNC-SAE-16-183-002 102-1030-BE-00100
302-28-26-GR-0100F 521-26-04-SV-005F 3135-18-1-0500-005-1-TS 3239-16-1-0500-005-1-TS
51025-10-0100-01 1569-18-1-0500-008-1-TS 1569-22-1-0500-007-1-TS 3132-24-1-0500-002-1-TS
521-26-04-SV-014F 523-26-6600-SV-0010F 10064-30-1-0500-007-1-TS 1332-22-1-0500-001-1-TS
3122-18-1-0500-002-1-TS 3239-20-1-0500-002-1-TS 3522-20-0100-99 1569-22-1-0500-006-1-TS
3221-26-0300-00 512-26-8800-BL-0007F 520-26-4400-SV-0010F 1007-18-1-2000-007-1-TD
3521-08-0101-99 743-60010-00200