
This document contains proprietary information and such informationmay not be disclosed to others for any purposes,
not used for sales/marketing/procurement purposes without written permission

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release	———	H.wei	19/03/17	19/03/17

1 电气性能

1.1 特性阻抗	50Ω
1.2 频率	DC～4GHz
1.3 介质耐压	750V
1.4 中心导体电阻	≤ 6MΩ
1.5 外导体电阻	≤ 1MΩ
1.6 绝缘电阻	≥1000MΩ
1.7 VSWR	≤1.30：1

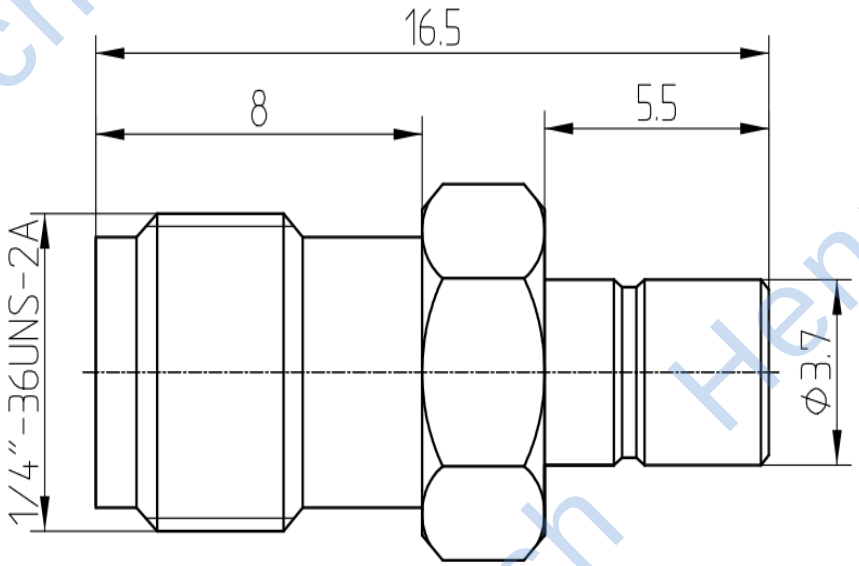

2 材料及涂覆

2.1 外壳：	黄铜;镀金
2.2 绝缘子：	Teflon
2.3 内导体：	铍青铜;镀金

Notes:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: H.wei 19/03/17	TITLE: RF Adaptor SMA Female to SMB Male				
ENGINEER: L.yu 19/03/17					
APPROVED: W.yi 19/03/17					
TOLERANCES UNLESS OTHERWISE SPEFICIED X ±0.50 .X ±0.20 .XX ±0.10 ANGLES ±1°		HenryTech			
	PART NO: HL-SMA-SMB-KJ	DIMENSION IN MILLIMETERS (mm)	SIZE: A4	SCALE: N/A	SHEET: 1/1	REV: A

HenryTech

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

HenryTech:

HT-LFCG-1700+ HT-SCA-4-10+ H3-MABA-007871-CT1A40 H3-TC1-1TG2+ HG-SCN-2-65+
HL-SSMA-KHD-1 HT-LFCN-3800+ H3-MABA-010551-CF1071 HLCC2250G HL-SMA-KHD4
HN-DC2016-0.5(12-4.6)M HT-HFCN-3800+ HT-LFCG-530+ HL-N-KKC HT-LFCN-400+ HX-SMA/SMP-JK
H2SYDC-20-62HP+ H3-MABA-011085 H3-MAPD-008109-C30040 HL-SMAMF-2-18-15dB
HN-LP7-0.5-1.27(9.4-2.8) HT-BFHKI-1572+ HG-SCN-2-22+ HL-SMA/SMB-KK HL-SMB-K3DY
HT-HFCN-2700+ HL-MCX-KE-02 HX-N-JK HT-QCN-19+ HX-1.85-JJ