


由 Autodesk 教育版产品制作


C款，正向10.0两脚,SMT-*6.20


MAPX	MODIFICATION	DATE



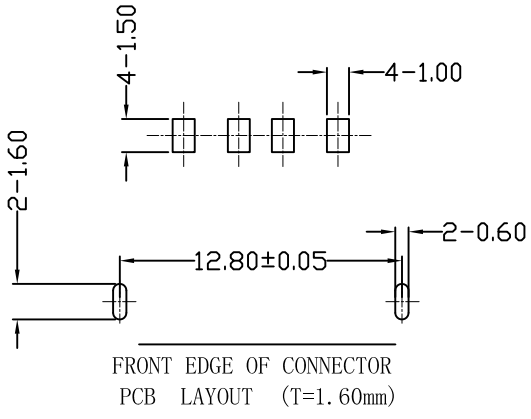

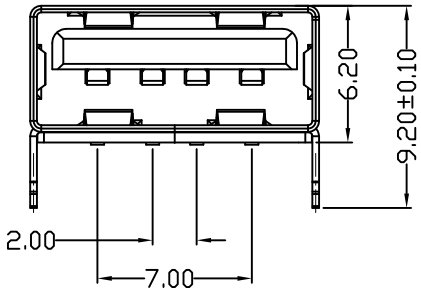





NOTES:

1. HOUSING: SEE NOTES,
   TERMINAL: SEE NOTES.
   SHELL: SEE NOTES.

SPECIFICATION:

1. ELECTRICAL CHARACTERISTIC:
   CONTACT RESISTANCE: 30MΩ MAX
   DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1MIN
   INSULATION RESISTANCE: 1000MΩ MIN
2. MECHANICAL CHARACTERISTIC:
   INSERTION FORCE: 35N(3.57KGF) MAX
   EXTRACTION FORCE: 10~35N(1.02~3.57KGF)MIN
   DURABILITY: 1500 CYCLES EXTRACTION FORCE:10~35N
   5000 CYCLES MIN
   5000 CYCLES EXTRACTION FORCE:3~35N
3. ENVIRONMENTAL:
   OPERATING TEMPERATURE: -55℃+85℃
4. Contact finish:
   01:Selective Gold Flash
   02:Selective Gold 3U″
   03:Selective Gold 5U″
   04:Selective Gold 15U″
   05:Selective Gold 30U″

产品图 PRODUCT CHART DWG			
公差一览表 TOLERANCE UNLESS OTHERMSE			
		X.	±5.°
		.X	±2.°
		.XX	±1.°
.XXX	±0.03	.XXX	±0.5°

深圳市精拓金电子有限公司

单位 UNITS	MM	制图 DRAWING	Z-Y-B	制图料号 PRODUCT PART NO.	910-161A2026S10200
比例 SCALE	1:1	审核 CHKD		产品名称 PRODUCT NO.	AF10.0C款前两脚无边铁壳LCP 黑胶6.2SMT无耳朵
日期 DATE	2012.10.15	核准 APP'D		角法 VIEW	版本 VER A□

由 Autodesk 教育版产品制作

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Jing extension:

904-232B2032S10100 907-111A1022D10200 920-A64A2091S101A3 920-F52A2021S10105
904-331B2032S10200 906-752B1114D10200 908-351A1011D10100 911-221A2021S10100
918-318K2023C40005 906-262A1021D10200 912-112A2021S10100 920-154A2021Y10110
920-C52A2021S10105 905-761A2032S10200 916-151A1022Y10200 917-B88C201AH70201
917-P81A202ES60201 918-468K2029Y50000 920-A62A2021S10108 906-552A1012D10200
904-232A2031S10100 907-312A1101Y10210 918-418K2022Y40011 920-C62A2021S10103
910-151A2021D10100 912-112A1011D10100 912-312A1012D10100 918-415K3028S40000
919-162A1012D10400 920-A62A2021S10104