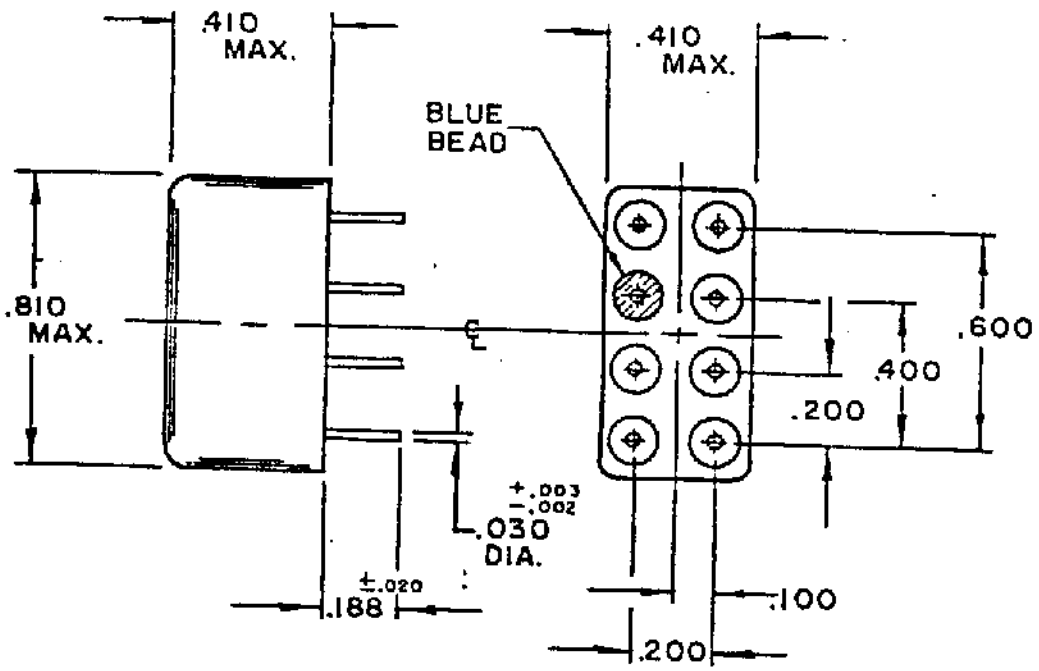


COIL: @ +25°C

RESISTANCE 2074 OHMS ± 10%

NOMINAL VOLTAGE 26.5 VDC

MUST OPERATE 14.4 VDC

MUST RELEASE 1.4 v VDC

ENVIRONMENT:


VIBRATION 10 CPS TO 2000 CPS AT 20 g's

SHOCK 100 g's 6 ±1 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES:

CUSTOMER DATA SHEET

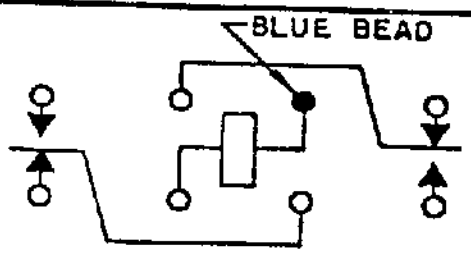

CONTACT RATING: 2 AMPS, 28 VDC Low Level 100,000 Operations

DR. 5-30-85 CK. OSW

Communications Instruments, Inc.

CUST. Hi-G

CUST. NO. 2KA-2A-126

TYPE HMS RELAY

HMS1201S03

SUPERSEDED
NOT the LATEST
REVISION