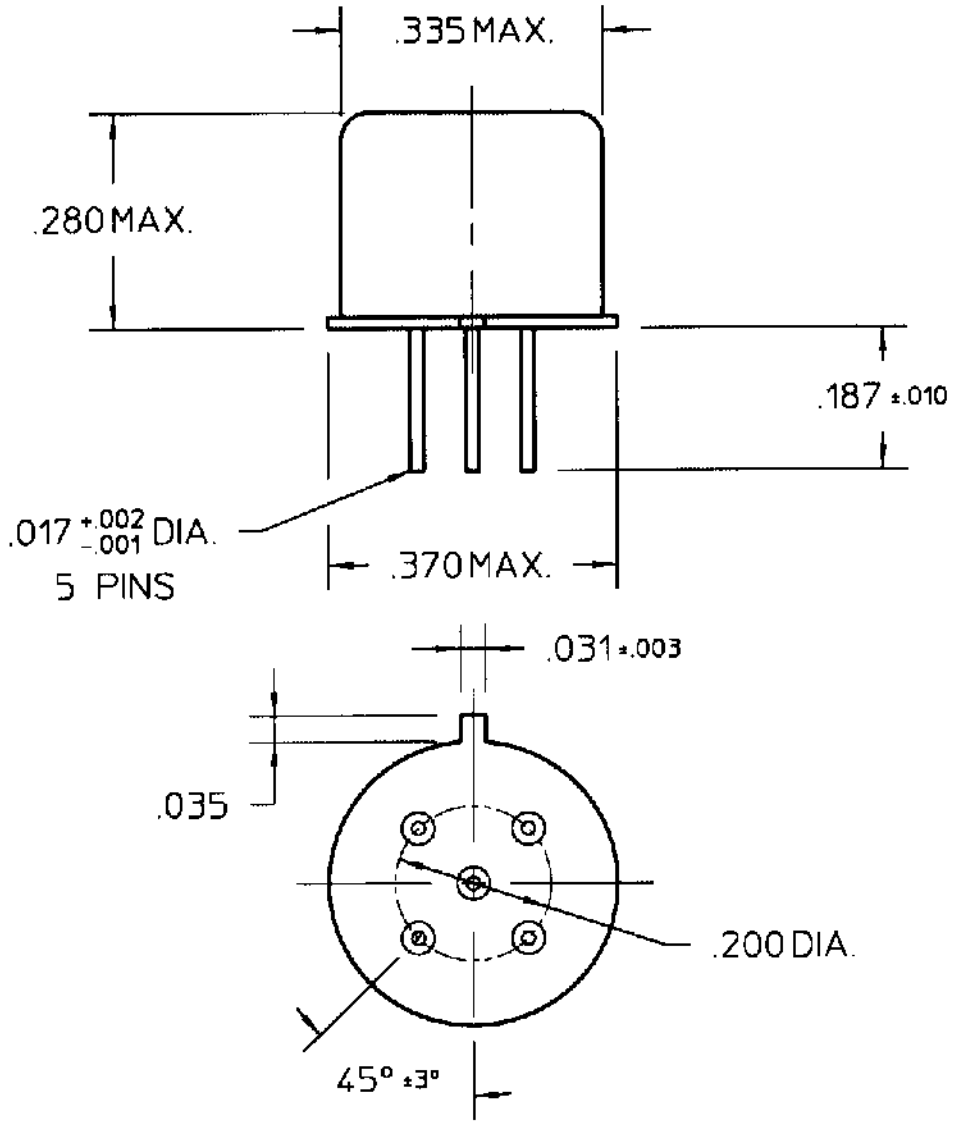


COIL: @ 25°C

RESISTANCE	500 OHMS ± 10%
NOMINAL VOLTAGE	12.0 VDC
MUST OPERATE	7.0 VDC
MUST RELEASE	4.0 VDC MAX. 0.63 VDC MIN.

ENVIRONMENT:


VIBRATION 10 CPS TO 3000 CPS @ 30 g's

SHOCK 75 g's 6 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE TIME 2.0 MS MAX.
RELEASE TIME 4.0 MS MAX.
CONTACT BOUNCE 1.5 MS MAX.

CUSTOMER DATA SHEET



CONTACT RATING: LOW LEVEL TO 1A
28 VDC RESISTIVE 100,000 OPERATIONS

DR. R.B. 1/15/97 CK. WSD JJR

COMMUNICATIONS INSTRUMENTS, INC.

CUST. QPL
CUST. NO. M39016/23-022L

TYPE J1MAD RELAY

J1MAPD-12XL

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

TE Connectivity:

2005330-1 2310537-1 936348-1 TE50BR39J 3631B101LL 917696-1 CPF0402B37K4E1 CRGCQ2010J3K3
1743455-2 1393431-1 175977-2 2-292161-3 2380312-2 SMW73R0JT 1-962915-1 3430B2F51RTDF
ROX05SJ18R 141991-2 1903112-2 1969656-1 2377783-2 2834055-1 SBCHE64R7K 1-794222-0
3-1393225-0 650075-000 MPT100C18RF RH73H2A40MKTN SBCHE154R7K U5254-000005-030PA