JMACD - 18XLS Product Details

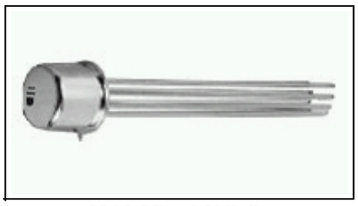

JMACD - 18XLS
(1617122 - 6)
TE Internal Number: 1617122 - 6
Active

Military/Aerospace High Performance Relays

Not EU RoHS or ELV Compliant

Product Highlights:

- MAD TO - 5 Relay Series
- Input Voltage = 18 VDC
- Contact Arrangement = 2 Form C, DPDT, 2 C/O
- Contact - Rated Current = 1 A
- Non Polarized, Monostable Coil - Magnetic System

View all Features

Add to My Part List | Request Sample | Find Similar Products | Buy Product

Quick Links

- Check Pricing & Availability
- Search for Tooling
- Product Feature Selector
- Contact Us About This Product

Documentation & Additional Information

Product Drawings:
- None Available

Catalog Pages/Data Sheets:
- RELAY (PDF, English)

Product Specifications:
- None Available

Application Specifications:
- None Available

Instruction Sheets:
- None Available

CAD Files:
- None Available

List all Documents

Additional Information:
- Product Line Information

Related Products:
- Tooling

Product Features (Please use the Product Drawing for all design activity)

Product Type Features:
- Series = MAD TO - 5 Relay
- Termination Type = Long Leads

Electrical Characteristics:
- Input Voltage (VDC) = 18
- Contact - Rated Current (A) = 1
- Coil Polarity Protection Diode = Without
- Transistor Driver = Without
- Coil Resistance (?) = 880
- MOSFET Driver = Without
- Coil Power Measurement = Milliwatts
- Coil - Rated Power (mW) = 368
- Actuating System = DC
- Shock = 75 G's, 6ms
- Vibration = 30G's, 10 to 3000Hz

Contact Features:
- Mounting Options = PC Board
- Enclosure Type = Hermetically Sealed
- Pin Configuration = .200" x .300" Spreader Pad

Configuration Features:
- Contact Arrangement = 2 Form C, DPDT, 2 C/O
- Coil - Magnetic System = Non Polarized, Monostable
- Coil Suppression Diode = With

Industry Standards:
- Government/Industry Qualification = Yes
- Government/Industry Part Number = M39016/15 - 104L
- RoHS/ELV Compliance = Not ELV/RoHS compliant
- Lead Free Solder Processes = Not suitable for lead free processing
- Approved Standards = M39016 Qualified, L Level

Conditions for Usage:
- Temperature Range (°C) = - 65 – + 125

Other:
- Brand = CII

© 2011 Tyco Electronics Corporation, a TE Connectivity Ltd. company. All Rights Reserved | Privacy Policy

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

TE Connectivity:

2-520103-2 3430B2F51RTDF 1-794222-0 1743455-2 CRGCQ2010J3K3 SMV3W5M6JT SMW73R0JT
640174-1 650075-000 1-1743284-2 1969656-1 2-32562-2 2-520128-2 36161 1488167-1
1MM-HU-D10-VS-00-F-TBP 2377783-2 292230-8 2-292161-3 917790-2 35402K7FT 917696-1 936348-1
1393431-1 2834055-1 3-1393225-0 141991-2 281990-2 352116RFT CRGCQ0805F150R