
EDZ 250

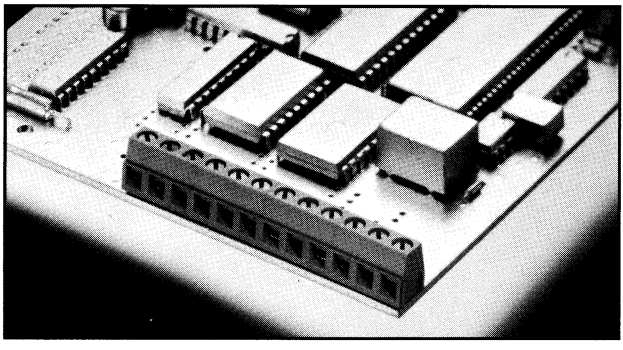

Spacing 5.08 mm
insert required no. of poles ••
How to order see page 6

Ratings:

*Approvals pending

	UL1059 *	CSA 22.2 No. 158 *	EN 60998 *
Rated Voltage	**250 VB**	**300 VB**	**250 V**
Rated Current	**16 A**	**16 A**	**17.5 A (T60)**
Wire Size	**AWG 28-14**	**AWG 28-14**	**1.5 mm²**
Test Voltage			**2.0 kV**
Rated Torque/Screw Size			**0.5 Nm/M3**

Rated Cross Section


Single Wire (solid)	**1.5 mm²**
Stranded Wire (flexible)	**1.5 mm²**
Stranded wire with Ferrules	**1.5 mm²**

Dimensions

Spacing	**5.08 mm**
PCB Hole Diameter	**1.3 mm**
Stripped Length	**6.0 mm**

Materials

Insulating Material	**PA**
Flammability Class	**UL94 V-0**
Temperature Range	**-30°C/+105°C**
Terminal Block	**CuZn**
Wire Guard	**Cu**
Color	**Green**

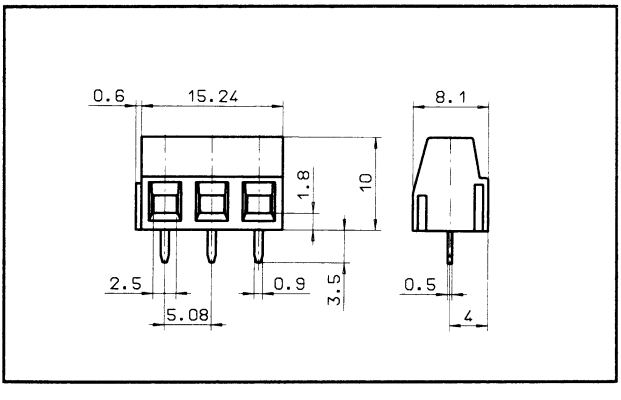

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

On-Shore Technology:

OSTOQ247151 USB-A1VSB60 ED-28DT ED790/8 EDSTL950/14 M12-04P-FD-PBS2 OSTTH030160 OSTTS02315A OSTTA034163 OSTTJ0411530 ED950/2 OSTT7032150 OSTVL18B151 OSTYC022150 EDSTLZ950/2 EDZ1110/2 EDZ350/3 OSTNR081200 OSTVI024152 OSTVI032152 ED555/16DS EDZ950/14 M12-05S-FA-PBS2 OSTOQ035450 EDSTLZ950/6 EDSTLZ990/8 EDZ1100/6 EDZ960/3 OSTVZ023050 OSTYK21103030