
Rocker Switch | **RB1-1B-DC-2-B**


SWITCH COMPONENTS

Mechanical Dimensions (mm)

Tolerances ±0.3 Unless Otherwise Specified

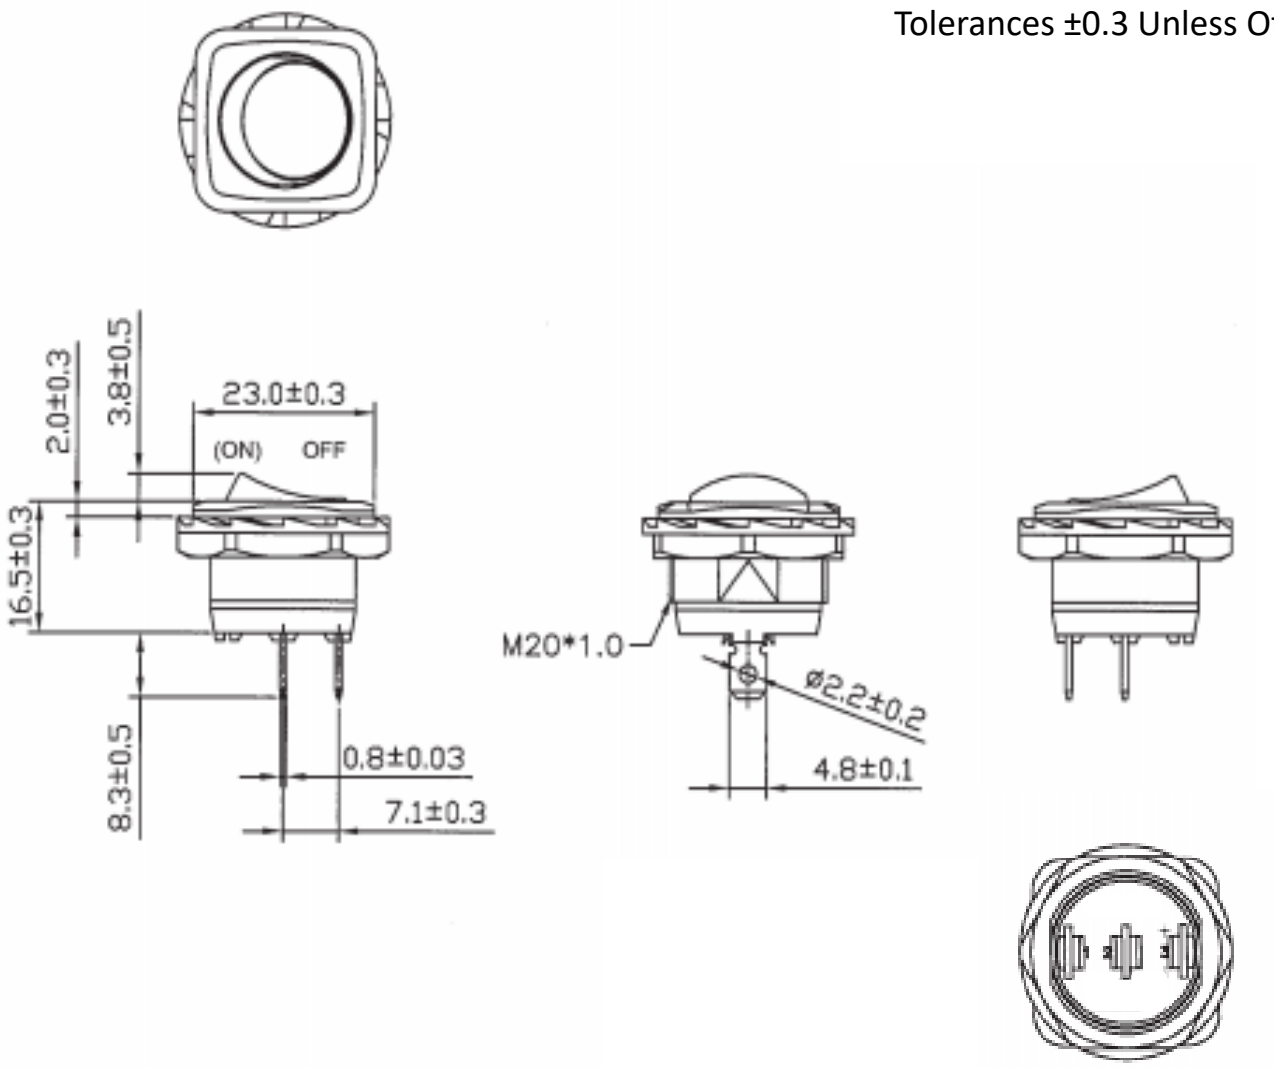

Mounting Hole

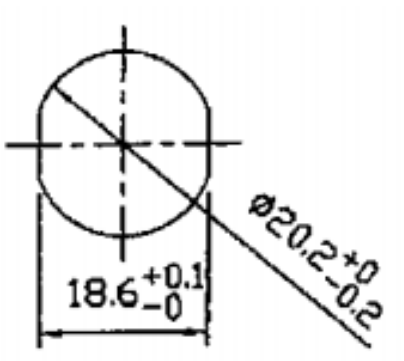

Thickness: 6mm max

Circuit Diagram

2P SPST OFF-(ON)



Electrical Specifications

Rating	20A 14V DC, 10A 28V DC
Contact Resistance	50m ohm Max.
Insulation Resistance	DC 500V 100M ohm Min.
Dielectric Strength	AC 1500V 1 minute
Operation Temperature	-25°C~85°C

Material Specifications

Frame	Black, Nylon 66+33%GF
Actuator	Black, Nylon 66

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Switch Components:

PB-1A-DC-2-RDL RD2-1A-DC-1-AL SB-1B-DC-3-R SC-B SRB1-1G-DC-1-NN SRD2-2F-DC-1-BNN TA2-1A-DC-5 TC6-P1-Z PB-1B-DC-2-RIL RC-1A-DC-1-AL SRD2-1G-DC-1-BNN TE3-1A-DC-1-AL TE6-1A-DC-1-UL PB-1A-DC-2-B RF3-1A-DC-2-GL TB1-2H-DC-6 RA4-2A-DC-2-AL RG3-1A-DC-1-B SRD2-2F-DC-1-RNN TA2-1G-DC-6-O SRD1-2A-DC-1-BGN SRA1-1A-DC-1-NN-2 TA1-1A-DC-4 WR1 SB-1B-DC-3-B TE1-1F-DC-1-PB PD-1E-DC-9-UL RF1-1A-DC-2-B-3 SRA1-2F-DC-1-NN SRC1-1B-DC-1-B