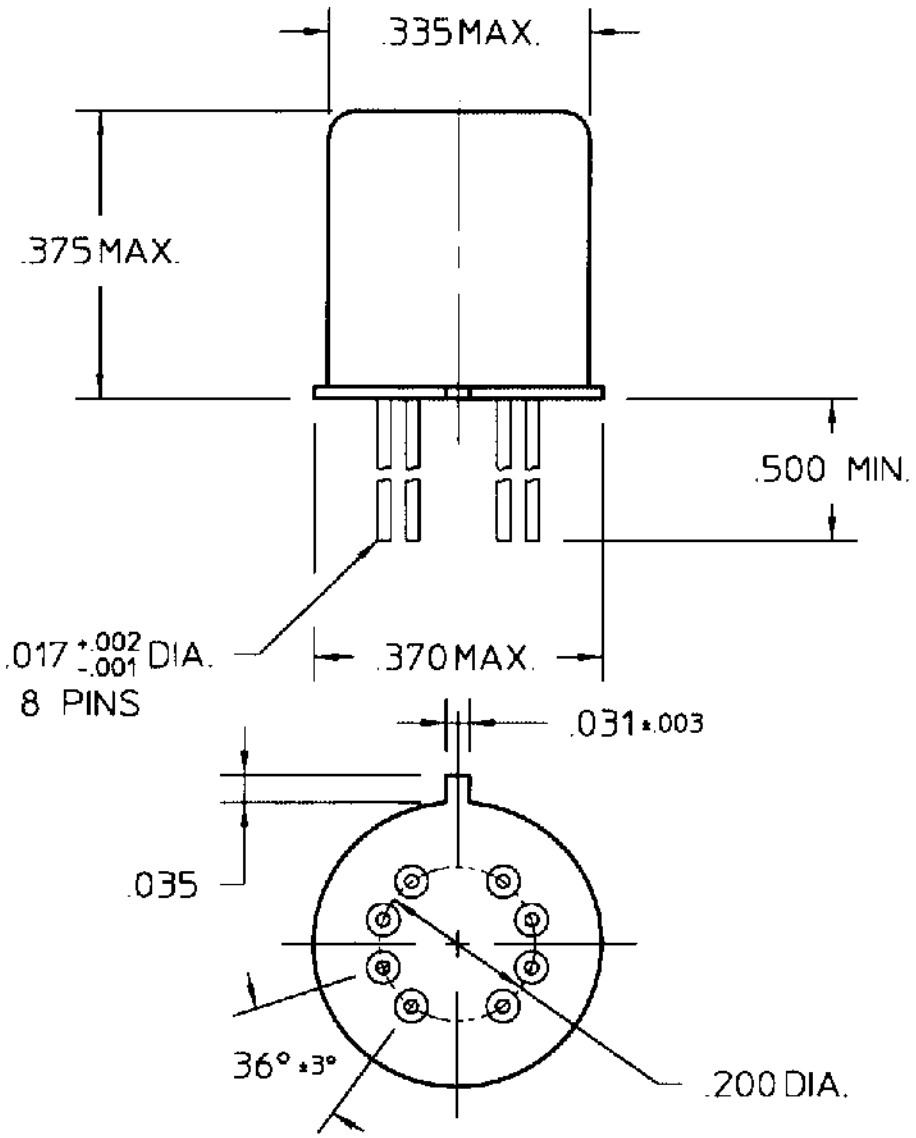



COIL: @ 25°C

| | |
|---|---|
| RESISTANCE | 100 OHMS ± 10% |
| NOMINAL VOLTAGE | 5.0 VDC |
| MUST OPERATE | 2.6 VDC |
| MUST RELEASE | 1.4 VDC MAX. 0.23 VDC MIN. |

ENVIRONMENT:


VIBRATION 10 CPS TO 3000 CPS @ 30 g's

SHOCK 75 g's 6 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE TIME 4 MS MAX
RELEASE TIME 2.0 MS MAX
CONTACT STABILIZATION TIME 2.0 MS MAX

# CUSTOMER DATA SHEET



CONTACT RATING: LOW LEVEL TO 1A
28 VDC RESISTIVE 100,000 OPERATIONS

DR. R.B. 12/5/96 | CK JERRY 12/5/96

COMMUNICATIONS INSTRUMENTS, INC.

CUST. QPL
CUST. NO M39016/11-033M

TYPE "JMS" RELAY

# JMSC-5XM

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TE Connectivity:

JMSC-5XM