


This document contains proprietary information and such informationmay not be disclosed to others for any purposes,
not used for sales/marketing/procurement purposes without written permission

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release	———	H. wei	19/03/17	19/03/17

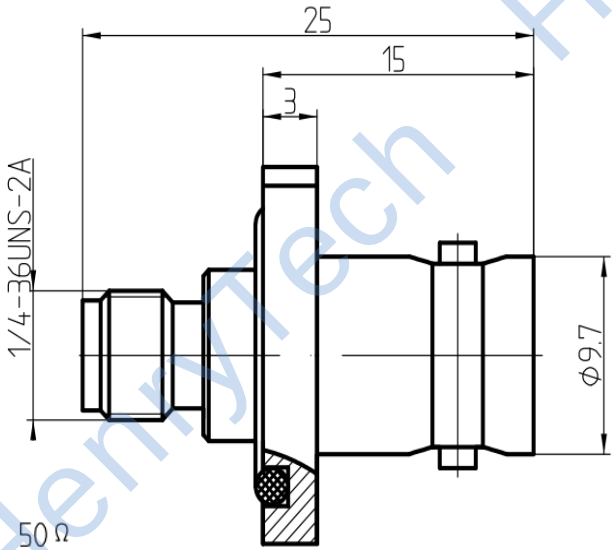

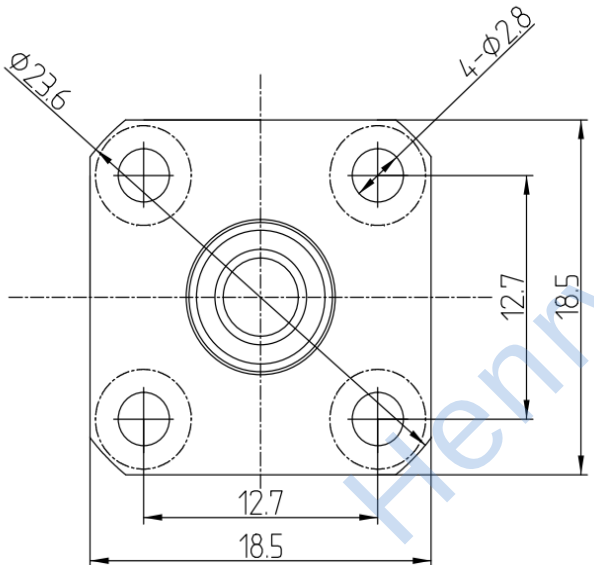

Recommended Mounting Hole

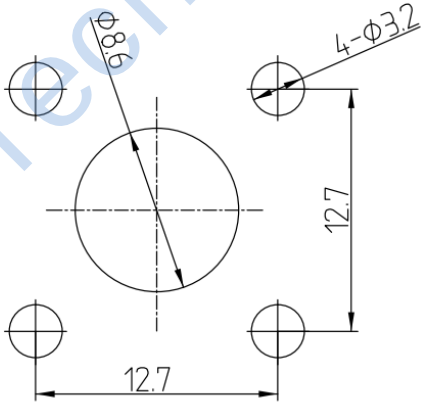

1 Electrical

1.1 Impedence	50Ω
1.2 Frequency	DC-4GHz
1.3 Dielectric withstanding voltage	100V(volts RMS)
1.4 Center contact resistance	≤ 3MΩ
1.5 Outer contact resistance	≤ 2MΩ
1.6 Insulation resistance:	≥5000MΩ

2 Environmental&Mechanical

2.1 Temperature range	-45℃~85℃
2.2 RoHs Compliant	
2.3 Durability	>500 cycles

3 Materials&plating

3.1 Body:	Brass, Nickel plated
3.2 Insulator:	Teflon
3,3 Contact Pin:	Phosphor Bronze, Gold plated

Notes:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN:	H. wei 19/03/17
ENGINEER:	L. yu 19/03/17
APPROVED:	W. yi 19/03/17

TOLERANCES UNLESS OTHERWISE SPEFICIED
X ±0.50
.X ±0.20
.XX ±0.10
ANGLES ±1°

TITLE:
RF Adaptor
BNC Female to SMA Female Flange Adaptor

HenryTech

DIMENSION IN MILLIMETERS (mm)

PART NO:	SIZE:	SCALE:	SHEET:	REV:
HL-BNC-SMA-KFKM	A4	N/A	1/1	A

HenryTech HenryTech HenryTech HenryTech HenryTech

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

HenryTech:

HX-SMA/SMP-JK HG-SCN-2-65+ HL-SMA-KHD4 HL-SSMA-KHD-1 HT-HFCN-2700+ H3-MABA-010551-CF1071 HL-MCX-KE-02 HL-N-KKC HL-SMB-K3DY HT-BFHKI-1572+ HT-SCA-4-10+ H3-TC1-1TG2+ H2SYDC-20-62HP+ H3-MABA-011085 HL-SMAMF-2-18-15dB H3-MABA-007871-CT1A40 HX-1.85-JJ HX-N-JK HL-SMA/SMB-KK HLCC2250G HT-HFCN-3800+ HT-LFCG-1700+ HT-LFCN-400+ HG-SCN-2-22+ HN-LP7-0.5-1.27(9.4-2.8) HT-LFCG-530+ HT-QCN-19+ H3-MAPD-008109-C30040 HN-DC2016-0.5(12-4.6)M HT-LFCN-3800+