
CUI DEVICES

SERIES: CP15-M | **DESCRIPTION:** PELTIER MODULE

FEATURES

- micro size (less than 10 x 10 mm)
- wide ΔT max
- Qmax of 3.5 W
- precise temperature control
- solid state construction

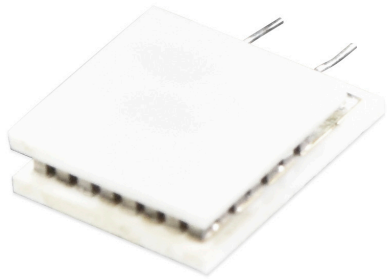

RoHS

MODEL	input voltage[1] max (Vdc)	input current[2] max (A)	internal resistance[3] typ (Ω±10%)	output Qmax[4] T_h=27°C (W)	output Qmax[4] T_h=50°C (W)	output ΔTmax[5] T_h=27°C (°C)	output ΔTmax[5] T_h=50°C (°C)
CP151188-271	3.8	1.5	1.93	3.2	3.5	70	77

Notes:
1. Maximum voltage at ΔT max and T_h=27°C
2. Maximum current to achieve ΔT max
3. Measured by AC 4-terminal method at 25°C
4. Maximum heat absorbed at cold side occurs at I_{max}, V_{max}, and ΔT=0°C
5. Maximum temperature difference occurs at I_{max}, V_{max}, and Q=0W (ΔT max measured in a vacuum at 1.3 Pa)


SPECIFICATIONS


parameter	conditions/description	min	typ	max	units
solder melting temperature	connection between thermoelectric pairs	235			°C
assembly compression				0.8	MPa
RoHS	yes				

MECHANICAL DRAWING

units: mm


	MATERIAL	PLATING
ceramic plate	96% AL_2O_3	
wire leads	Ø0.25-0.3 mm annealed copper	tin
sealer	no sealing	

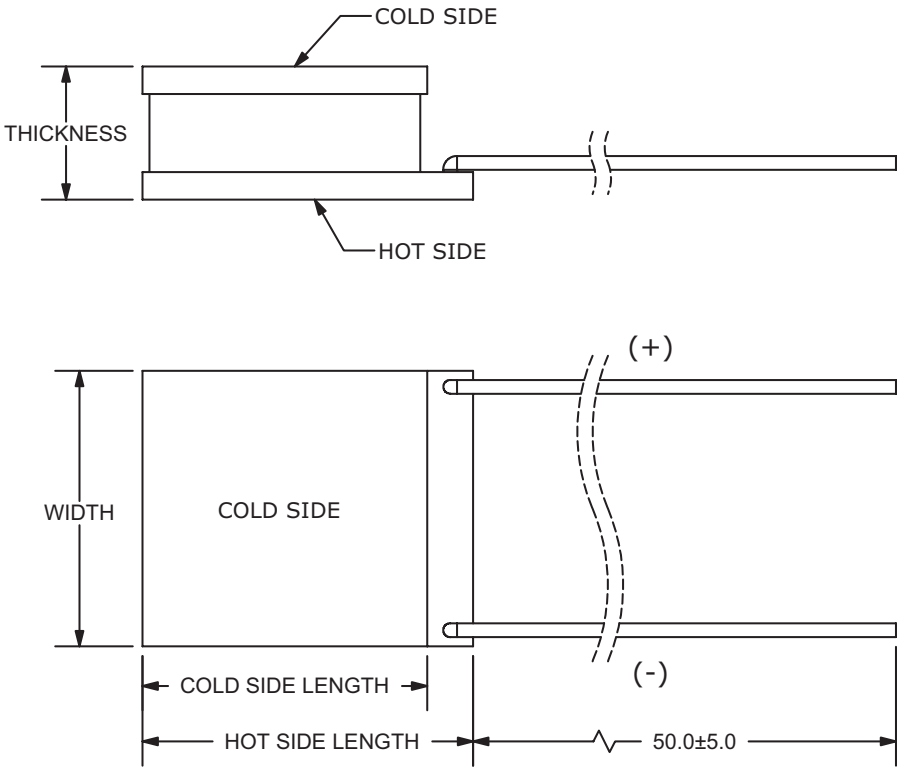

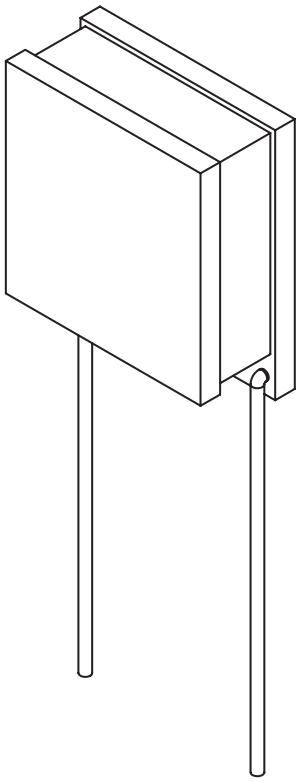


MODEL NO.	HOT SIDE LENGTH (mm)	COLD SIDE LENGTH (mm)	WIDTH (mm)	THICKNESS (mm)
CP151188-271	11.0 ±0.3	8.8 ±0.3	8.8 ±0.3	2.71 ±0.15

CP151188-271 PERFORMANCE (Th=27°C)

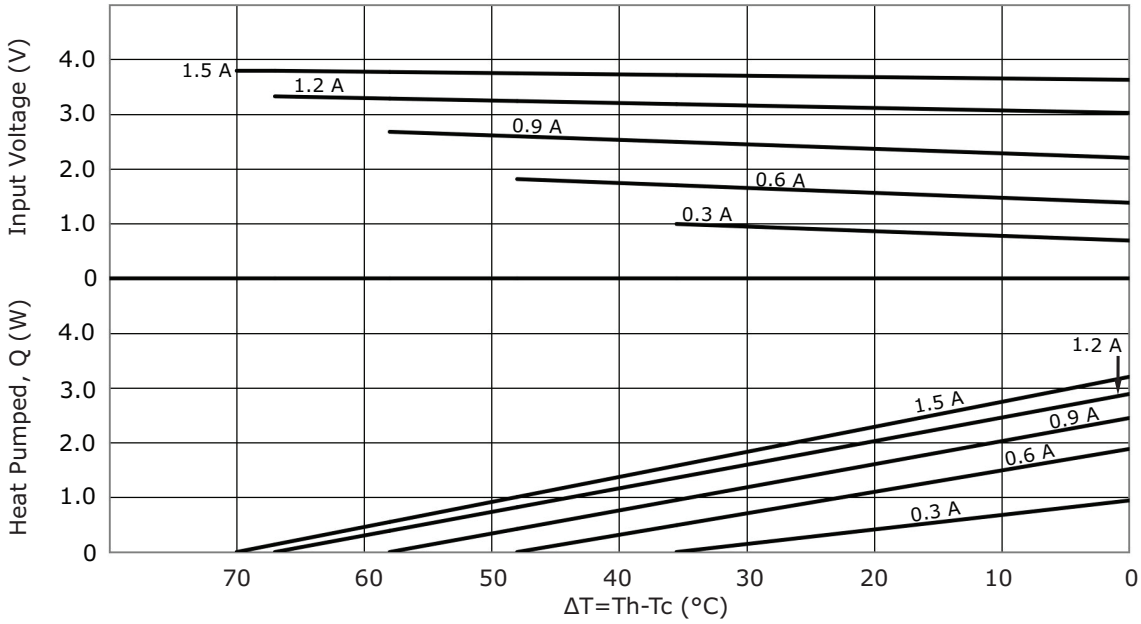

CP151188-271 PERFORMANCE (Th=50°C)

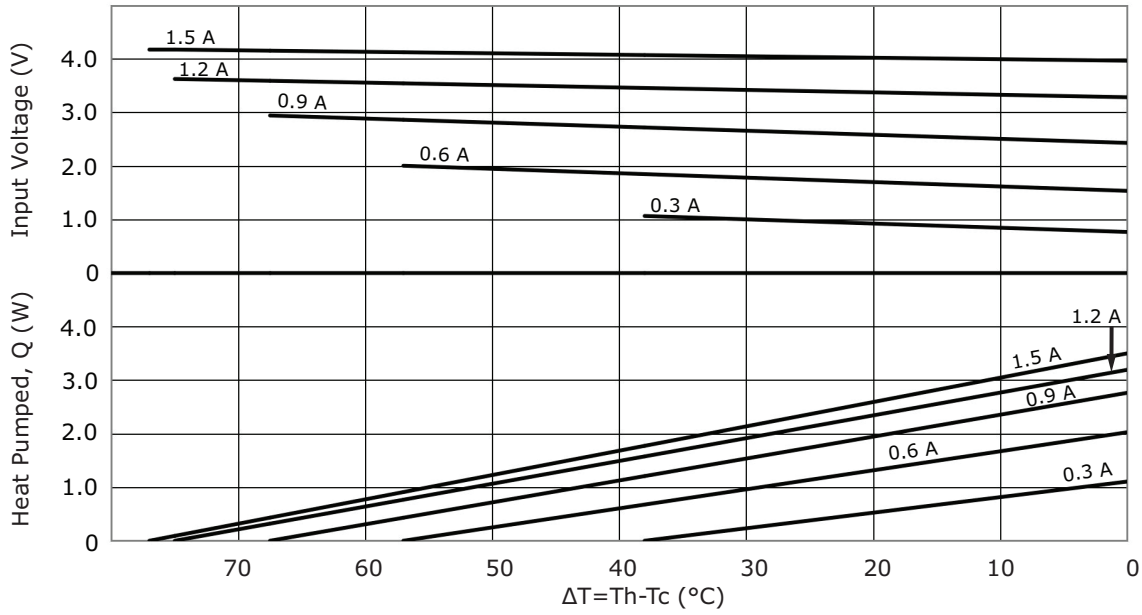

REVISION HISTORY

rev.	description	date
1.0	initial release	07/08/2020

The revision history provided is for informational purposes only and is believed to be accurate.

CUI DEVICES

CUI Devices offers a one (1) year limited warranty. Complete warranty information is listed on our website.

CUI Devices reserves the right to make changes to the product at any time without notice. Information provided by CUI Devices is believed to be accurate and reliable. However, no responsibility is assumed by CUI Devices for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

CUI Devices products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

cuidevices.com

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Same Sky:

PJ-058AH CBT-09427-SMT-TR CMC-5042PF-AC PJ-202AH SJ-2523-SMT-TR CMI-9653S-SMT-TR CMM-2718AT-42316-TR TB007-508-02BE CDM1222-12A-FW-F16-050-67 CFM-A238BF-270-651 DS01C-254-S-03BE PJ-047BH CMA-4544PF-W DS04-254-2-02BK-SMT TBL004V-508-02BE-2GY TBP01R1-508-14BE UJ32-C-H-G-L1-MSMT-TR CFM-2507CF-0140-313 CFM-6015V-239-292-20 HSE-B20350-NP PJ-067B PR4-5V-450-1A SJ1-3535N CFM-2510B-0130-275 CPI-1375IC-80T CPT-1117-83-SMT-TR SJ-43516-SMT-TR-PI TBP02P1-381-10BE CMP-5247TF-K CPM-2H