





SECTION A-A

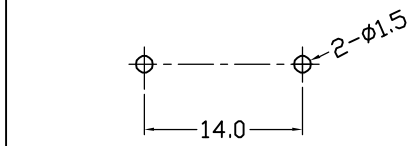


PCB LAYOUT

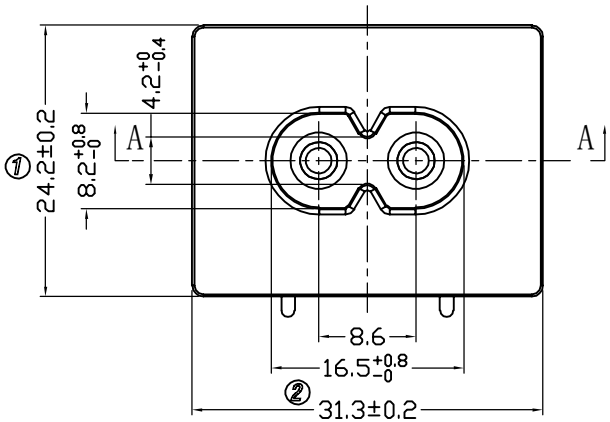


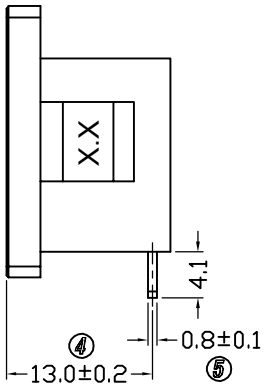

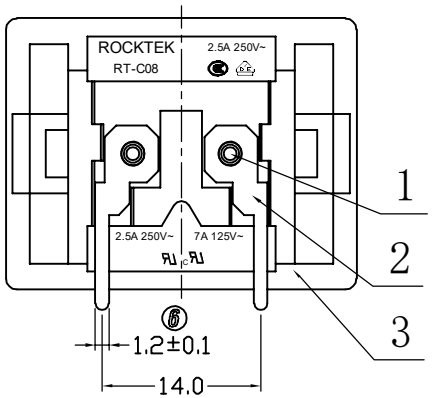

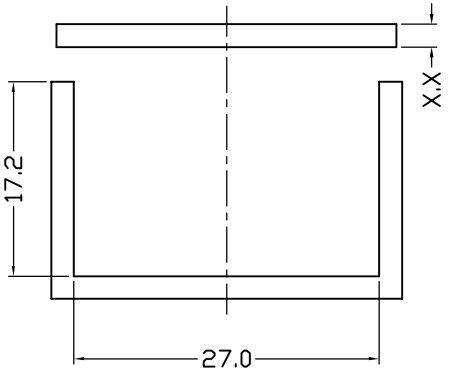

PCB CUT-OUT

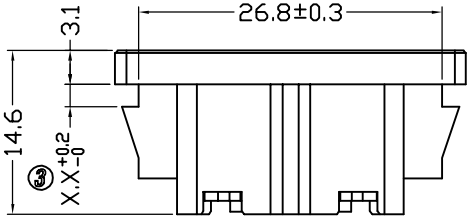

③

品　名	X.X
RT-C08-N08-BO	0.8mm
RT-C08-N10-BO	1.0mm
RT-C08-N15-BO	1.5mm
RT-C08-N20-BO	2.0mm

NOTES:
1. Rating: 2.5A 250VAC (CCC; VDE)
   2.5A 250VAC 7A 125VAC (UL;CUL)
2. Contact resistance: 50mΩ Max
3. Insulation resistance: >100MΩ (Min) 500VDC
4. Dielectric strength: >2000VAC 0.5mA 1 minutes

①

NO.	PART NAME	MATERIAL	Q'TY
3	BODY	PA66+30%GF UL94V-0 Black	1
2	1# terminal	C2680 1/2H Tin-plating	2
1	1# PIN	C3602 Ni-plating	2

NO	DESCRIPTION
5	
4	
3	
2	
1	修改为PA66+30%GF

NO	DESCRIPTION
10	
9	
8	
7	
6	

DIMENSIONAL TOLERANCES	
RANGE	TOLERANCE
X	±0.30
X.X	±0.20
X.XX	±0.10
ANGLES	±1°

APPROVED	CHECKED	DESIGN	DRAWN
			LMC 2022.03.01

LEGION ELECTRONIC & HARDWARE CO., LTD.

ALL SIZE ARE IN	MM
SCALE	NO
MAT'L	***
MATERIAL NO.	RT-C08-N**-BO
DRAWING NO.	WIF122033
REV.	A1