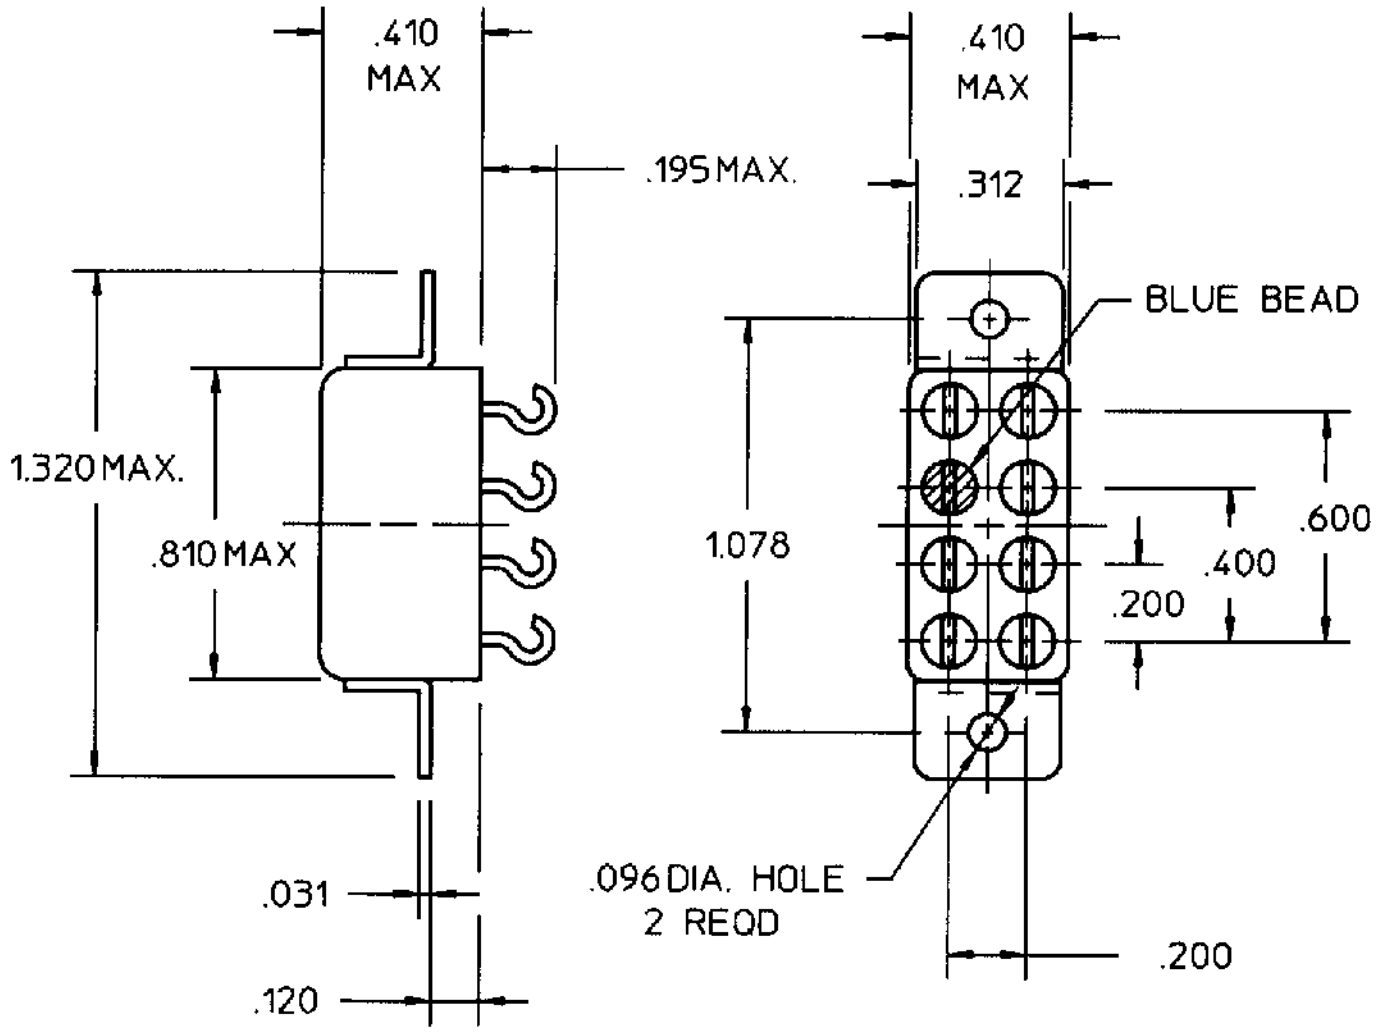


REV. 1 7/17/92

COIL:

RESISTANCE	700 OHMS ± 10%
NOMINAL VOLTAGE	26.5 VDC
MUST OPERATE	13.5 VDC
MUST RELEASE	1.5 VDC

ENVIRONMENT:


VIBRATION 10 CPS TO 2000 CPS @ 20 g's

SHOCK 100 g's 6 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES:

CUSTOMER DATA SHEET

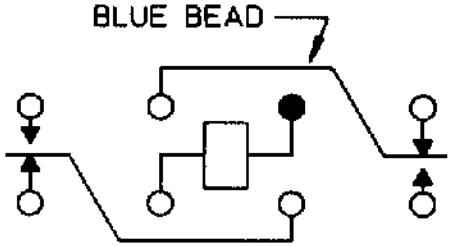

CONTACT RATING: 2A 30 VDC
RESISTIVE .75A 30 VDC INDUCTIVE
100,000 OPERATIONS

DR. R.B. 12/4/91 CK. 7/17/92

COMMUNICATIONS INSTRUMENTS, INC.

CUST. Hi-G
CUST. NO. 2K-1C-126

TYPE "HFW" RELAY

HFW1140S01

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

TE Connectivity:

2377783-2 3631B101LL ROX05SJ18R 1-794222-0 175977-2 141991-2 650075-000 SBCHE64R7K SMW73R0JT 1969656-1 CPF0402B37K4E1 1-962915-1 2834055-1 917696-1 SBCHE154R7K 2005330-1 936348-1 CRGCQ2010J3K3 RH73H2A40MKTN U5254-000005-030PA 2-292161-3 3-1393225-0 3430B2F51RTDF 1743455-2 2310537-1 2380312-2 MPT100C18RF TE50BR39J 1393431-1 1903112-2