



PRODUCT NUMBER	PLATING
10127397-00H2410LF	GCS
10127397-00H2410LF(GXT)	GXT
10127397-00H2410LF(AGT)	AGT

C

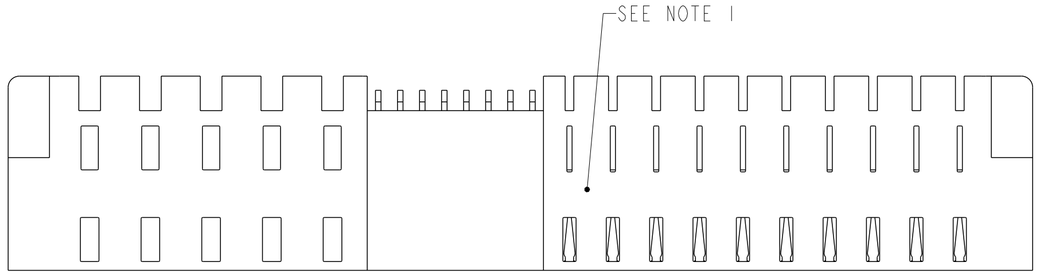

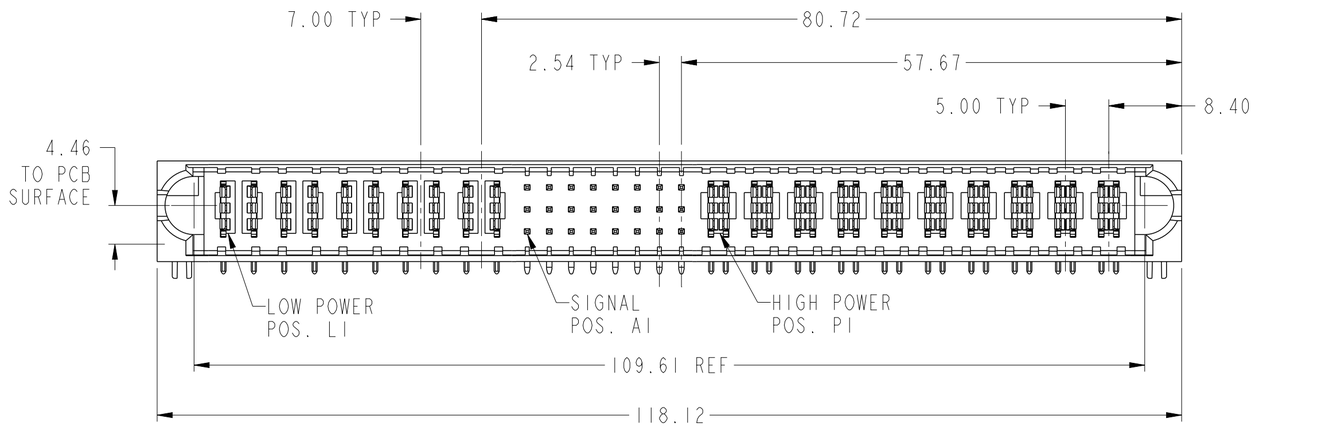

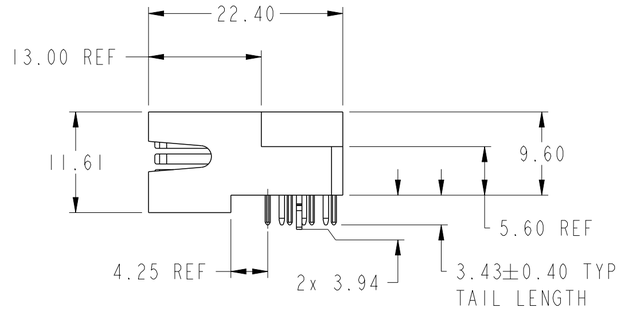

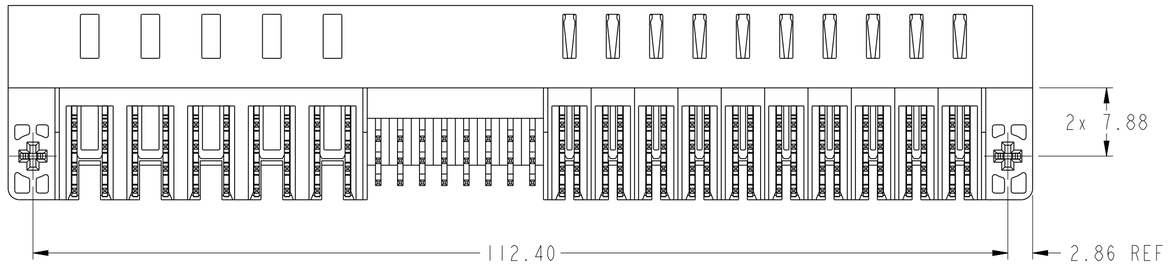

spec ref -				dr	T Brungard	2013/10/25	projection	mm
tolerance std - ASME Y14.5	TOLERANCES UNLESS OTHERWISE SPECIFIED			eng	Kaka Zhang	2016/08/04		
				chr	Fancy Zhang	2016/08/05		
				appr	Pei-Ming Zheng	2016/08/05	product family	PwrBlade ULTRA
surface - ASME Y14.5	linear	0.X	±0.5	Amphenol FCi	title	10LP+24S+10HP, SOLDER-TO-BOARD R/A PLUG, PwrBlade ULTRA		
		0.XX	±0.25					
		0.XXX	±0.130					
	angular	0°	±2°					

size	scale	rev
A2	2:1	C

ecn no ELX-DG-24605-1

rel level **Released**

dwg no 10127397-00H2410

cat. no. - | Product - Customer Special Drw | sheet 1 of 3

© 2016 AFCI


Creo File - REV E - 2016-02-12

PDS: Rev :C

STATUS: Released


Printed: Aug 05, 2016


PRODUCT NO.	ROWS
10127397-00H2410LF △C 10127397-00H2410LF(GXT) 10127397-00H2410LF(AGT)	C B A



△C

CODE	DESCRIPTION
RP	RIGHT POWER CONTACT
LP	LEFT POWER CONTACT
R	SIGNAL CONTACT
S	SIGNAL CONTACT
T	SIGNAL CONTACT
HA	HOLD DOWN

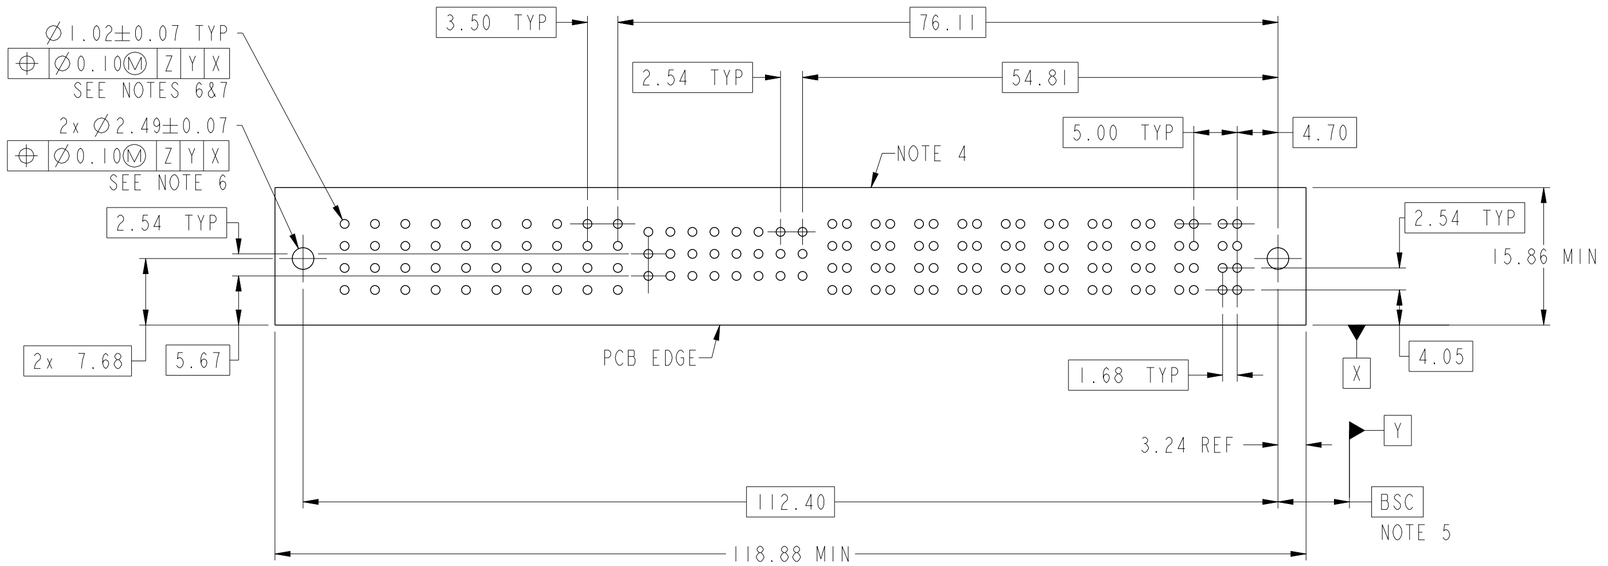



spec ref -				dr	T Brungard	2013/10/25	projection	mm	size A2 / scale 2:1
tolerance std - ASME Y14.5	TOLERANCES UNLESS OTHERWISE SPECIFIED			eng	Kaka Zhang	2016/08/04			
				chr	Fancy Zhang	2016/08/05			ecn no ELX-DG-24605-1
				appr	Pei-Ming Zheng	2016/08/05	product family PwrBlade ULTRA		rel level Released
surface - ASME Y14.5	linear	0.X	±0.5	Amphenol FCi	title	10LP+24S+10HP, SOLDER-TO-BOARD R/A PLUG, PwrBlade ULTRA	dwg no	10127397-00H2410	rev C
		0.XX	±0.25						
		0.XXX	±0.130						
	angular	0°	±2°		cat. no. -	Product - Customer Special Drw	sheet 2 of 3		

© 2016 AFCI

PRODUCT NUMBER	PLATING
10127397-00H2410LF	GCS
10127397-00H2410LF(GXT)	GXT
10127397-00H2410LF(AGT)	AGT

C

NOTES:

1. "FCI", PART NUMBER AND DATE CODE TO BE MARKED ON THIS SURFACE.
   THE P/N CAN BE OMITTED IF THERE IS NOT ENOUGH SPACE ON THIS SURFACE.

2. MATERIALS:
   HOUSING: GLASS FILLED WITH HIGH TEMP POLYAMIDE, UL94V-0.
   POWER CONTACTS: COPPER ALLOY.
   SIGNAL CONTACTS: COPPER ALLOY.
   HOLD DOWN: COPPER ALLOY.

3. PLATING SPECIFICATION: FCI 10135186.

4. DENOTES CONNECTOR KEEP OUT ZONE.

5. DATUM AND BASIC DIMENSION ARE ESTABLISHED BY CUSTOMER.

6. ALL HOLE DIAMETERS ARE FINISHED HOLE SIZES.

7. 1.150±0.025mm DRILLED HOLE PLATED WITH 7.62µm MIN Sn OVER
   25.4µm-76.2µm Cu PLATING TO ACHIEVE A 1.02±0.07mm FINISHED HOLE.

8. PRODUCT SPECIFICATION: FCI GS-12-1176.
   APPLICATION SPECIFICATION: FCI GS-20-0389.
   PRODUCT PACKAGE SPECIFICATION: FCI GS-14-2354.

9. A △ SYMBOL WILL BE NEXT TO ANY DIMENSION, VIEW, OR NOTE WHICH HAS
   BEEN MODIFIED WITH THE CURRENT DRAWING REVISION.

Amphenol FCi

© 2016 AFCI

spec ref -			dr	T Brungard	2013/10/25	projection	mm
tolerance std - ASME Y14.5	TOLERANCES UNLESS OTHERWISE SPECIFIED		eng	Kaka Zhang	2016/08/04		
			chr	Fancy Zhang	2016/08/05		
			appr	Pei-Ming Zheng	2016/08/05		
surface - ASME Y14.5	linear	0.X	±0.5	Amphenol FCi	title	10LP+24S+10HP, SOLDER-TO-BOARD R/A PLUG, PwrBlade ULTRA	dwg no 10127397-00H2410 rev C
		0.XX	±0.25				
		0.XXX	±0.130				
	angular	0°	±2°		cat. no. -	Product - Customer Special Drw	sheet 3 of 3

size	scale
A2	2:1

ecn no ELX-DG-24605-1

rel level **Released**

Creo File - REV E - 2016-02-12

PDS: Rev :C STATUS: Released Printed: Aug 05, 2016

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Amphenol:

70430-164LF 86130202123355E1LF DEM09P032N 54202-G0805CLF 69192-408HLF 70218-1116LF 86093488314745V1LF 86093968191755E3LF 95157-140LF CD15S13E4RV09LF 68001-108HLF 76384-316LF 65781-158 68002116HLF 91614-403ALF D15P13A6RV12LF DCMF37P LD25S33E4GV00LF RJSBE5080C2 68000-236HLF 70234-112LF 86093968813H45V1LF RJE061661210 DAPO15S365TLF 67996-204HLF 68001-200HLF 863013A 54202-S08-07LF 86093967896755LF LD15P33E4GV00LF