

DIMENSIONS mm (inches)

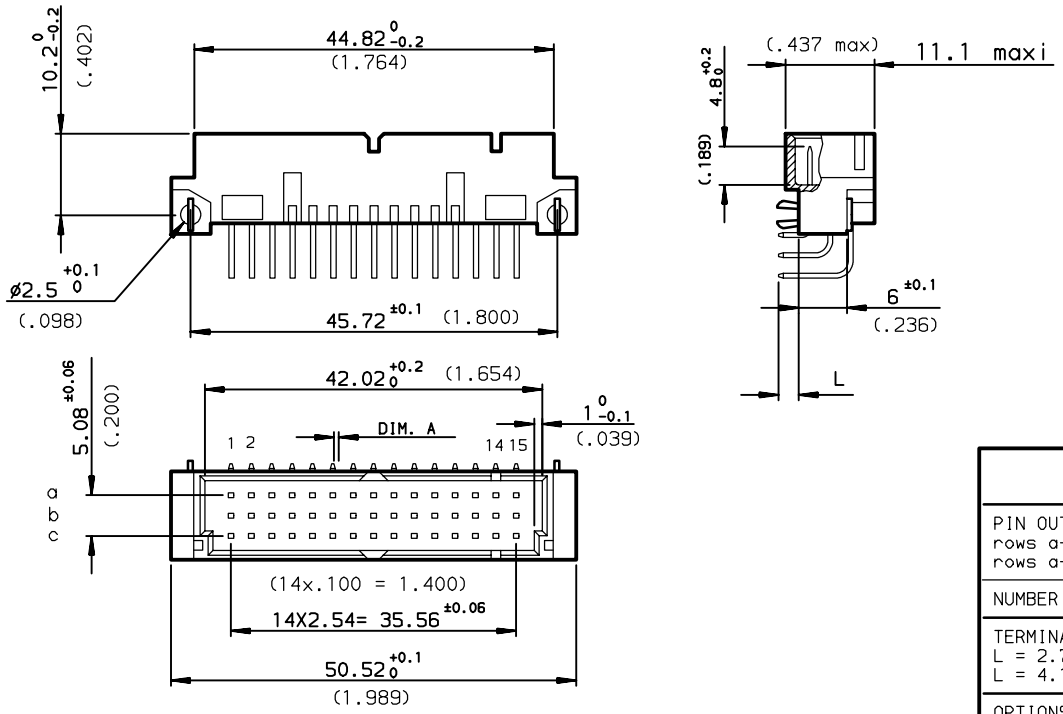

PCB DRILLING

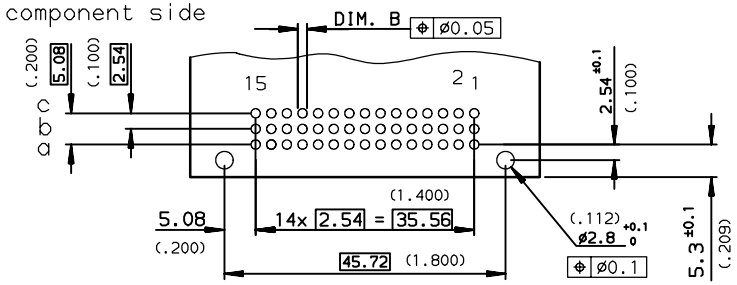

PART NUMBER	8609			77				5	
PIN OUT									
rows a-b-c			3		45				
rows a-c			4		30				
NUMBER OF CONTACTS									
TERMINATION									
L = 2.75 ±0.15 (.108)	A = ø0.6 0 -0.08		B =			13			
L = 4.15 ±0.15 (.163)	A = 0.6X0.6		B = ø1±0.1			23			
OPTIONS									
no option							7		
with harpoons	for PCB thickness 1.6 mm						H		
PERFORMANCE CLASS									
DIN 41612 class 3								4	
DIN 41612 class 2								5	
DIN 41612 class 1								6	
TERMINATION TYPE									
TIN LEAD									000E1
LEAD FREE									E1LF

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:

SEE DRAWING C-8609-0000A

European Views

rev	ecn no	dr	date
B	-	-	1999/02/10
C	LS05-001	JTA	2005/03/01
D	LS06-0095	LGO	2006/06/22
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-

www.fciconnect.com

surface ISO 1302 | tolerance std ISO 406 ISO 1101

TOLERANCES UNLESS OTHERWISE SPECIFIED

projection | mm

Dr	ROUILLARD	1997/10/30
Eng	TARON	1997/10/30
Chr	LEGARE	1997/10/30
Appr	LEGARE	1997/10/30

ANGULAR ±2° | LINEAR 0.X ±0.1 | 0.XX ±0.1 | 0.XXX ±0.1

size A3 | Scale 1.5

ECN LS06-0095

Product family DIN 8609 | Spec ref -

title: RIGHT ANGLE MALE - 45 CONTACTS
SOLDER TO BOARD

dwg no C-8609-0657 | Rev. D

catalog no -

CUSTOMER | sheet 1 of 1

Copyright FCI.

REV F - 2006-04-17

PDM: Rev:D STATUS: Released Printed: May 14, 2011

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Amphenol:

MRDAH03M15000 97-3102A-10SL-3P(958) 97-4106A-18-12P D38999/20WE6PN M85049/79-09W02 PTIH-8-4P 122373 AD-NPMCXJ-2 M39012/56-3028 M85049/1819W03 M85049/7915W03 1115-6088 112589 RJHSE7367 97-14S-6P CF-198136-000 GTC08-32-17SX-025-LC 62GB56TG1404PN C016 20G003 200 12 M85049/52S18W EP-8-11P L77SDC37SVFC309 MS3102A-14S-2SY MUSB2K15015BP RTS010N4S03 SLPIPB70BSB2EH 034-1046 9760-24P GTS08-32-17SY-025 MA1LAE1200-KIT