
DIMENSIONS mm (inches)

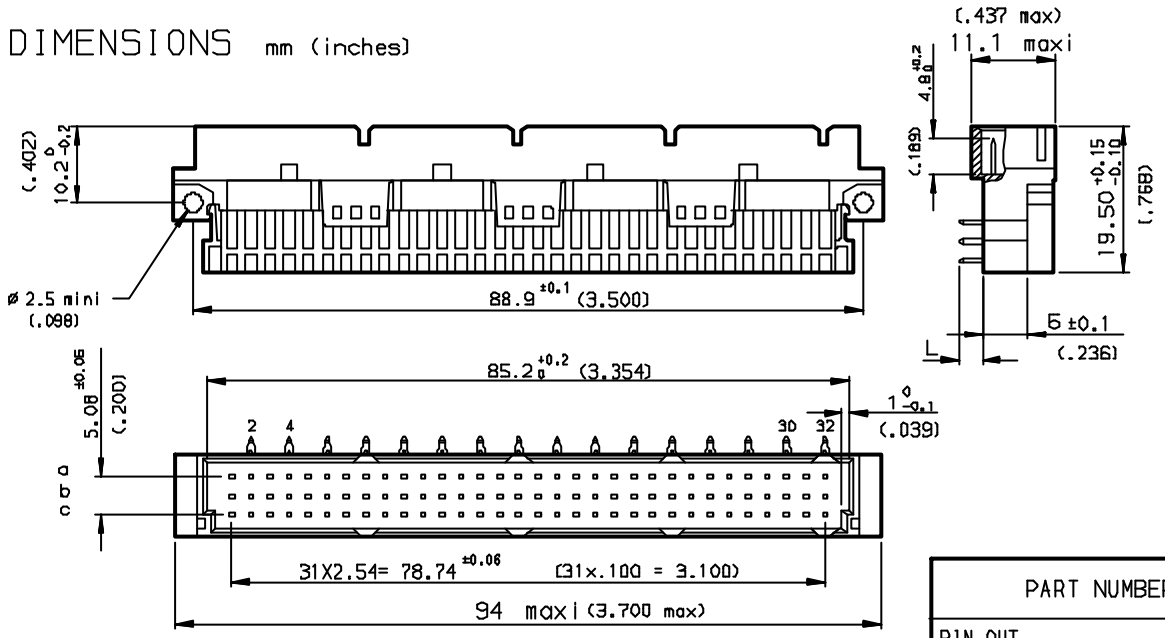

PART NUMBER	8609	□	□	71	□	7	□	8	□

PIN OUT
rows a-b-c ——— 3 — 48
rows a-c ——— 4 — 32

NUMBER OF CONTACTS

TERMINATION
L = 2.80 ±0.20 (.110) ——— short post ——— 94


PERFORMANCE CLASS
DIN 41612 class 3 ——— 4
DIN 41612 class 2 ——— 5
DIN 41612 class 1 ——— 6

TERMINATION TYPE
TIN LEAD ——— 000E1
LEAD FREE ——— E1LF


GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:
SEE DRAWING C-8609-0000C

METHOD OF INSERTION
ON THE PCB = FLAT ROCK


ATTENTION
Minimum gap: 1mm (.039)



Recommended accessory :
Loaded connectors with less than 64 cts require fixings with self-winding screws
part number : 4514327



PCB DRILLING

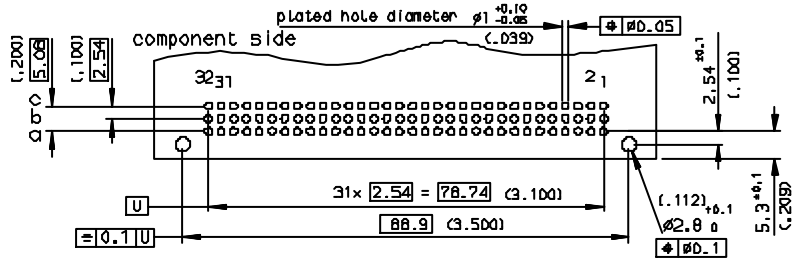

rev	eco no	dr	date
C	-	ROU	2001/09/06
D	L505-004	JTA	2005/02/11
E	L506-0095	LGO	2006/06/22
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-

European Views

www.fciconnect.com

surface ISO 1302 ✓ tolerance std ISO 406 ISO 1101
TOLERANCES UNLESS OTHERWISE SPECIFIED
projection mm

Dr	ROUILLARD	1997/10/28	ANGULAR	LINEAR	0.X	±0.1
Eng	TARON	1997/10/28			0.XX	±0.1
Chr	LEGARE	1997/10/28	±1X° ±2'		0.XXX	±0.1
Appr	LEGARE	1997/10/28	Product family		DIN 8609	

size A3 scale 1.5
ECN L506-0095
Spec ref -

FCI
title: RIGHT ANGLE MALE - STYLE C PRESS FIT
dwg no C-8609-0632
Rev. E
catalog no -
CUSTOMER
sheet 1 of 1

REV F - 2006-04-17

Copyright FCI.

PDM: Rev:E STATUS: Released Printed: May 14, 2011

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Amphenol:

MRDAH03M15000 EP-8-11P MA1LAE1200-KIT PTIH-8-4P RJHSE7367 RTS010N4S03 SLPIPB70BSB2EH 97-3102A-10SL-3P(958) D38999/20WE6PN GTC08-32-17SX-025-LC L77SDC37SVFC309 M39012/56-3028 MUSB2K15015BP 112589 C016 20G003 200 12 MS3102A-14S-2SY AD-NPMCXJ-2 M85049/52S18W M85049/79-09W02 122373 97-4106A-18-12P 97-14S-6P 9760-24P GTS08-32-17SY-025 M85049/1819W03 M85049/7915W03 034-1046 1115-6088 62GB56TG1404PN CF-198136-000