
Rocker Switch | **RA1-1A-DC-2-UL**


SWITCH COMPONENTS

Mechanical Dimensions (mm)

Tolerances ±0.3 Unless Otherwise Specified

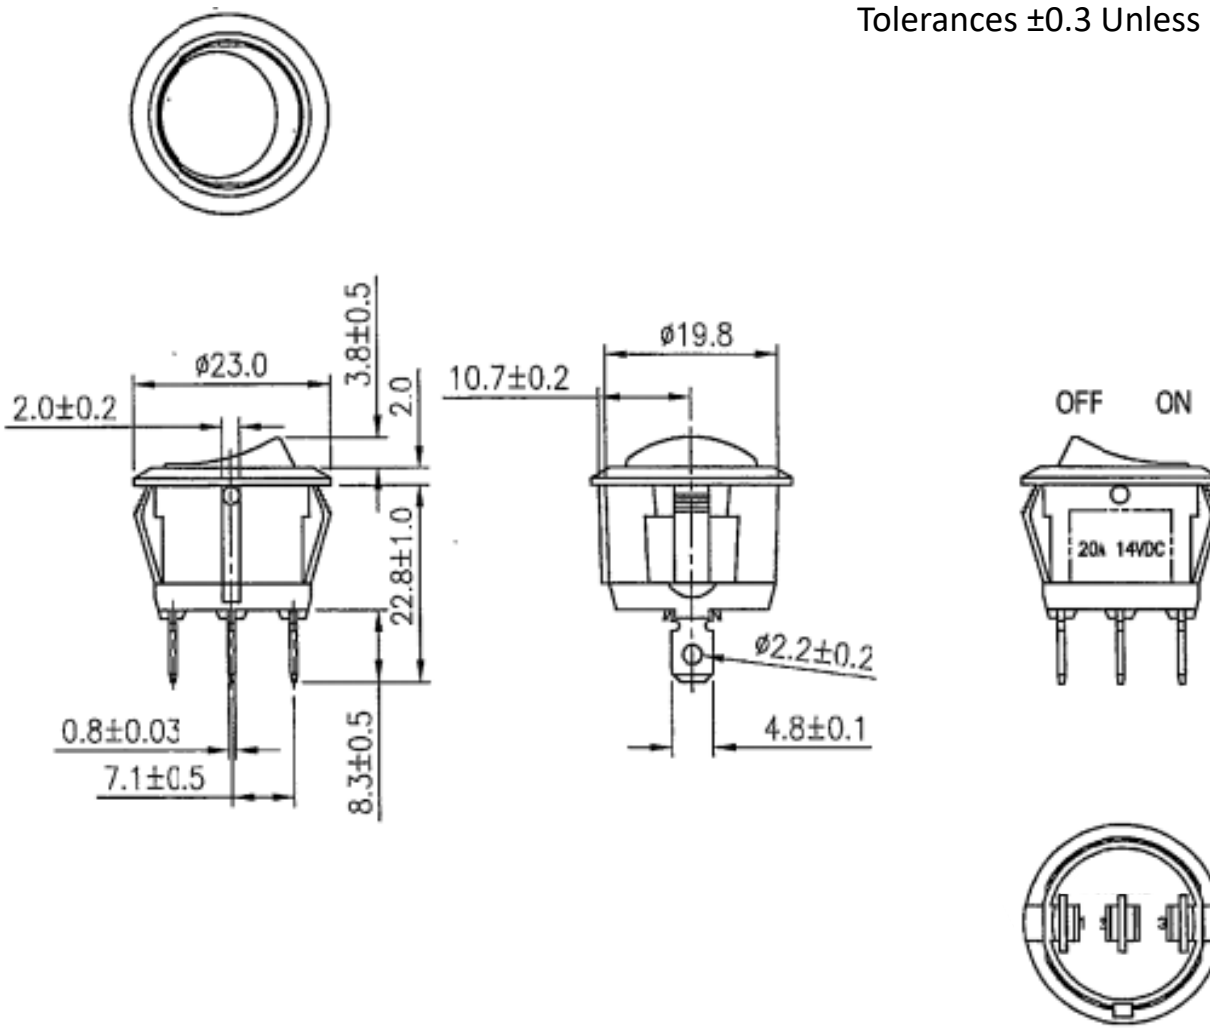


Mounting Hole

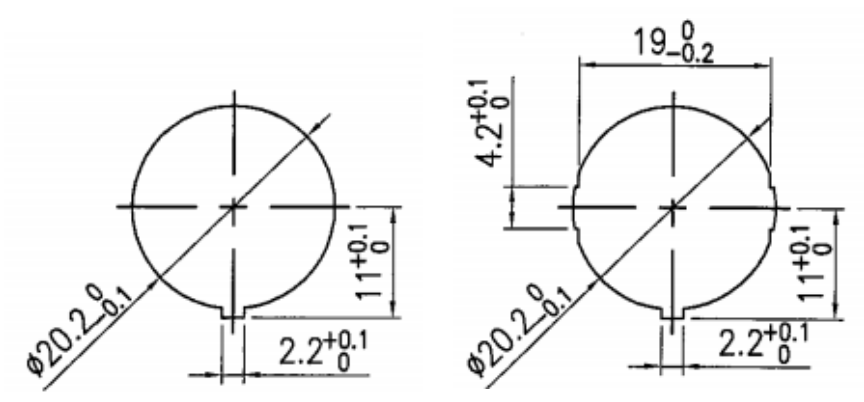

Thickness: 2.0~3.0 Thickness: 0.7~3.0

Circuit Diagram

3P SPST OFF-ON (LED-D)

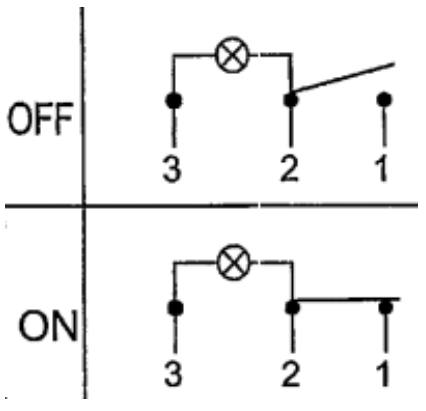

Electrical Specifications

Rating	20A 14V DC
Contact Resistance	50m ohm Max.
Insulation Resistance	DC 500V 100M ohm Min.
Dielectric Strength	AC 1500V 1 minute
Operation Temperature	-25°C~85°C

Material Specifications

Frame	Black, Nylon 66 (94-V2)
Actuator	Blue clear, PC
LED	Blue (Dependent)
Terminals	Silver plated, Copper alloy

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Switch Components:

RF3-1A-DC-2-GL RG3-1A-DC-1-B PB-1A-DC-2-B RC-1A-DC-1-AL SRA1-2F-DC-1-NN TB1-2H-DC-6 PD-1E-DC-9-UL SC-B SRD1-2A-DC-1-BGN TA1-1A-DC-4 RD2-1A-DC-1-AL TE6-1A-DC-1-UL RA4-2A-DC-2-AL SB-1B-DC-3-R SRD2-1G-DC-1-BNN TE1-1F-DC-1-PB WR1 TE3-1A-DC-1-AL RF1-1A-DC-2-B-3 SRA1-1A-DC-1-NN-2 SRB1-1G-DC-1-NN SRC1-1B-DC-1-B TA2-1G-DC-6-O TC6-P1-Z SRD2-2F-DC-1-BNN TA2-1A-DC-5 PB-1A-DC-2-RDL PB-1B-DC-2-RIL SB-1B-DC-3-B SRD2-2F-DC-1-RNN