

REV.	DATE	DESCRIPTION
NC	06/07/99	INITIAL RELEASE
A	07/31/05	UPDATE DRAWING FORMAT

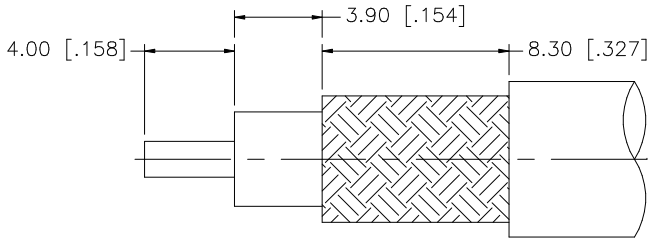

RECOMMENDED
CABLE STRIPPING DIM'S

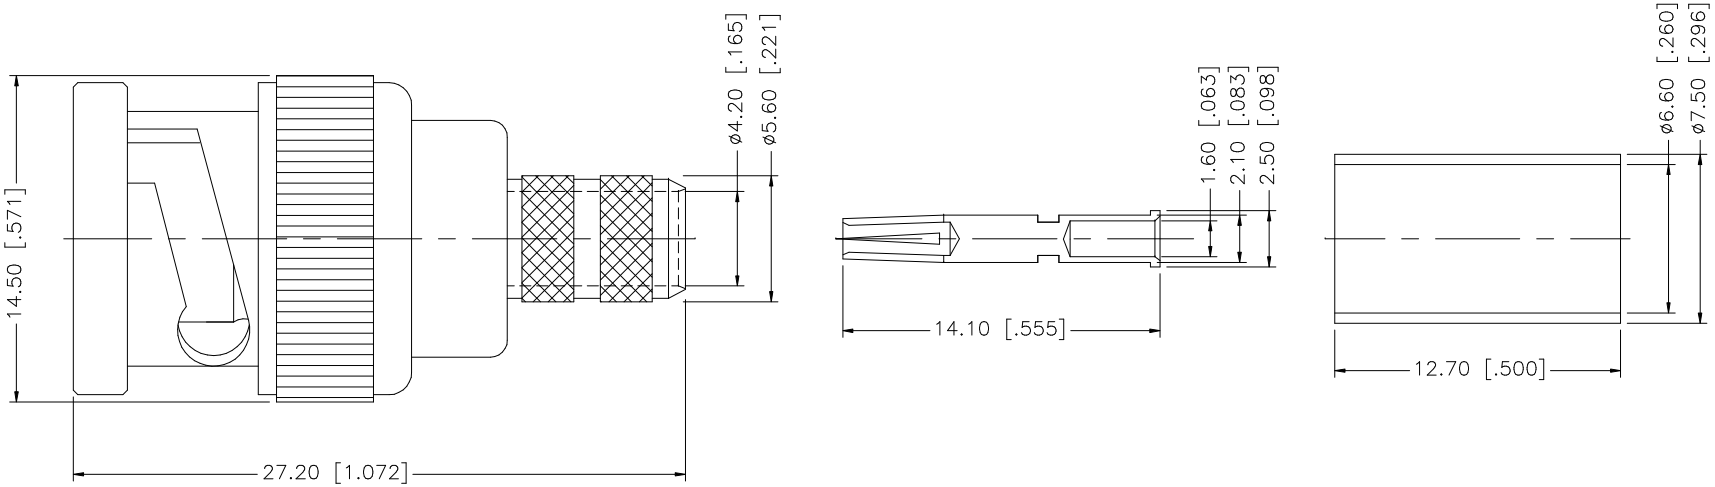

	DESCRIPTION	MATERIAL	FINISH	QTY
8				
7				
6				
5				
4	FERRULE	COPPER	NICKEL	1
3	CONTACT PIN	PHOS. BRONZE	GOLD	1
2	INSULATOR	TEFLON	NATURAL	1
1	BODY	BRASS	NICKEL	1

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [ ] ARE IN INCHES AND FOR CUSTOMER REFERANCE ONLY.

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:
0.5 – 8mm ± 0.20mm
8 – 30mm ± 0.40mm
30 – 120mm ± 0.50mm

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:
.020 – .315 = ± 0.007"
.315 – 1.180 = ± 0.015"
1.180 – 4.724 = ± 0.020"

DO NOT SCALE DRAWING

APPROVALS	DATE
DRAWN G.R.S.	07/31/05
CHECKED	
ISSUED	
SHEET 1 OF 1	

CAD FILE C:/112/112533RP.DWG

Amphenol Connex

PART DESCRIPTION
BNC REVERSE POLARITY CRIMP PLUG
(FOR LMR 240, 8X, B 7808A CABLE)

PART NO. 112533RP

DWG. NO.	REV.	SIZE	SCALE
112533RP.DWG	A	A	NA

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Amphenol:

68000-236HLF 68002116HLF 70430-164LF RJSBE5080C2 67996-204HLF 68001-108HLF DCMF37P
LD25S33E4GV00LF 69192-408HLF 70218-1116LF 70234-112LF 91614-403ALF LD15P33E4GV00LF
CD15S13E4RV09LF DAPO15S365TLF DEM09P032N 54202-G0805CLF 54202-S08-07LF 76384-316LF
86093968191755E3LF 86093968813H45V1LF 68001-200HLF 86093967896755LF 86130202123355E1LF
95157-140LF D15P13A6RV12LF RJE061661210 86093488314745V1LF 65781-158 863013A