
Slotted Optical Switch

OPB830 and OPB840 (L and W)

Features:

- 0.125” (3.18 mm) wide slot
- Choice of electrical output parameters
- Choice of aperture
- Choice of opaque or IR transmissive shell material
- Side mount configuration
- Choice of lead spacing (L Series)
- 24” [610 mm] 26 AWG wire leads (W Series)



L Package



W Package

Description:

OPB830 and OPB840 series provide the design engineer with the flexibility of a custom device from a standard product line. The L Series offers a choice of PCBoard mount lead spacing, while the W Series offers 24” (610mm) 26AWG wire leads.

Building from a standard housing that utilizes a .375” (9.5 mm) wide slot, a user can specify the electrical output parameters, choice of aperture, discrete shell material, side mount configuration, and a choice of lead spacing (for the L Series) or 24” [610 mm] UL approved 26 AWG wire leads (W Series).

Housings are made from an opaque grade of injection-molded plastic that minimizes the assembly’s sensitivity to visible and near-infrared ambient radiation. Discrete shells (exposed on the parallel faces inside the device throat) are made of either IR transmissive plastic (for applications where aperture contamination may occur) or of opaque plastic with aperture openings (for maximum protection against ambient light).

Switching of the phototransistor occurs whenever an opaque object passes through the slot and interrupts the beam.

Applications:

- Non-contact interruptive object sensing
- Assembly line automation
- Machine automation
- Equipment security
- Machine safety

General Note
TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics’ own data and is considered accurate at time of going to print.

© TT electronics plc

TT Electronics | OPTEK Technology
2900 E. Plano Pkwy, Plano, TX 75074 | Ph: +1 972 323 2200
www.ttelectronics.com | sensors@ttelectronics.com

Part Number Guide — OPB8XX

OPB 8 X X L X X

Optek Assembly

Phototransistor Output Family

Discrete Shell Material:
3 — Side mount IR transmissive Plastic discrete shell
4 — Side mount opaque Plastic discrete shell

Electrical Specification Variations:
0 = Electrical Parameter A - (0.320” lead spacing)
1 = Electrical Parameter B - (0.320” lead spacing)
2 = Electrical Parameter C - (0.320” lead spacing)
5 = Electrical Parameter A - (0.220” lead spacing)
6 = Electrical Parameter B - (0.220” lead spacing)
7 = Electrical Parameter C - (0.220” lead spacing)

Notes:
- Assemblies with dual 0.010” apertures are currently available with electrical parameter “A” only.

Sensor Aperture:
1 — 0.010” (0.25 mm)
5 — 0.050” (1.27 mm)

Emitter Aperture:
1 — 0.010” (0.25 mm)
5 — 0.050” (1.27 mm)

Mounting configurations:
L — Solder lead termination

Part Number Guide — OPB8XX

OPB 8 X X W X X Z

Optek Assembly

Phototransistor Output Family

Discrete Shell Material:
3 — Side mount IR transmissive Plastic discrete shell
4 — Side mount opaque Plastic discrete shell

Electrical Specification Variations:
0 = Electrical Parameter A
1 = Electrical Parameter B
2 = Electrical Parameter C

Notes:
- Assemblies with dual 0.010” apertures are currently available with electrical parameter “A” only.

Sensor Aperture:
1 — 0.010” (0.25 mm)
5 — 0.050” (1.27 mm)

Emitter Aperture:
1 — 0.010” (0.25 mm)
5 — 0.050” (1.27 mm)

Mounting configurations:
W — Wire termination
- Parts ending with “Z” meet RoHS requirements
- Wires = 26 AWG—24” Long

General Note
TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics’ own data and is considered accurate at time of going to print.

© TT electronics plc

TT Electronics | OPTEK Technology
2900 E. Plano Pkwy, Plano, TX 75074 | Ph: +1 972 323 2200
www.ttelectronics.com | sensors@ttelectronics.com

Electrical Specifications

Absolute Maximum Ratings (T_A=25°C unless otherwise noted)

Storage and Operating Temperature L Series[1] W Series[1]	 -40° C to +85°C -40° C to +80°C
Lead Soldering Temperature [1/16 inch (1.6mm) from the case for 5 sec. with soldering iron][2]	260°C

Input Diode

Forward DC Current	50 mA
Peak Forward Current (1 µs pulse width, 300 pps)	1 A
Reverse DC Voltage	2 V
Power Dissipation[1]	100 mW

Output Phototransistor

Collector-Emitter Voltage	30 V
Emitter-Collector Voltage	5 V
Collector DC Current	30 mA
Power Dissipation[1]	100 mW

Electrical Characteristics (T_A = 25°C unless otherwise noted)

SYMBOL	PARAMETER	MIN	TYP	MAX	UNITS	TEST CONDITIONS
Input Diode LED (See OP240 for additional information—for reference only)						
V_F	Forward Voltage	-	-	1.7	V	I_F = 20 mA
I_R	Reverse Current	-	-	100	µA	V_R = 2 V
Output Transistor (See OP550 for additional information—for reference only)						
$V_{(BR)CEO}$	Collector-Emitter Breakdown Voltage	30	-	-	V	I_C = 1 mA
$V_{(BR)ECO}$	Emitter-Collector Breakdown Voltage	5	-	-	V	I_E = 100 µA
I_{CEO}	Collector-Emitter Dark Current	-	-	100	nA	V_{CE} = 10 V

Notes:
(1) Derate linearly 1.67 mW/° C above 25° C for L Series.
(2) RMA flux is recommended. Duration can be extended to 10 seconds maximum when flow soldering.
(3) Methanol or isopropanol are recommended as cleaning agents. Plastic housing is soluble in chlorinated hydrocarbons and ketones.
(4) The W Series includes wire terminations of 24" (610 mm) 7-strand, 26 AWG UL insulated wire on each terminal. Each device incorporates a wire strain relief at the housing surface. The insulation functions and colors are: anode (red), cathode (black), phototransistor collector (white) and phototransistor emitter (green).
(5) All parameters tested using pulse technique.

General Note
TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

© TT electronics plc

TT Electronics | OPTEK Technology
2900 E. Plano Pkwy, Plano, TX 75074 | Ph: +1 972 323 2200
www.ttelectronics.com | sensors@ttelectronics.com


Electrical Characteristics (T_A = 25°C unless otherwise noted)


SYMBOL	PARAMETER	MIN	TYP	MAX	UNITS	TEST CONDITIONS
Combined						
$V_{CE(SAT)}$	Collector-Emitter Saturation Voltage Parameter A (OPB830L,OPB840L) (OPB835L, OPB845L) (OPB830W,OPB840W) (OPB835W, OPB845W)	-	-	0.4	V	I_C = 400 µA, I_F = 20 mA
	Parameter B (OPB831L,OPB841L) (OPB836L,OPB846L) (OPB831W,OPB841W) (OPB836W,OPB846W)	-	-	0.4	V	I_C = 800 µA, I_F = 10 mA
	Parameter C (OPB832L,OPB842L) (OPB837L,OPB847L) (OPB832W,OPB842W) (OPB837W,OPB847W)	-	-	0.6	V	I_C = 1800 µA, I_F = 20 mA
$I_{C(ON)}$	On-State Collector Current Parameter A (OPB830L,OPB840L) (OPB835L, OPB845L) (OPB830W,OPB840W) (OPB835W, OPB845W)	0.625	-	-	mA	V_{CE} = 10 V, I_F = 20 mA
	Parameter B (OPB831L,OPB841L) (OPB836L,OPB846L) (OPB831W,OPB841W) (OPB836W,OPB846W)	1.250	-	-	mA	V_{CE} = 5 V, I_F = 10 mA
	Parameter C (OPB832L,OPB842L) (OPB837L,OPB847L) (OPB832W,OPB842W) (OPB837W,OPB847W)	2.250	-	-	mA	V_{CE} = .6 V, I_F = 20 mA


General Note
TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.


© TT electronics plc

TT Electronics | OPTEK Technology
2900 E. Plano Pkwy, Plano, TX 75074 | Ph: +1 972 323 2200
www.ttelectronics.com | sensors@ttelectronics.com

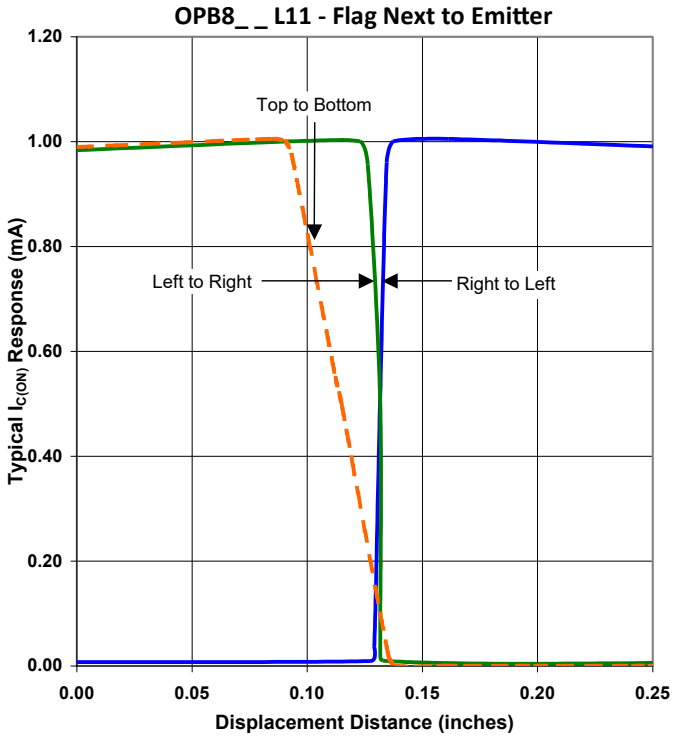

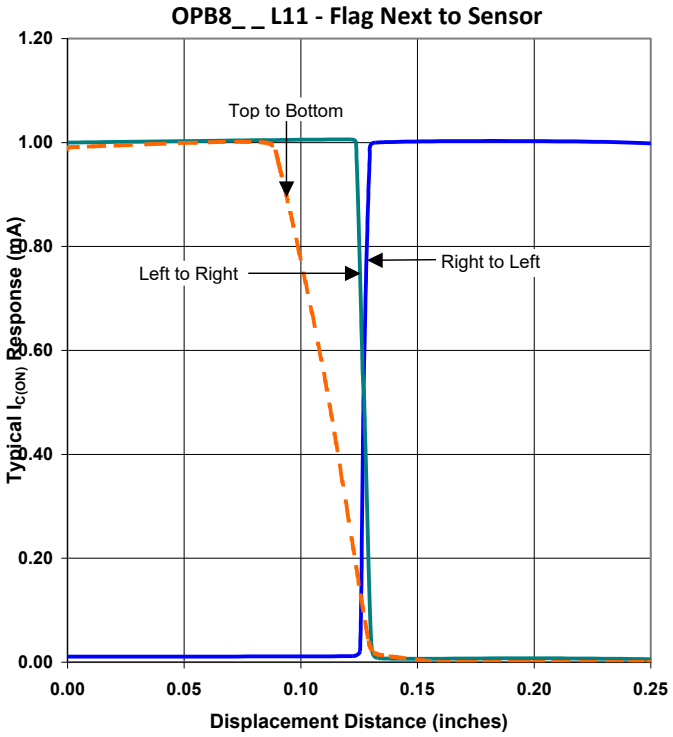

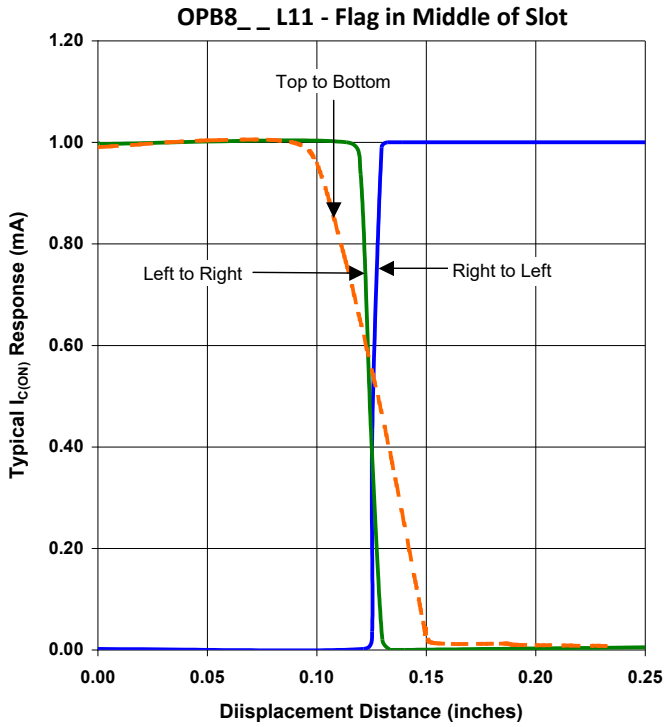


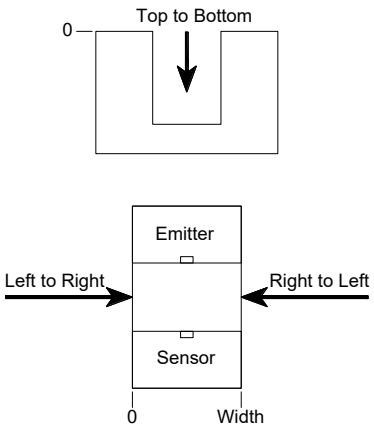



General Note
TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.


© TT electronics plc

TT Electronics | OPTEK Technology
2900 E. Plano Pkwy, Plano, TX 75074 | Ph: +1 972 323 2200
www.ttelectronics.com | sensors@ttelectronics.com

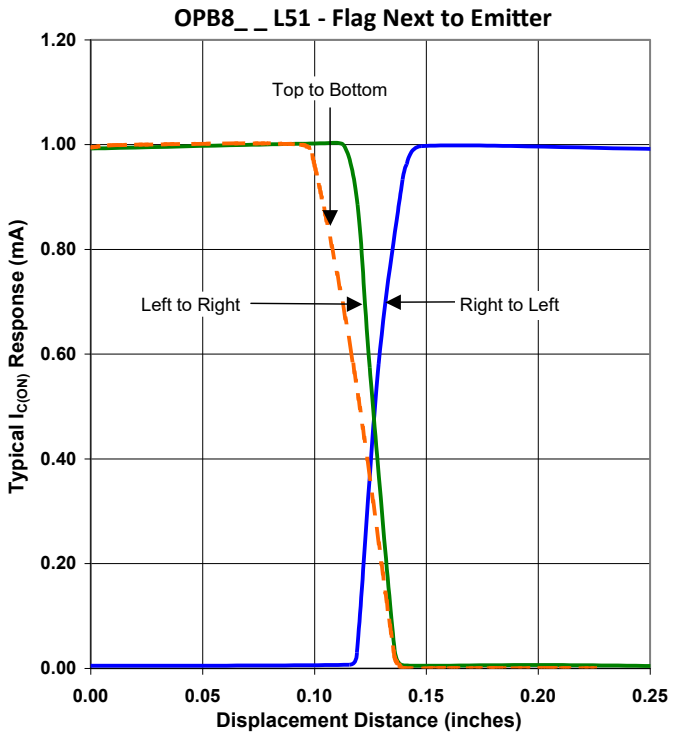

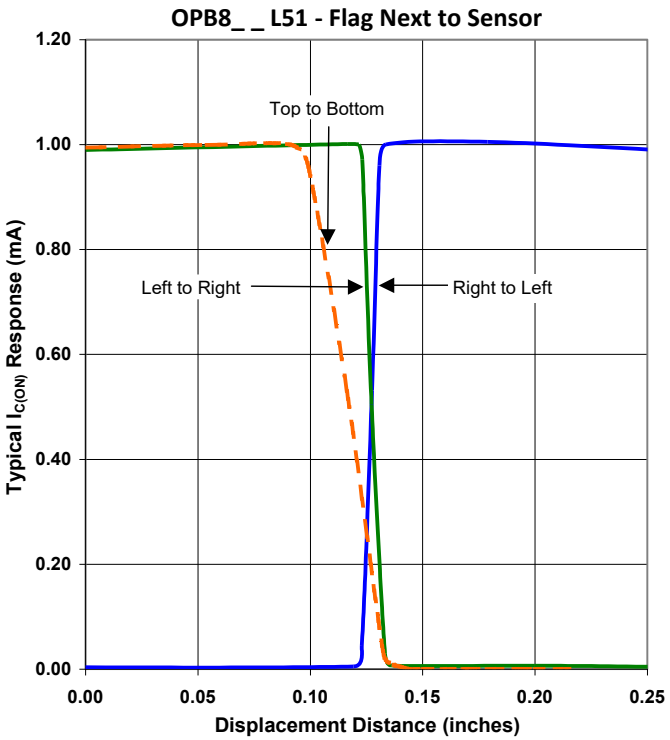

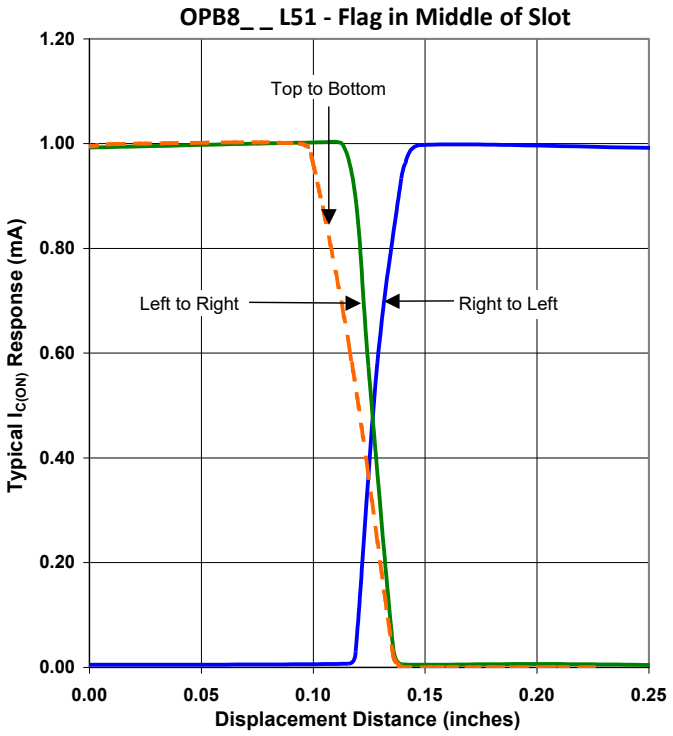


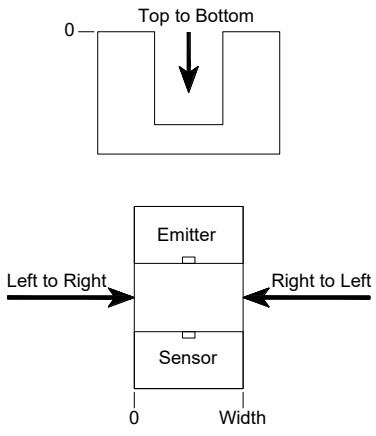



General Note
TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.


© TT electronics plc

TT Electronics | OPTEK Technology
2900 E. Plano Pkwy, Plano, TX 75074 | Ph: +1 972 323 2200
www.ttelectronics.com | sensors@ttelectronics.com

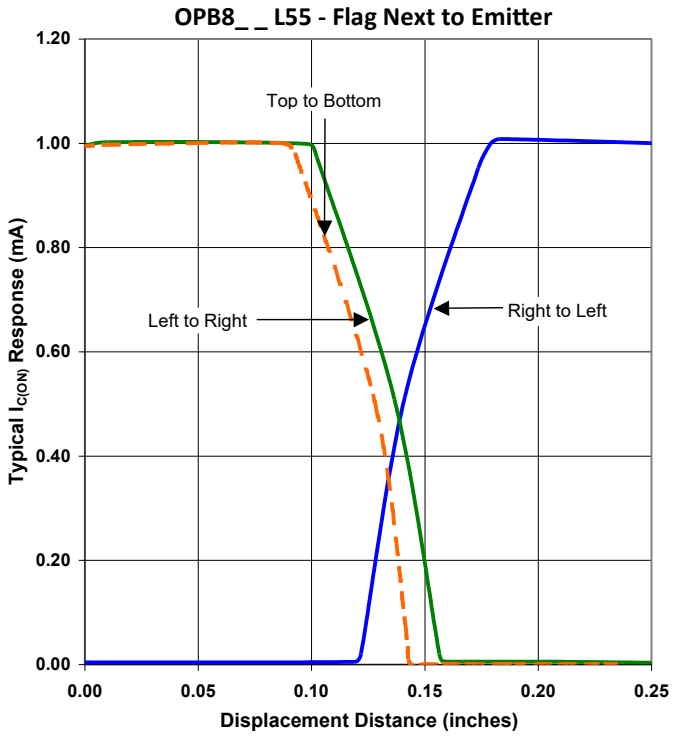

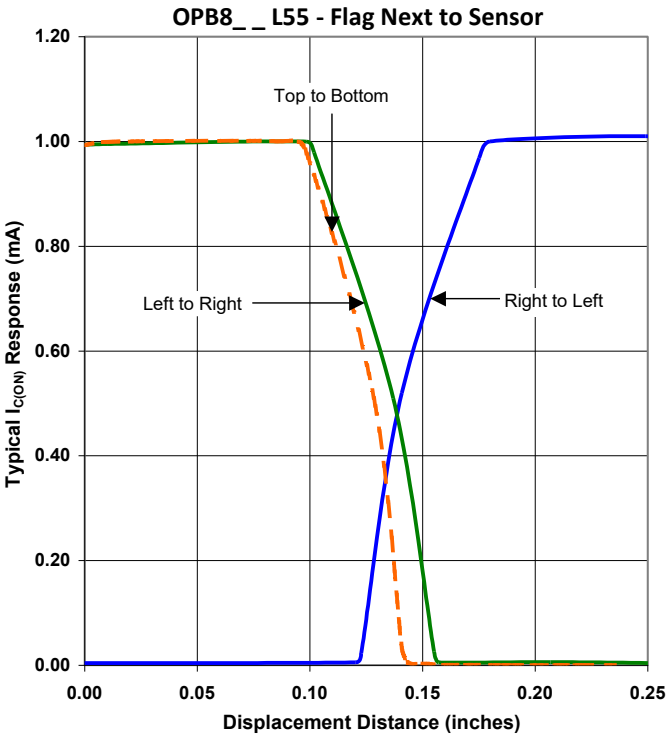

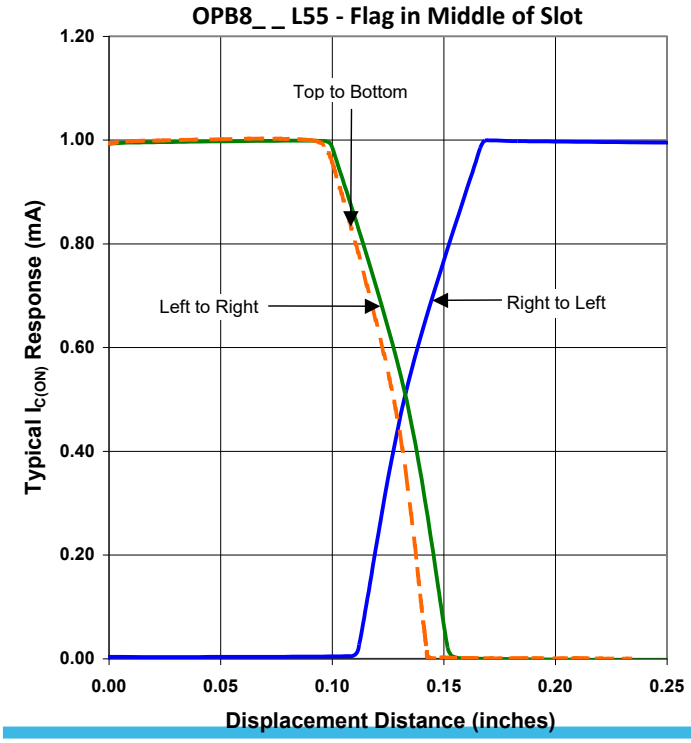

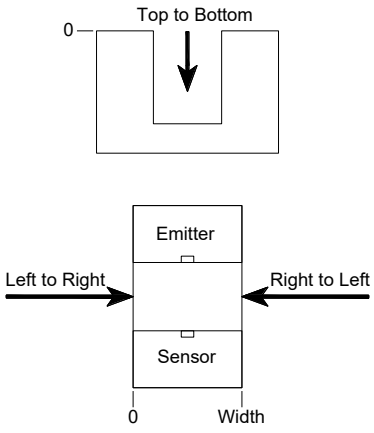


General Note
TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.


© TT electronics plc


TT Electronics | OPTEK Technology
2900 E. Plano Pkwy, Plano, TX 75074 | Ph: +1 972 323 2200
www.ttelectronics.com | sensors@ttelectronics.com

Packaging


OPB830/840L Series

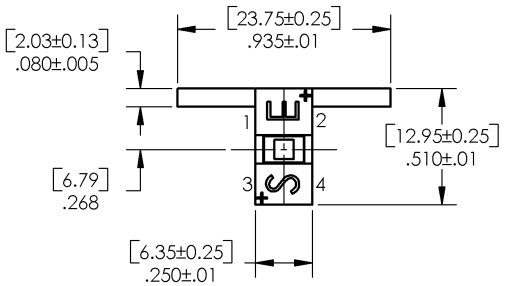

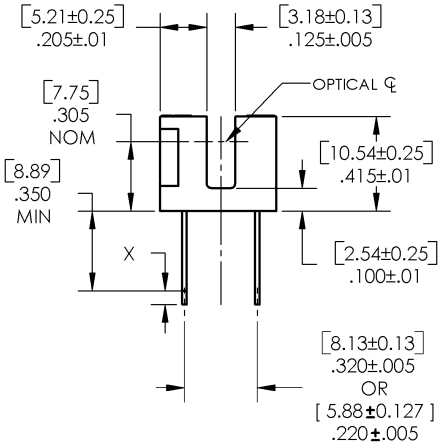

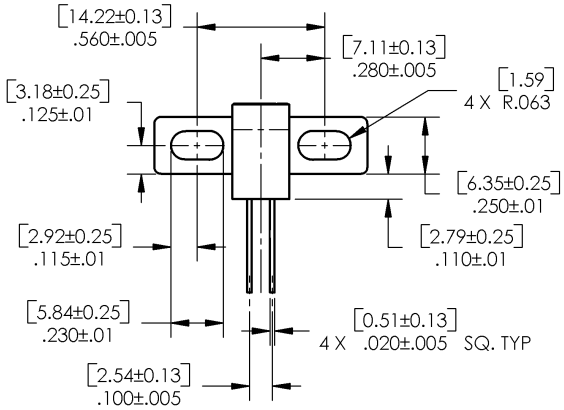



DIMENSIONS ARE IN INCHES AND [MILLIMETERS].




Pin # / Color	Description
1 / Black	Cathode
2 / Red	Anode
3 / White	Collector
4 / Green	Emitter

OPB830/840W Series

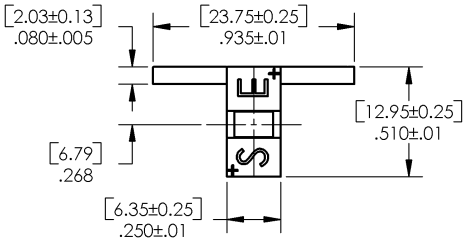

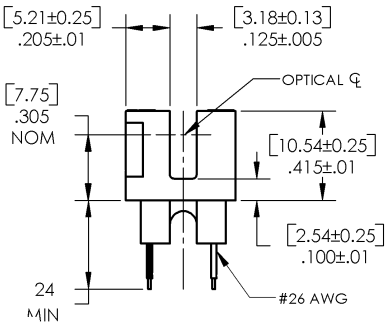

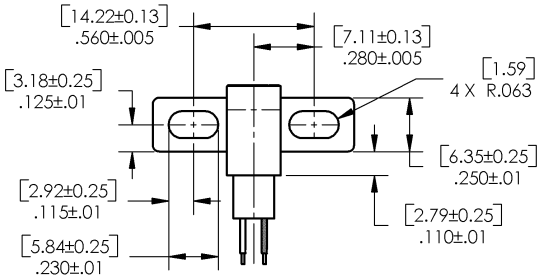

DIMENSIONS ARE IN INCHES AND [MILLIMETERS].

DIMENSIONS ARE IN: **[MILLIMETERS]**
INCHES

General Note
TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

© TT electronics plc

TT Electronics | OPTEK Technology
2900 E. Plano Pkwy, Plano, TX 75074 | Ph: +1 972 323 2200
www.ttelectronics.com | sensors@ttelectronics.com

Issue	Change Description	Approval	Date
1.0	Initial Release (4 pages)	Don Cook	10/21/04
A	Initial Release New Layout	Steve Coble	12/14/06
A.1	Change Collector Emitter Voltage and Collector Emitter Breakdown Voltage to 30 from 24 V.	Mark Miller	9/15/08
A.2	Correct Electrical, Change L to W under Parameter C for VCE(SAT) and IC(ON).	Mark Miller	10/20/08
A.3	Changed Pin-outs on page 2.	Mark Miller	12/18/2008
B	Moved part number guide to page 2	Brooke Combs	11/21/2019

General Note
TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

TT Electronics | OPTEK Technology
2900 E. Plano Pkwy, Plano, TX 75074 | Ph: +1 972 323 2200
www.ttelectronics.com | sensors@ttelectronics.com

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

TT Electronics:

OAR5 - R020FI P160KNP-0QC20A10K WHS3-33RJA1 OARS-XP-0R001 WH10-100RJI WDBR122RKT CAW104R70JLF LR1206-R10FW W24-33KJI LRMAP3920C-R001FT PCF0402PR-180RBT1 PCF0603PR-1K-BT1 PCF0603R-100KBT1 WA84-180RJI WP4S-1R5JA2 MFR3-10RFC WH25-8R2JI MFC0805-R10FT5 WH5-50RJI 67WR5KLFTB APC0805RD-10KBT5 RC55Y-210KBI SQP7S-82RJB15 WCR0805-82KFI WCR1206-200KFI OPB802W55Z OPB829CZ OVLBB4C7 ASC1206-150KFT5 BPR10101J