


ROHS

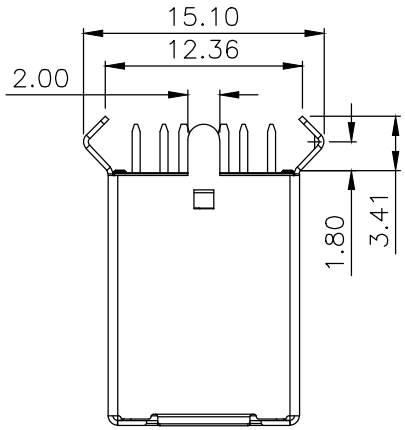



Pin NUMBER	SIGNAL NAME
1	VBUS
2	D-
3	D+
4	GND
5	StdB_SSTX-
6	StdB_SSTX+
7	GND_DRAIN
8	StdB_SSRX-
9	StdB_SSRX+
Shell	Shield

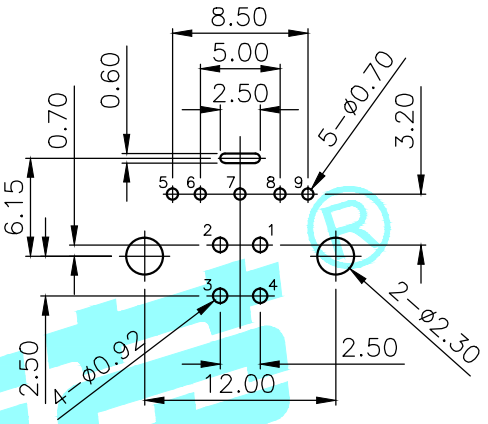


RECOMMEND P.C.B LAYOUT COMPONENT SIDE
DEFAUET TOLERANCES:±0.05 (PCB T=1.6mm)

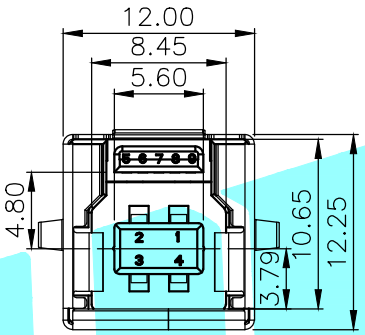

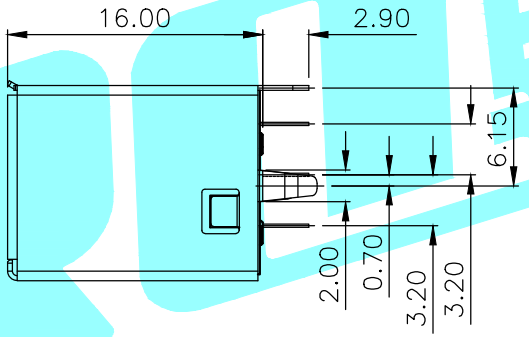

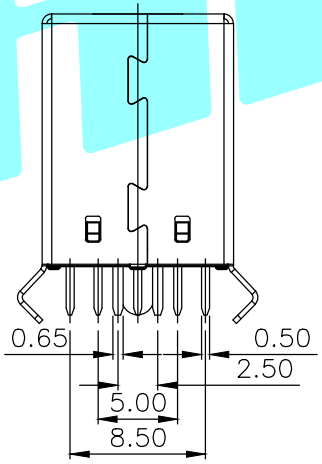

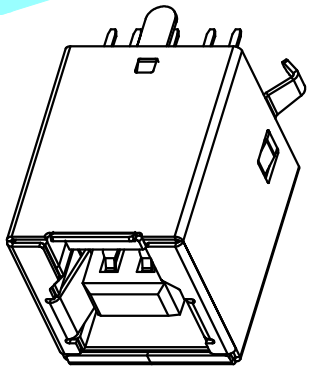

NOTES:

1.MATERIAL:
1.1 HOUSING: HIGIH TEMPERATURATURE THERAL PLASTIC.
1.2 COVER:HIGIH TEMPERATURATURE THERAL PLASTIC.
1.3 SPRING CONTACT: COPPER ALLOY.
1.4 FLAT CONTACT;COPPER ALLOY
1.5 SHELL :COPPER ALLOY.

2.FINISH:
2.1 CONTACT: (SEE P/N.),[50μ"] MIN. NICKEL UNDERPLATING OVER ALL.
2.2 SHELL: [50μ"] MIN.SOLDERABLITY NICKEL UNDERPLATING OVER ALL.

APPROVALS		DATE	HRO韩荣® ELECTRONICS CO.,LTD		
DRAWN	LIUCAN	2021.2.26			
CHECKED			TITLE:	USB CONNECTOR	
APPROVALS			PART NO.	U-B-M9DD-W-2	
TOLERANCES ARE: 30~以上 ±0.30; 10~30 ±0.25; 5~10 ±0.20; ~5 ±0.15; ANGLE ±2°			UNIT: mm	SCALE: 1:1	PROJ:
			DRAWING NO.	———	SHEET 1 OF 1

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
———	A	———	NEW	———	———	———

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

HRO:

U-M-M5DD-W-2 K2-1102DP-S3SW-04 K8-5851D-L1 U-C-M5DW-W-1 U-C-M5SS-Y-1 U-F-M5DS-Y-1 U-F-M5SS-W-5 DC-031A-10A K2-1102AT-A4CW-01 K2-1102BG-I4CW-01 K3-1346S-F1 K5-1617SA-01 PJ-3250-5A SIM-08A DA-10RP K2-1101DF-A4DW-01 K2-1102SP-K4SC-04 PJ-399B-6A U-F-M5DD-Y-L K2-1818DP-A3SW-01 U-F-M5DD-W-L DQ-03BP K3-2258S-E1 SS-22D03-G4 U-F-M5DD-Y-L1 DS-01BP K2-1102SP-A5SC-04 ES-07KP K2-1102DP-G4SW-04 TYPE-C-31-M-04