


MAPX	MODIFICATION	DATE

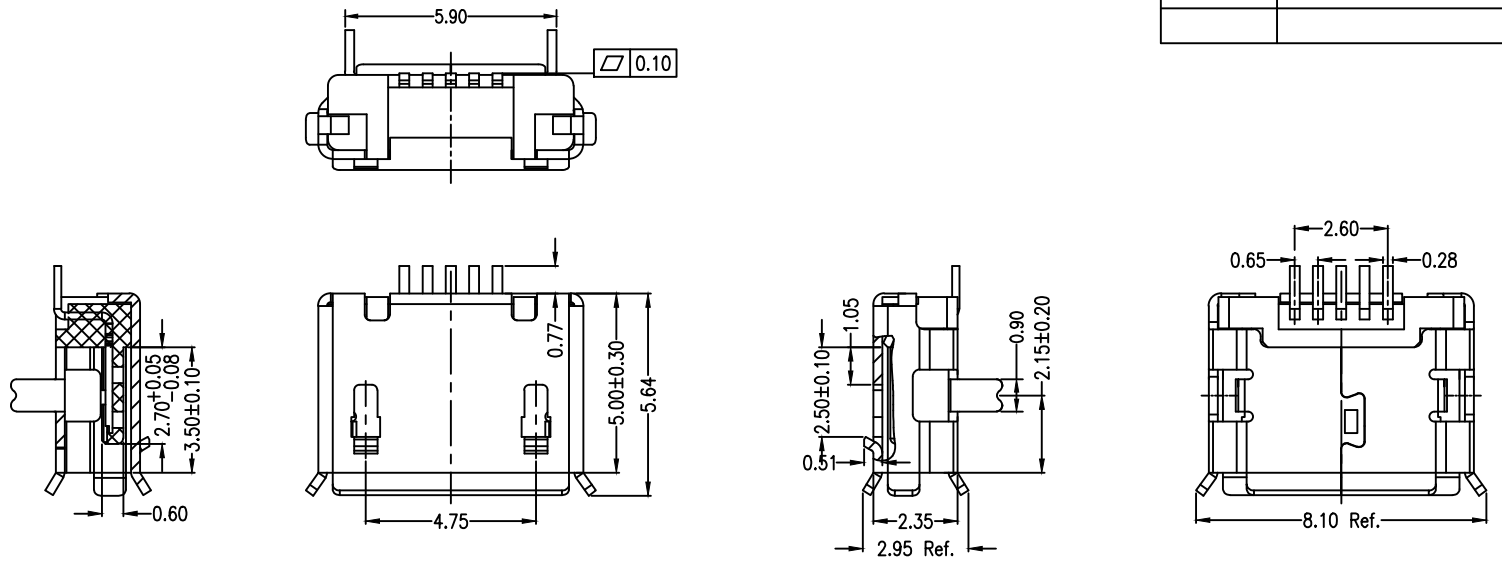

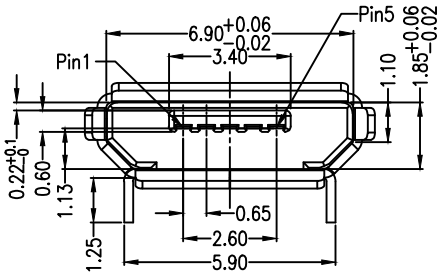

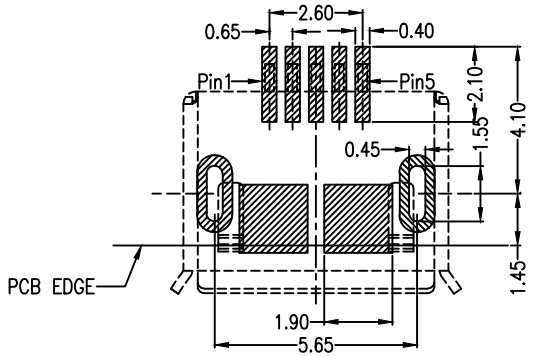

RECOMMANDED PCB LAYOUT

PCB图仅供参考

Note:

1.Material:

1.1 Housing: High temperature thermoplastic with g.f,UL94v-0

1.2 Contact: copper alloy,t=0.20mm

1.3 Shell: copper alloy,t=0.25mm

2.Specification:

2.1 Current rating:1,5PIN 1.8A Max/2,3,4PIN 1A Max.

2.2 Dielectric withstanding voltage: 100 V(ac) for 1 min.

2.3 Contact resistance: 30 mΩ Max.

2.4 Insulation resistance: 100 MΩ Min.

2.5 Total mating force: 3.57 Kgf Max.

2.6 Total unmating force: 1.0 Kgf Min.

2.7 Temperature range: -30°C~80°C

产品图 PRODUCT CHART DWG			深圳市精拓金电子有限公司						
公差一览表 TOLERANCE UNLESS OTHERMSE			单位 UNITS	MM	制图 DRAWING	YANG	制图料号 PRODUCT PART NO.	920-C52A2021S10108	
X.	±0.30	X. ±5.°	比例 SCALE	1:1	审核 CHKD	郭志富	产品名称 PRODUCT NO.	MICRO 5S B型5.9两脚长1.25插板有边无柱SMT端子加长0.75镀镍	
.X	±0.25	.X ±2.°							
.XX	±0.20	.XX ±1.°	日期 DATE	2019.11.23	核准 APPD	黄国荣	角法 VIEW		版本 VER A0
.XXX	±0.10	.XXX ±0.5°							

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Jing extension:

907-312A1101Y10210 912-112A1011D10100 918-418K2022Y40011 920-C62A2021S10103
912-112A2021S10100 919-162A1012D10400 920-C52A2021S10105 920-F52A2021S10105
906-752B1114D10200 920-A62A2021S10104 920-A62A2021S10108 918-415K3028S40000
904-232A2031S10100 904-232B2032S10100 905-761A2032S10200 917-B88C201AH70201
917-P81A202ES60201 904-331B2032S10200 910-151A2021D10100 918-318K2023C40005
918-468K2029Y50000 911-221A2021S10100 920-154A2021Y10110 920-A64A2091S101A3
906-552A1012D10200 907-111A1022D10200 916-151A1022Y10200 906-262A1021D10200
908-351A1011D10100 912-312A1012D10100