


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2025.06.26	阿树


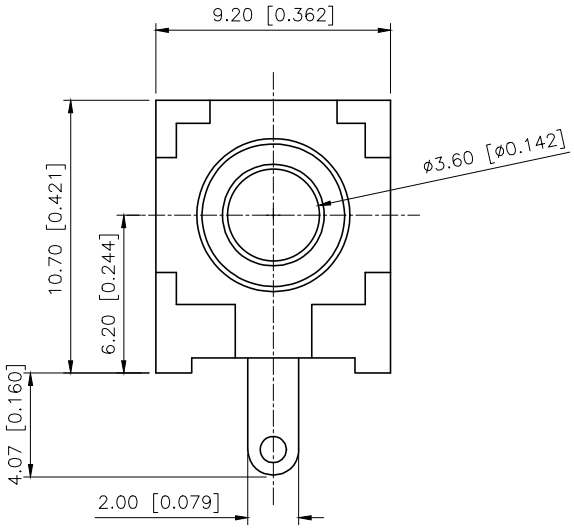


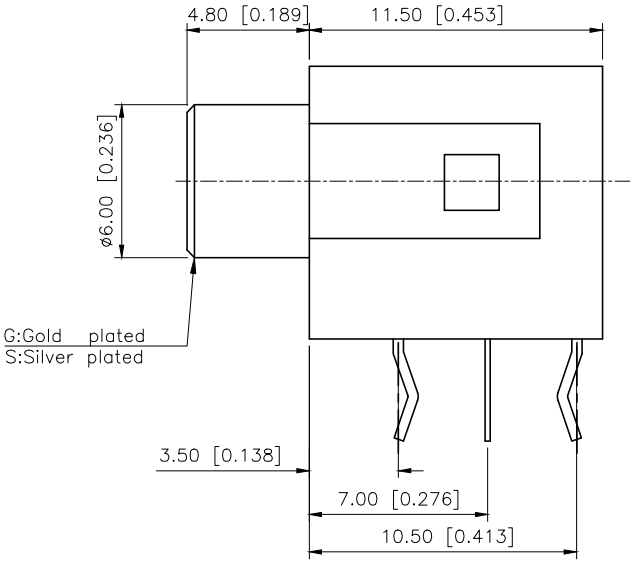

SPECIFICATION
1.Rating: DC 30V 0.5A;
2.Contact resistance: ≤50mΩ;
3.Insulation resistance: ≥100mΩ (DC250V)
4.Withstand voltage: 500VAC;
5.Insertion and extraction foree: 3–25N;
6.life test: 5,000 cycles.

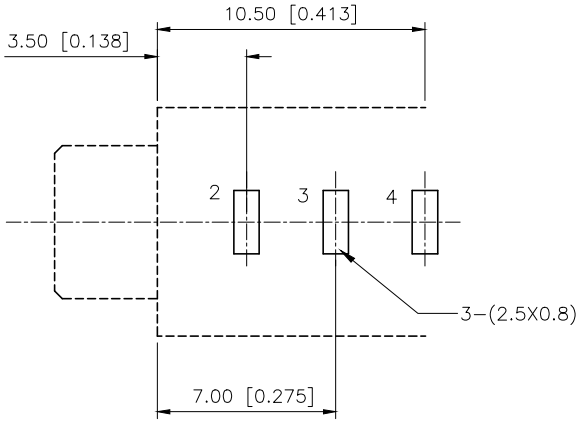

PCB Layout

Model No.	PJ–3762–X	PJ–3763–X
Schematic		

Plastic	PBT	
Terminal 4	Phosphor Bronze	TIN
Terminal 3	Phosphor Bronze	TIN
Terminal 2	Phosphor Bronze	TIN
PAPT NAMF	MATERIAL	PLATING

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERAuCES	

XKB Connection 星创

DESIGN	阿树	VIEW:	MODEL TYPE: 3.5 PHONE JACK
CHECKED		UNIT: mm/in	PART NO.: PJ–376X–X
APPROVED		SIZE: A4	DWG NO.:

XKB INDUSTRIAL PRECISION CO.,LIMITED

SCALE	PAGE	REVISION
N/A	1/1	A1

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

XKB Connection:

TS-1109S-A-A X1254WRS-04-LPSW X1321WV-2x02J-C30D23 XKTF-0803-0 DT-2325526 X1311FVS-04-C43D35R2 TS-3025-C-A-B TS-FS1212T-C-M U224-081N-1WR61 TS-1185-C-A-B-A TS-1186D-B-A X1311FVS-12-C43D35R1 X1311FVS-22-C43D35R2 DC-012-2.5A-2.5 X1311FVS-04-C43D35R1 X1321WV-2x12J-C30D23 TC-FS66D-C-F TS-1177-B-B-B X2026WV-2x09-N0SN TS-1177-C-B-B X01AB083DB1AD X1311FV-04-C43D24 X1311FVS-16-C43D35R2 X1515WRS-2x05-LPSW TC-1102DE-C-G TS-1187A-C-A-A X1515WRS-2x04-LPSW X2015H-2x03-N0 X6521WV-2x01H-C60D30 TC-1101V-C-C-W