

THIS DRAWING IS A CONTROLLED DOCUMENT.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	NEW RELEASE PER ECO-14-008763	20JUN2014	DM	DM
	B	REVISE PER PCN E-18-019936	21DEC2018	JA	DM



SCALE 3:4

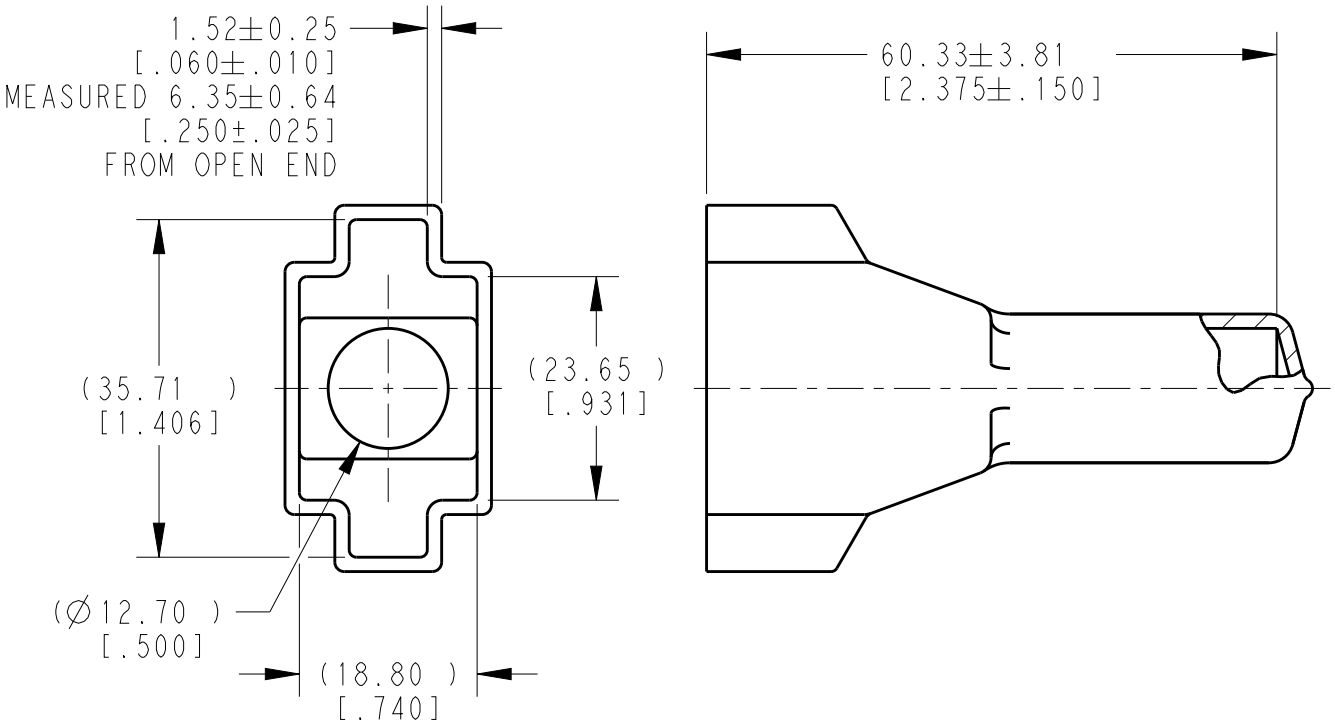

3. THIS ACCESSORY PART IS PROVIDED WITHOUT TYPICAL TRANSPORTATION INDUSTRY PROCESS CONTROLS. NO VALIDATION TESTING HAS BEEN PERFORMED. CUSTOMER IS RESPONSIBLE FOR DETERMINING PRODUCT PERFORMANCE AND SUITABILITY FOR APPLICATION.

2. TEMPERATURE RATING: -29°C TO +100°C [-20°F TO +212°F].

1. THIS PART IS USED ON DT06-08SX (X=A,B,C,D KEYS) PLUGS WITH ANY MODIFICATION THAT DOES NOT INCLUDE AN END CAP.

NOTES:

TE INTERNAL PN	DEUTSCH PN
DT8S-BT	DT8S-BT

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 2018
© COPYRIGHT 2014 BY TE CONNECTIVITY ALL RIGHTS RESERVED.

DIMENSIONS: mm [INCHES]

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	±
1 PLC	±
2 PLC	±
3 PLC	±0.63 [.025]
4 PLC	±
ANGLES	±0° 30′0"

DWN	D.MEYER	20JUN2014
CHK	R.MESSENGER	20JUN2014
APVD	D.MEYER	20JUN2014
PRODUCT SPEC		
APPLICATION SPEC		
WEIGHT	8.70g	

MATERIAL: PVC
FINISH: GRAY

TE Connectivity

NAME: BOOT, PLUG, 8 PIN DT SERIES

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A4	4AFU8	C-DT8S-BT	-

CUSTOMER DRAWING

SCALE	SHEET	REV
5:4	1 OF 1	B

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

TE Connectivity:

1903112-2 2005330-1 3430B2F51RTDF 1969656-1 2834055-1 CPF0402B37K4E1 MPT100C18RF SBCHE64R7K 1-794222-0 2-292161-3 3631B101LL 1393431-1 141991-2 917696-1 936348-1 U5254-000005-030PA 1743455-2 2377783-2 ROX05SJ18R SBCHE154R7K 1-962915-1 2310537-1 3-1393225-0 650075-000 RH73H2A40MKTN TE50BR39J 175977-2 2380312-2 CRGCQ2010J3K3 SMW73R0JT