



ROHS

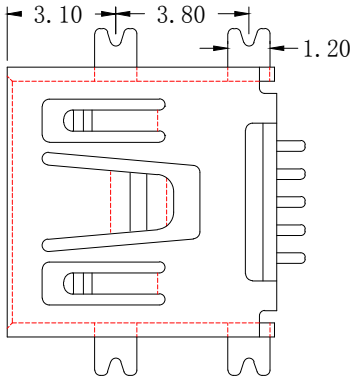


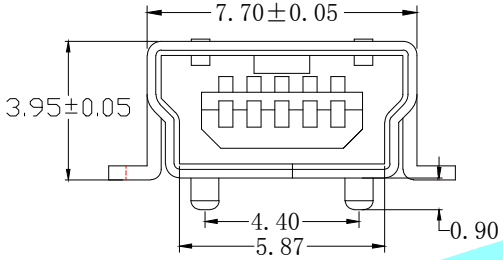

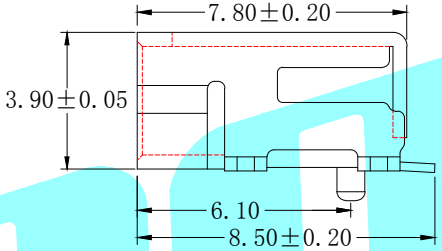

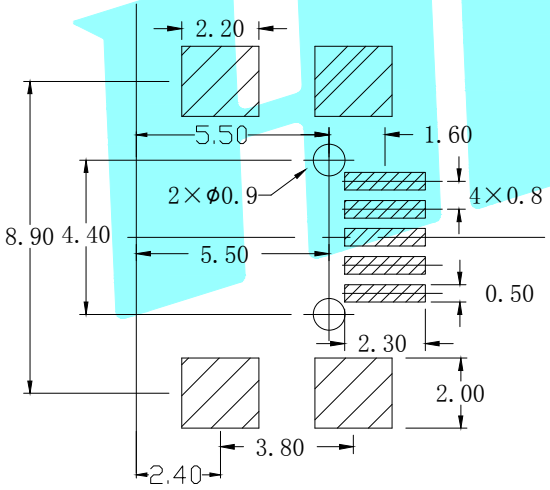

Recommended PCB Layout

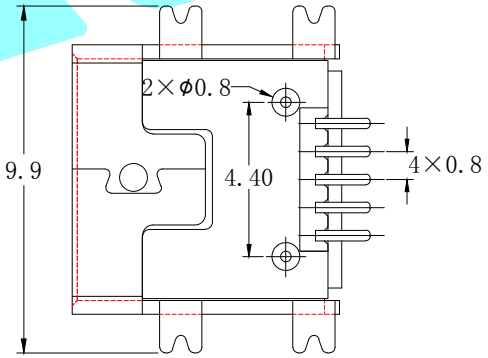

规格说明:Specifications:

电气特性:Electrical:

1. 额定电流：Current Rating
   1.0A/contact terminal
2. 额定电压：Voltage Rating
   30V DC
3. 接触阻抗:Contact Resistance
   50 milliohms MAX
4. 耐电压:Dielectric Withstanding Voltage:
   300 V AC AT Sea Levol
5. 绝缘阻抗:Insulation Resistance:
   100MEGA ohms MIN

原材料:Raw material:

1. 塑胶:Plastic cement:
   Hing Temperature Thermoplastics,
   LCP Black
2. 端子:Contact:Copper Alloy C2680/C5191
3. 外壳:Shell: Copper Alloy C2680

电镀:Electroplate:

1. 端子:Contact: Piated Gold in Mating Area;
   Tin On Solder Talls
2. 外壳:Shell:
   Nickel Plating

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			

APPROVALS		DATE	HRO韩荣® ELECTRONICS CO.,LTD	
DRAWN	LIUCAN	2021.5.29		
CHECKED			TITLE:	USB CONNECTOR
APPROVALS			PART NO.	U-M-M5SS-W-7
TOLERANCES ARE: 30~以上 ±0.30; 10~30 ±0.25; 5~10 ±0.20; ~5 ±0.15; ANGLE ±2°			UNIT: mm	SCALE: 1:1 PROJ:
			DRAWING NO.	SHEET 1 OF 1

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

HRO:

U-F-M5DD-Y-L U-F-M5DD-Y-L1 DC-031A-10A K2-1102AT-A4CW-01 K2-1102SP-A5SC-04 K3-2258S-E1 SIM-08A K2-1102SP-K4SC-04 K3-1346S-F1 PJ-3250-5A SS-22D03-G4 U-C-M5DW-W-1 U-C-M5SS-Y-1 U-F-M5DS-Y-1 DS-01BP K2-1102BG-I4CW-01 PJ-399B-6A DA-10RP DQ-03BP ES-07KP K2-1102DP-S3SW-04 U-F-M5DD-W-L U-M-M5DD-W-2 K2-1818DP-A3SW-01 K5-1617SA-01 TYPE-C-31-M-04 U-F-M5SS-W-5 K2-1102DP-G4SW-04 K8-5851D-L1 K2-1101DF-A4DW-01