

XKB Connectity

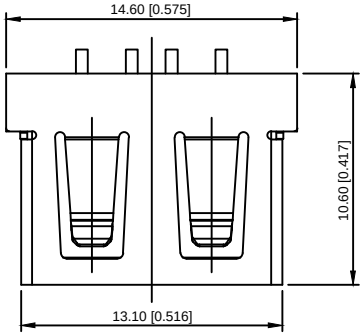

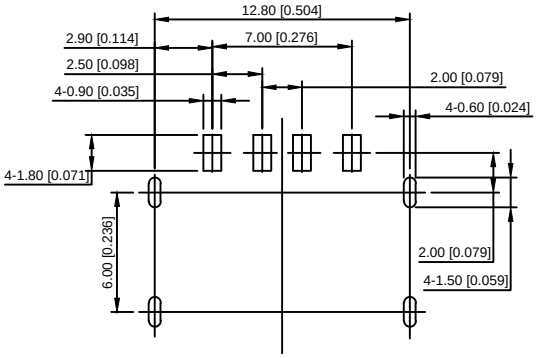

RECOMMENDED P.C.B LAYOUT
PCB THICKNESS=0.60MM(TOLERANCE=±0.05)

XKB Connectity


XKB Connectity


1. 材料规格MATERIAL SPECIFCATION:
   1) 胶壳 HOUSING: WHITE PBT UL94V-0.
   2) 外壳 SHELL: SPCC T=0.30mm
   4) 接点 CONTACT: C5191 T=0.25mm


2.电镀 PLATING:
   1) 接点 CONTACT :
   G/F GOLD PLATING ON CONTACT AREA
   80~100u".Bright Tin PLATING ON SOLDER TAILS
   50u"Min.Nickel UNDERPLATING OVER ALL
   2) 外壳 SHELL: 50u"Min.Nickel Underplated Over All

3. 电气特性 ELECTRICAL CHARACTERISTIC:
   1) 电压电流额定值 VOLTAGE GURRENT RATING: 1AMP,30V DC;
   2) 绝缘电阻 INSULATION RESISTANCE: 1000MΩ¸MIN;
   3) 接触电阻 CONTACT RESISTANCE: 30m¦¸MAX;
   4) 耐压 WITHSTANDING VOLTAGE: 500V AC;


4. 机器特性 MACHINE CHARACTERISTICS:
   1) 插入力 MATING FORCE:3.57 KG MAX
   2) 拔出力 UNMATING FORCE:1.02 KG MIN.



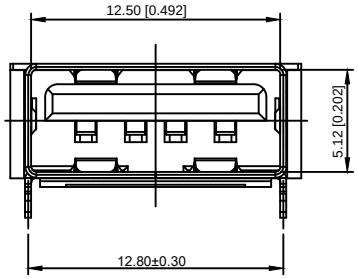

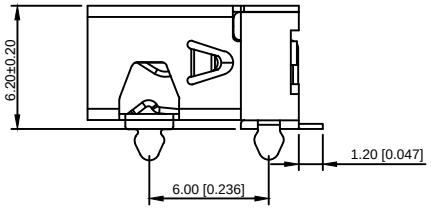

XKB Connectity

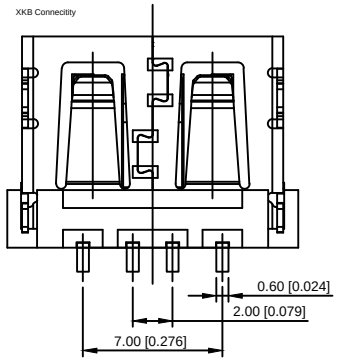

XKB Connectity

U221-04XN-1WVS62-F5D

- 1:Au 1U" 6:Au 30U"
- 1:PBT 2:PA6T 3:PA9T 4:LCP
- W:WHITE B:BLACK
- 1:SPCC 5:BRASS
- S:Scrolls F:Flat

MARK	DESCRIPTION	DATE	REVISED	APPROVED
ΔX				
ΔX				
ΔX				

REVISIONS

UNSPECIFIED TOLERANCES	
ANGLAR	±5°
L≤4	±0.2
4<L≤16	±0.3
16<L≤63	±0.4
L>63	±0.5

DSND		DATE		SCALE: N/A	MODEL TYPE: USB 2.0
DWN		DATE		VIEW:	PART NO.:
CHKD		DATE		UNIT: mm/in	DWG NO.: U221-04XN-1WVS62-F5D
APPD		DATE		SIZE: A4	

XKB INDUSTRIAL PRECISION CO.,LIMITED

WEIGHT	SHEET	REVISION
1.0g	1/1	A0

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

XKB Connection:

X0544FC2W5 X8821HM-04L-N0 X9357WV-2x04HN-N2SN DC-013A-2.5A-2.0 X2009WVS-02-9TSW
X2521HM-04G-N0 DSIC05LS-P PJ-242D-SMT X4622WV-2x22I-C40D28-E60 DC-002H-2.5A-1.0
U254-051T-4BHJ25-S2S X05B20L12G X0811FVS-80BS-LPV01 DC-025BM-5A-2.5 DC-025M-5A-2.0
DSIC05LH-P TC-1109-C-A K205001HF-03-PT PJ-3062-HD-R TS-1103S-B-H X02AHIWA1DB4008
X0582FVS-80AS-LPV01 TS-1102S-C-K-B X5511FV-16-C70D30-1000 X1502WR-05K-N0SN DC-044AE-2.0
TS-1101VS-C-A-B U263-241N-4BQC16-1 X05A26H12G X9396T-BSN