


PART NO. **RFB-1106-5**


REV	DESCRIPTION	DWN	DATE	APPROVED
A	ENGINEERING RELEASE	CZS	8/12/99	R. RICE
B	CHANGE FORMAT & DWG # 9226	GGG	02/4/02	JDMc

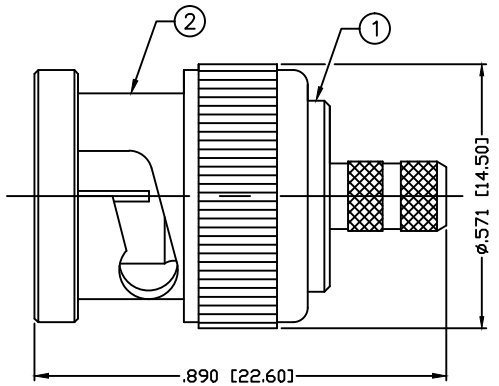




RECOMMENDED CRIMP DIE: .068"





RECOMMENDED CRIMP DIE: .130" & .178"



RECOMMENDED STRIPPING DIMENSIONS

SPECIFICATIONS:

IMPEDANCE: 50 Ohms
FREQUENCY RANGE: 0–4 GHz
VSWR: 1.3 Max.
WORKING VOLTAGE: 500 V rms @ sea level
TEMPERATURE RANGE: –65°C TO 85°C
INSULATION RESISTANCE: 5k M Ohms min.
FOR RG–174, 188, 188A, 316/U, ALPHA 9174, 9316, BELDEN 8216, 83269, 83284, 84316 & TIMES LMR–100A CABLE

#	DESCRIPTION	QTY	MATERIAL	FINISH
1	BODY	1	BRASS	NICKEL, 100μ"
2	SHELL	1	BRASS	NICKEL, 100μ"
3	INSULATOR	1	PTFE	--- μ"
4	GASKET	1	RUBBER	---
5	RETAINING RING	1	BRASS	NICKEL, 100μ"
6	SPRING	1	SK5	NICKEL, 100μ"
7	WASHER	1	BRASS	NICKEL, 100μ"
8	PIN	1	BRASS	GOLD, 3μ"
9	INSERT	1	DELRIN	---
10	FERRULE	1	BRASS	NICKEL, 100μ"

CUSTOMER OUTLINE DRAWING

ALL DIMENSIONS ARE REFERENCE ONLY

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES AND [MILLIMETERS]

DRAWN	G. GALLEGOS	02/4/02
CHECKED		
ORJ DRAWN	C. ZUNIGA	XXXXXX

RoHS COMPLIANT

PROPRIETARY AND CONFIDENTIAL

THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO RF INDUSTRIES, ANY UNAUTHORIZED USE OF THIS DRAWING IS EXPRESSLY PROHIBITED WITHOUT WRITTEN PERMISSION FROM RF INDUSTRIES. ANY VIOLATION IS PUNISHABLE UNDER U.S. COPYRIGHT LAWS.

RF connectors
DIVISION OF RF INDUSTRIES, LTD.
7610 MIRAMAR RD.
SAN DIEGO, CA 92126
(858) 549–6340
(858) 549–6345 FAX

BNC PLUG CRIMP

SIZE	CABLE GROUP	DWG NO.	REV
A	B	RFB-1106-5	B

SCALE:	ENGINEERING ID:	SHEET
NTS	008974	1 OF 1

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

RF Industries:

RSA-3252-C RFU-601-1X RFU-633 RFW-5573-16 RFB-1124-1X RFT-1239 RFU-602-2 RQN-1300-SR2 RFD-1601-HPL RFD-1610DS-H4 RFU-500 RFU-505 RFU-600-6C1 RFW-5573-7 RQA-5000-SR2LP RSA-3402 RF123-7052-1B RFW-5573-60 RQA-5010-SR2LP RF123-7002-B RFB-1137 RFD-225M-SR2 RFN-1007-2SX RFU-507-SI COMP-TM-400PL RFU-600-5 RFU-601-3 RFU-632 RFW-12404-30-5 RSA-3478