

ROHS Compliant


MAPX	MODIFICATION	DATE	DRAW	APPROVE

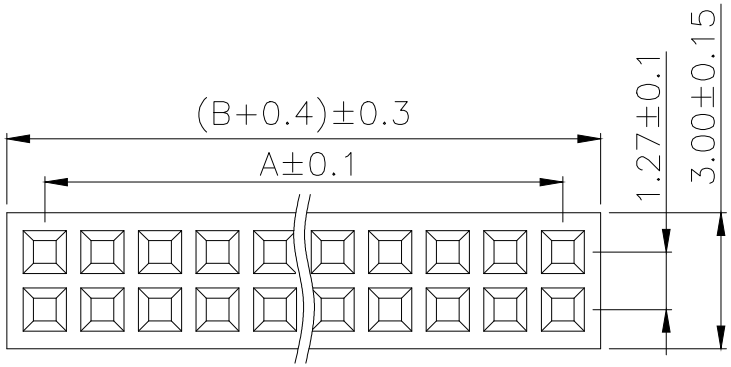

SPECIFICATIONS
Current Rating: 1.0 Amps
Withstanding Voltage:AC 500V
Insulation Resistance:1000MΩ Min
Contact Resistance:20mΩ Max
Operation Temperature:−40°to+105°
Insrlator Material:Polyester(UL94V−0)
Contact Material:Phosphor bronze
Standard:PA6T
Contact Plating:Gold Flash
Max.Processing Temp:240°C for30−60seconds
(260°C for5seconds)

P/N	PIN	DIM.A	DIM.B
FH1.27−01−01PZS	2*1	0.00	1.27
FH1.27−01−02PZS	2*2	1.27	2.54
FH1.27−01−03PZS	2*3	2.54	3.81
FH1.27−01−04PZS	2*4	3.81	5.08
FH1.27−01−05PZS	2*5	5.08	6.35
FH1.27−01−06PZS	2*6	6.35	7.62
FH1.27−01−07PZS	2*7	7.62	8.89
FH1.27−01−08PZS	2*8	8.89	10.16
FH1.27−01−09PZS	2*9	10.16	11.43
.....	.....	.....	.....
FH1.27−01−50PZS	2*50	(PIN−1)x1.27	(PIN)x1.27

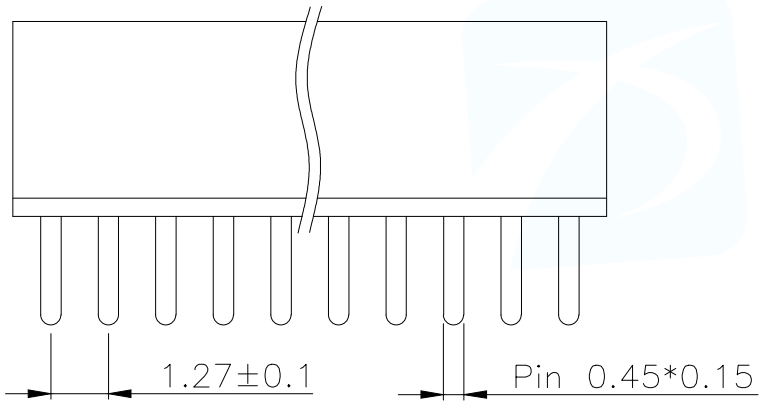


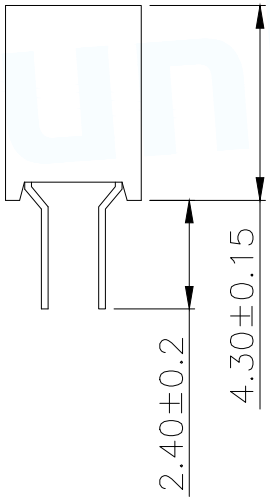

PART NUMBER DESCRIPTION:

FH1.27−01−NPZS

- (D＝单排;S＝双排)
- (Z＝直脚;W＝弯脚)
- (PIN数量;01.....50PIN)
- (排针开关)

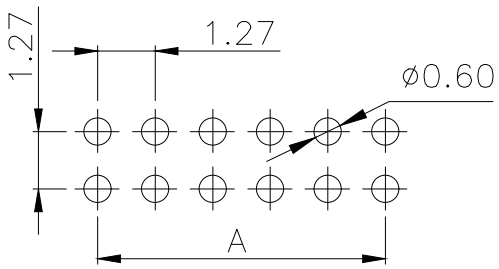

RECOMMEND P.C.B LAYOUT

PCB TOLERANCE:±0.05 (TOP VIEW)

MANUFACTURE DWG	东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co,Ltd			
UNLESS OTHERWISE SPECIFED TOLERANCES		TITLE:1.27FH H4.3 2xnPin 180度 W3.0 U型 PC2.4 6T		
		PAR	FH1.27−01−NPZS	
DECIMALS: / ANGLES:		DWN		
X.±0.30 / X°±5°		CHKD		
X.X±0.20 / X.X°±1°		APVD		
X.XX±0.10 / X.XX°±0.5°	CUSTOMER COPY	SCALE N:A	UNIT:MM	
		SIZE:A4	SHEET:1F1	REV:A

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

XUNPU:

FPC-1.0HF-4PWAR-H20 FPC-0.5AX-30PWCR-H20 FPC-0.5FX-20PWBH15 WAFER-MX1.25B-8PWB
WAFER-PH2.0-3PWB WAFER-PH2.0-6PWB FPC-0.5AL-6PB FPC-0.5FX-4PWBH15 WAFER-PH2.0-11PZZ
FPC-0.5AX-24PWCR-H20 FPC-0.5HF-10PWBR-H20 SMA-KWE-323C-H13X23-LW
FPC-1.0AX-14PWCR-H25 WAFER-VH3.96-4PLB FPC-0.5FX-14PWCR-H20 FPC-0.5FX-4PWCR-H20
WAFER-PH2.0-8PLB MU-103-ARW64 PHB2.0-02-20PZZ WAFER-PH2.0-2PJK DC-031A-A100
FPC-0.5FX-16PWCR-H20 HDMI-212L RJ45-005-014-11 TYPEC-304YDSW-ACP16 FPC-0.5AS-5PWCR-H20
FPC-1.0AX-4PWCR-H25 WAFER-GH1.25-6PLB WAFER-WBM4.2-16PJK-GB WAFER-XH2.54-4PWZ-H62