





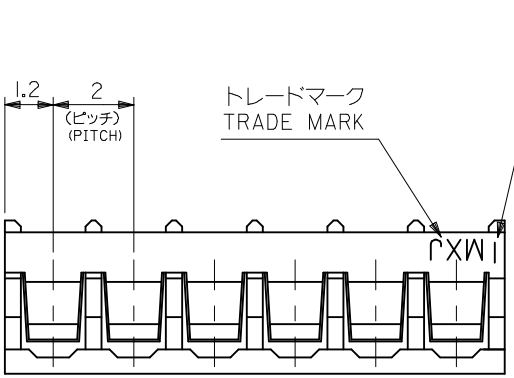

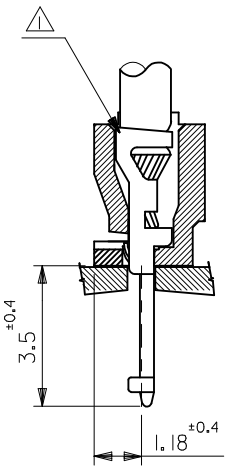

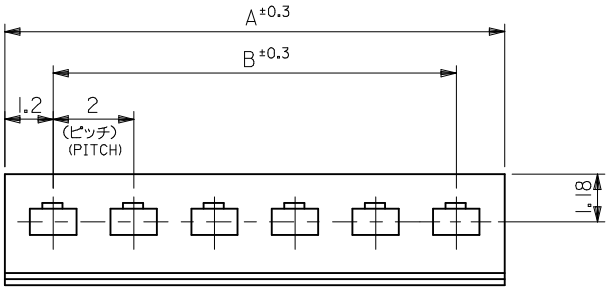

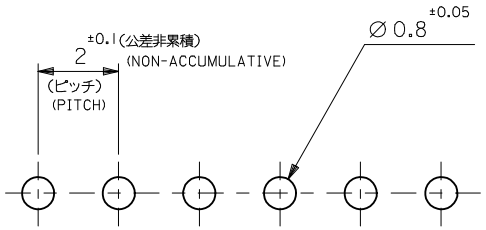

基板取付穴推奨寸法

(基板厚：t＝1～1。6mm)
RECOMMENDED PC BOARD
HOLE DIMENSION
(THICKNESS:t=1～1.6mm)

注記
NOTE

⚠ 適合ターミナル：50034 8*00
APPLICABLE TERMINAL:50034 8*00

2. 材料 ハウジング： ポリアミド, UL94V-0
色： ナチュラル(白)
MATERIAL HOUSING: POLYAMIDE, UL94V-0
COLOR: NATURAL(WHITE)

3. ELV 及び RoHS 適合品
ELV AND RoHS COMPLIANT.

28	30.4	51015 1500	15
26	28.4	1400	14
24	26.4	1300	13
22	24.4	1200	12
20	22.4	1100	11
18	20.4	1000	10
16	18.4	0900	9
14	16.4	0800	8
12	14.4	0700	7
10	12.4	0600	6
8	10.4	0500	5
6	8.4	0400	4
4	6.4	0300	3
2	4.4	51015 0200	2
B	A	ORDER No.	極数 NO. OF CKT

REVISED
EC NO: J2012-0968 2012/01/18
DRWN:KWASHIO 2013/04/09
CH'KD:KASAKAWA 2013/04/10
APPR:YOITO
DESCRIPTION
REV

GENERAL TOLERANCES (UNLESS SPECIFIED)

10 UNDER	±0.2
10 OVER 30 UNDER	±0.25
30 OVER	±0.3
ANGULAR ±3 °	

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE	MM ONLY
SCALE	8:1
DESIGN UNITS	METRIC
	THIRD ANGLE PROJECTION
DRAWN BY / DATE	HIIJIMA 1996/05/28
CHECKED BY / DATE	MFUKUSHIMA 1996/05/28
APPROVED BY / DATE	
TITLE	2.0 BOARD IN CONN HSG
	molex MOLEX INCORPORATED
MATERIAL NO.	SEE CHART
DOCUMENT NO.	SD-51015-**00
SHEET NO.	1 OF 1
SIZE	A3

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

molex:

502584-1060 528520870 528523070 194290039 194270031 194290026 347910140 355240920 502584-0870 502585-0370 503988100 528061110 0194360214 0477256010 197054301 347928042 0464363133 348242245 464373005 34708-2028 351820290 459850483 5023860371 347072012 348268126 349672001 0351510214 197134001 357470310 502380-0800