


RoHS


Parts Drawing

REVISIONS				
SYM	ECN No.	MODIRICATION	DATE	ISSUED

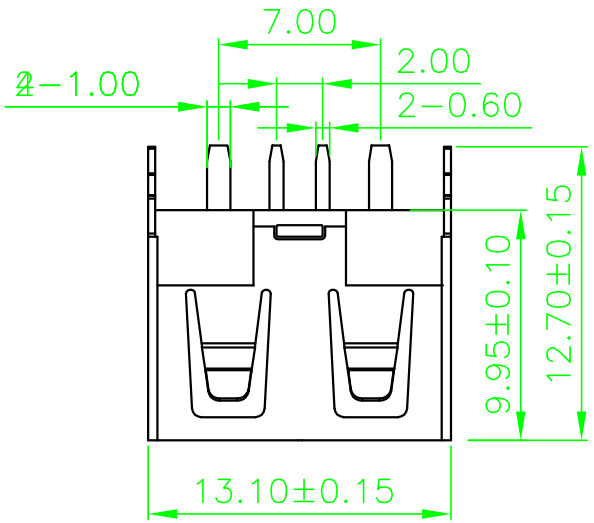

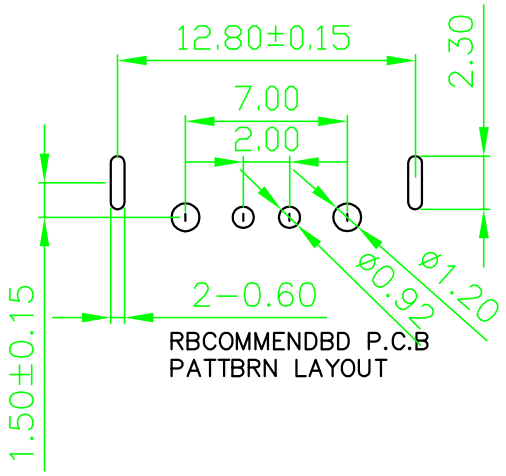

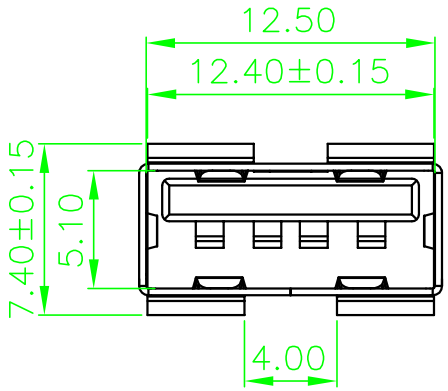

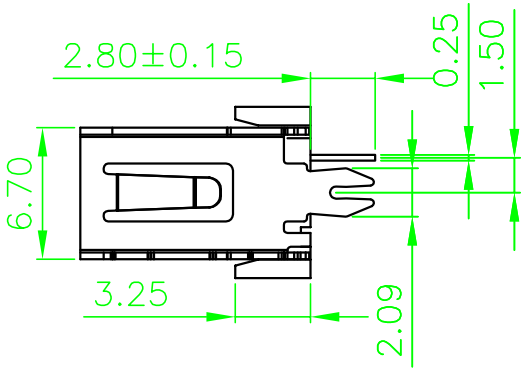

Note:
1.Material:
1.1,Housing: High temperature thermoplastic with/black G/F,UL94v-0
1.2,Contact: copper alloy,t=0.25mm
1.3,Shell: copper/Ferroalloy alloy,t=0.30mm
2.Specification:
2.1,Current rating:3A/5A Max.
2.2,Dielectric withstanding voltage: 100 V(ac) for 1 min.
2.3,Contact resistance: 30 mΩ Max.
2.4,Insulation resistance: 100 MΩ Min.
2.5,Total mating force: 3.57 Kgf Max.
2.6,Total unmating force: 1.0 Kgf Min.
3.Finish:
3.1,Contact: Piated Golg in Mating Area: Tin On Solder Talls
Shell: Nickel Plating
4.Environmental:
4.1,Temperature range: -55°C~85°C

PART ON:
919-56XAXXX1Y2XX

- 电镀规格；02,镀金1u″ 04,镀金3u″ 07,镀金15u″ 08,镀金30u″
- 端子材质；1,青铜 2,磷铜
- 端子规格；D,90度 Y,180度 S,SMT贴板
- 塑胶型态；1,6.2有耳 6,6.2无耳
- 塑胶颜色；01,白色 02,黑色 03,本色
- 塑胶材质；1,PBT 2,LCP 3,PA9T 4,PPA 5,PA6T
- 对插方向；A,正向 B,反向
- 外壳材质；1,铁壳 2,铜壳
- 插口类型；5,有边 6,无边
- 外壳脚型；1,前两脚 2,后两脚 3,四脚 4,无脚 5,鱼叉脚
- 类别：E款

1	919-561A1011Y102	5	
2		6	
3		7	
4		8	

DRAWN	JTJ 深圳市精拓金电子有限公司				
CHECKED	TITLE: AF大电流10.0短体180度鱼叉脚无边铜壳PBT黑胶	PART NO. 916-362A1024Y10210			
APPROVED		DRAWING NO. R919561A1011Y102			
3rd ANGLE PROJECTION	UNIT: mm	TOLERANCE: .XXX±.10, .XX±.25, .X±.38, ANG±5°	SCALE: 1:1	SHEET: 1 OF 1	SIZE: A4 / REV.: X1

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Jing extension:

904-331B2032S10200 907-312A1101Y10210 908-351A1011D10100 912-112A2021S10100
912-312A1012D10100 918-318K2023C40005 910-151A2021D10100 912-112A1011D10100
916-151A1022Y10200 918-415K3028S40000 918-468K2029Y50000 919-162A1012D10400
906-262A1021D10200 906-752B1114D10200 920-C52A2021S10105 905-761A2032S10200
911-221A2021S10100 920-A62A2021S10108 920-C62A2021S10103 920-154A2021Y10110
920-A62A2021S10104 920-A64A2091S101A3 917-B88C201AH70201 920-F52A2021S10105
904-232A2031S10100 906-552A1012D10200 907-111A1022D10200 917-P81A202ES60201
918-418K2022Y40011 904-232B2032S10100