


NOTES:
1. MATERIALS AND FINISHES:
   BODY – BRASS, NICKEL PLATING
   CONTACT – BRASS,GOLD PLATING
   INSULATOR – PTFE
2. ELECTRICAL:
   A. IMPEDANCE: 50 OHM
   B. FREQUENCY RANGE: DC 0–4 GHz
   C. DIELECTRIC WITHSTANDING VOLTAGE: 1500 VRMS, MIN.
3. MECHANICAL:
   A. DURABILITY: 500 CYCLES MIN.
   B. TEMPERATURE RANGE: – 65°C to +165°C
4. REFER. TO AMPHENOL SPEC.123–219. FOR CABLE TO CONNECTOR. INSTRUCTIONS AND SELECTION OF PROPER BRAID CRIMPING TOOL.


THIRD ANGLE PROJ.

REVISIONS				
REV	DESCRIPTION	DATE	ECO	APPR
B	SEE SHEET 1	04–Mar–08	– –	A.WU
T	REDRAWN TO UPDATE FORMAT	17-Feb-09	47239	

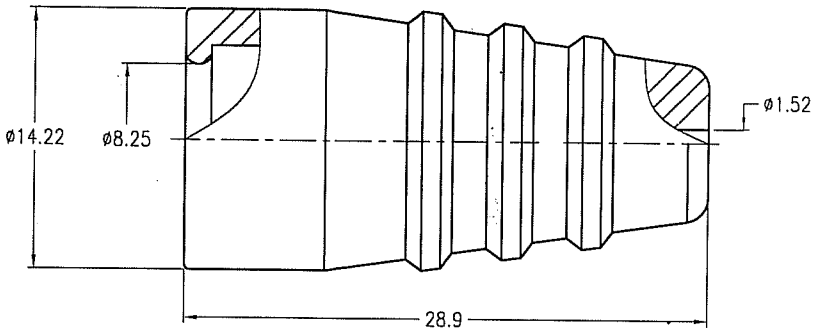

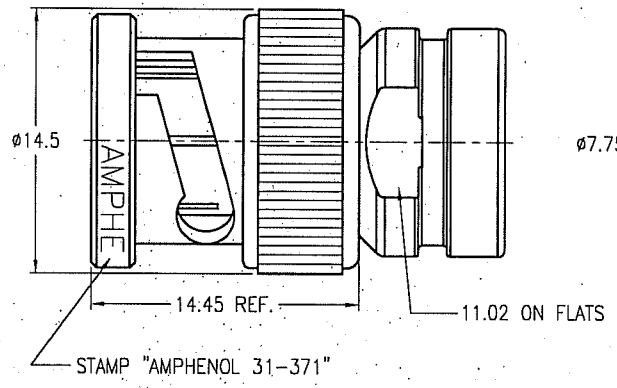

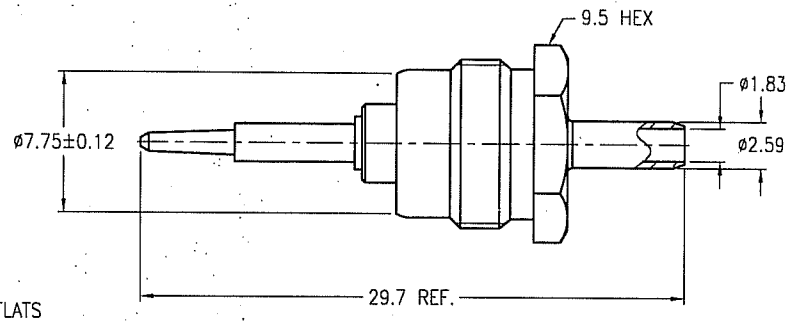



CUSTOMER OUTLINE DRAWING

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE:

0.5 – 6mm	6 – 30mm	30 – 120mm	ANGLES
±0.1mm	±0.2mm	± 0.3mm	±1°

NOTICE – These drawings, specifications, or other data (1) are, and remain the property of Amphenol Corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. The furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights or permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.

MATERIAL

REFERENCE

FINISH

DRAWN	SUSAN	DATE 04–Mar–08
ENGINEER	CISSY	DATE 04–Mar–08
APPROVED	ANGELA.W	DATE 04–Mar–08
CAD FILE	F:\DWG\CNPD\31\371–TSZ	

TITLE: QUICK CRIMP BNC PLUG (FOR RG–161/U, 174/U, 187/U, 188/U)

SCALE: 2.5/1	SHEET 2 OF 2	
DWG SIZE	CODE ID	REV
B	74868	T

Amphenol RF
Danbury CT USA, Tainan Taiwan, Shenzhen China
www.amphenolrf.com

DRAWING NO. 31–371

ITEM NO. 31–371

PART NO. 31–371

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Amphenol:

86093968191755E3LF 86093968813H45V1LF 91614-403ALF 95157-140LF 70218-1116LF D15P13A6RV12LF DCMF37P 54202-G0805CLF 67996-204HLF 863013A CD15S13E4RV09LF DEM09P032N RJE061661210 RJSBE5080C2 68001-200HLF 76384-316LF 68002116HLF 70234-112LF 86093488314745V1LF 65781-158 68001-108HLF 69192-408HLF 86130202123355E1LF LD25S33E4GV00LF 70430-164LF DAPO15S365TLF LD15P33E4GV00LF 54202-S08-07LF 68000-236HLF 86093967896755LF