Data Sheet


HUBER+SUHNER

Coaxial PCB Connector
81_SMP-S50-0-L1/111_N

Description

Right angle PCB plug

Interface Standards
MIL-STD-348 SMP

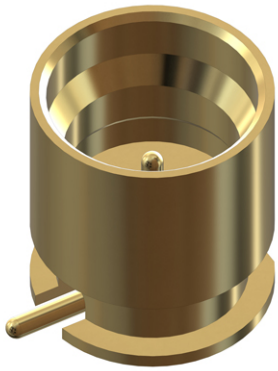

Technical Data

Electrical Data

Impedance	50 Ω
Interface frequency max.	40 GHz

Mechanical Data

Board mounting type	surface mount
Weight	0.00025 kg

Environmental Data

Operating temperature	-55 °C to 125 °C
2011/65/EU (RoHS - including 2015/863 and 2017/2102)	compliant

Material Data

Piece Parts	Material	Surface Plating
Centre contact	Copper Beryllium Alloy	Gold Plating (Nickel underplated)
Outer contact	Brass	Gold Plating (Nickel underplated)
Body	Brass	Gold Plating (Nickel underplated)

Related Documents

Outline drawing	DOU-00316675

Ordering Information

Single package	81_SMP-S50-0-L1/111_NE

Waiver: It is exclusively in written agreements that we provide our customers with warrants and representations as to the technical specifications and/or the fitness for any particular purpose. The facts and figures contained herein are carefully compiled to the best of our knowledge, but they are intended for general information purposes only.

Document: DOC-0000760081 E / PDO B / date of publication: 27.03.2020 20:28:03 / uncontrolled copy

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Huber+Suhner:

85201112 PCRS_LCMX_LCMX_O421T_30.0_LL 16_MMCX-50-2-4/111_OH 22511964 23002145
11_SMC-50-2-10/111_NE 6601_PC185-50-1/199_NE 6620_SMA-50-2/199_NE MINIBEND R-10
11_TNC-50-3-116/133_NE 24_SMA-50-2-15/111_NH G_03130_HT-01 84118385 G032D/BNCm/BNCm/1000
G032D/Nm/SMAm/1000 RADOX 125 0.75 MMÂ² RED RG_196_A/U 11MMBXEF31616MMBX/300
33_PC24-SK-50-2/199_NE 6806.19.A MINIBEND R-8 1399.17.0231 84093961 MINIBEND R-12 12012090
12535682 1399.17.0210 1399.31.0020 23000457 Minibend L-10