Your Expert Partner for **Human Machine Interfaces**

Actuator

Distribution by
DigiKey

46-
2134.3120.000



https://digikey.eao.com/p/46-2134.3120.000

Your product:



46-2134.3120.000
Actuator

FRONT

Front bezel material:	Metal
Front bezel colour:	Silver
Front dimension:	Ø 29,5 mm
Front form:	round

MOUNTING

Design:	raised
Mounting cut-out:	Ø 22.3 mm

OPERATING-/INDICATION PART

Lens material:	Plastic
Lens shape:	flush
Lens optics:	opaque
Lens colour:	Red
Lens illumination:	non illuminative

ELECTRICAL CHARACTERISTICS

Protection class:	II

MECHANICAL CHARATERISTIC

Tightening torque:	2 … 3 Nm (17.7 … 26.6 Lb-in)
Mechanical lifetime:	500 000 cycles of operation

Weight:	0.033 kg
Switching action:	Maintained

AMBIENT CONDITION


Vibration resistance:	5g f= 2...500Hz (EN-IEC 60068-2-6)
Operating temperature:	– 25 °C ... + 55 °C
IK front protection:	IK03
IP front protection:	IP65
Climate resistance:	+25°C-97%RH / +45°C-93%RH (IEC-EN60068-2-30)
Shock resistance:	50g, 11ms (EN-IEC 60068-2-27)

CERTIFICATE

Conformities:	CE
Standards:	CSA C22-2, IEC EN 60947-1, IEC EN 60947-5-1, UL508

OTHER

Short Description:	Actuator, Ø 22.3 mm, Ø 29,5 mm, flush, non illuminative, Red, Plastic, opaque, round, Silver, Metal, Maintained, IP65, IK03
max. number of switching elements:	6
Housing colour:	Black
Housing material:	Plastic
Dimension drawings:	

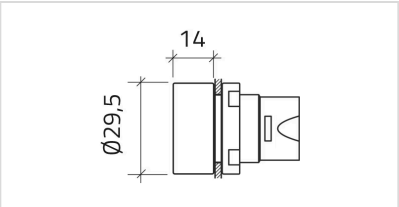

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

eao:

31-282.0252 44-966.5 61-1130.0 704.011.018 704.403.018 84-8511.5620 17-030352 45-2530.1920.000 45-290J.1000.111 704.403.0 704.602.0 82-4151.2133 82-6851.2000 01-132.0252 31-940 51-423.036 82-4151.1154 10-2K12.1072 45-2134.1120.000 704.042.418 02-810.001 704.411.110KN 82-6551.1134 10-1112.1279 45-1131.2190.000.101 45-320.1E16 82-6561.1000 45-320.1E46 82-5151.1134 K14-131.221071