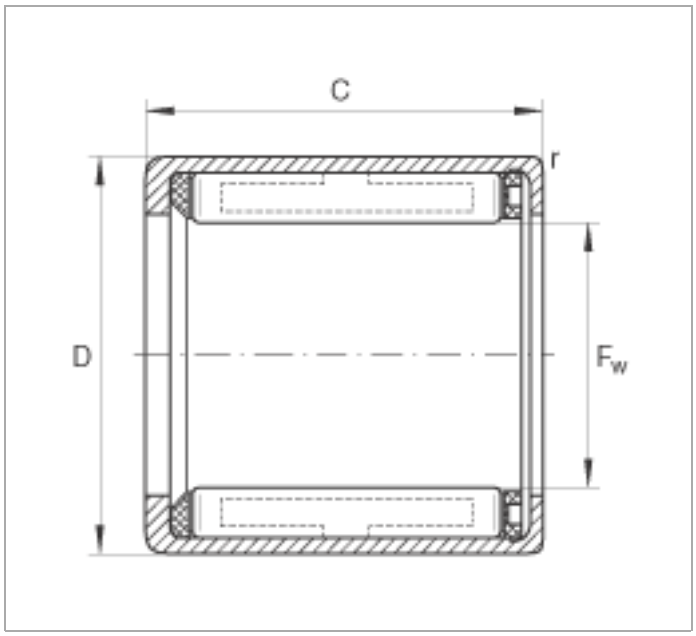
Drawn cup roller clutches HF0612 (Series HF)

with steel springs

The datasheet is only an overview of dimensions and basic load ratings of the selected product. Please always observe all the guidelines in these overview pages. Further information is given on many products under the menu item "Description". You can also order comprehensive information via the Catalogue ordering system (http://www.ina.de/content.ina.de/en/mediathek/library/library.jsp) or by telephone on +49 (91 32) 82 - 28 97.

F_w	6	mm	
D	10	mm	
C	12	mm	Tolerance: 0/-0,3
r_{min}	0,3	mm	
m	3	g	Mass
$M_{d\,zul}$	1,76	Nm	Permissible torque
n_{GW}	23000	1/min	Limiting speed with rotating shaft (valid for grease and oil lubrication)
n_{GA}	13000	1/min	Limiting speed with rotating outer ring (valid for grease and oil lubrication)
	HK0608		Suitable drawn cup needle roller bearings for radial bearing arrangement


C
r
D
F_w

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

INA:

TME50-XL-N KRE52-PP-A GE6-UK HK20202RSL271 KH06-PP PCJT40-XL-N RAE30-XL-NPP-FA106 RME60-XL-N#N1>1 PNA20/42-XL KR5207-2RS GE40-FO-2RS KB16-PP-AS NA2200-2RSR NKIA59/22-XL GE50-DO-2RS GE50-UK-2RS-A KB40-PP-AS NATV15-PP-A NUKR35-X-A GE35-DO-2RS GE40-UK-2RS-A KH10PP LR203-X-2RSR RCJY40-XL-N IR17X22X14-IS1-OF-XL IR7X10X12-XL KWVE25-B-V2-G3 NA4907-2RSR-XL NKIB5902-XL NKXR30-XL