
Rocker Switch | **RA5-1A-DC-2-RL**


SWITCH COMPONENTS

Mechanical Dimensions (mm)

Tolerances ±0.3 Unless Otherwise Specified

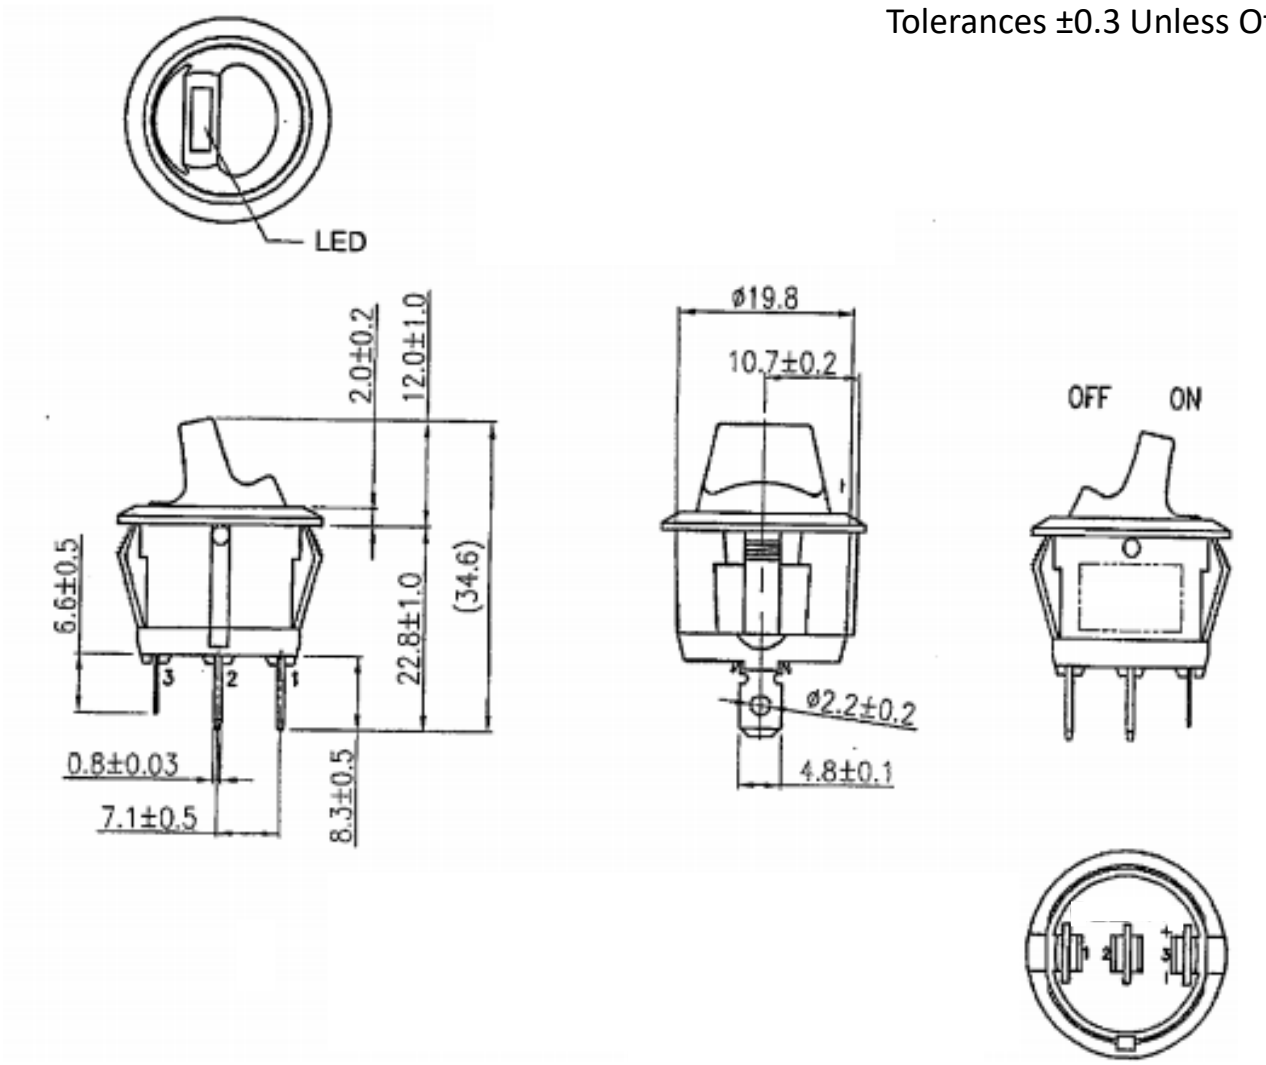

Mounting Hole

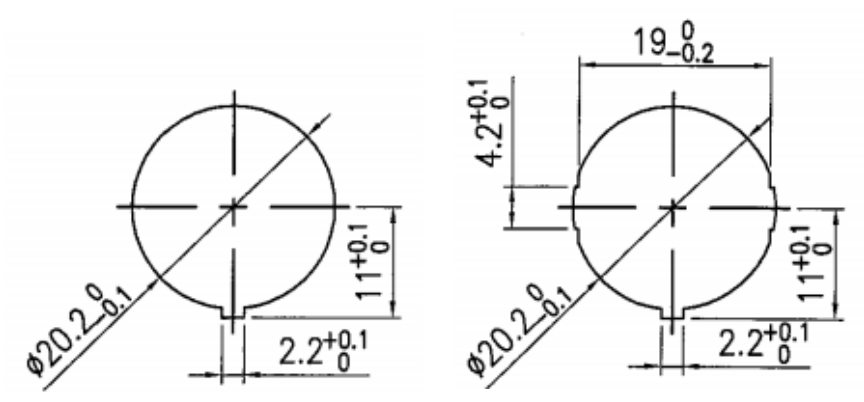


Thickness: 2.0~3.0

Thickness: 0.7~3.0

Circuit Diagram

4P SPST OFF-ON (LED-I)

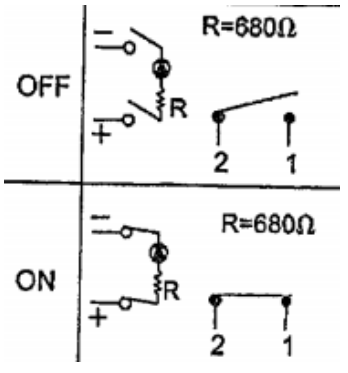

Electrical Specifications

Rating	20A 14V DC
Contact Resistance	50m ohm Max.
Insulation Resistance	DC 500V 100M ohm Min.
Dielectric Strength	AC 1500V 1 minute
Operation Temperature	-25°C~85°C

Material Specifications

Frame	Black, Nylon#66
Actuator	Black, Nylon#66
LED	Red (Independent)

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Switch Components:

PB-1A-DC-2-RDL SRC1-1B-DC-1-B RD2-1A-DC-1-AL SRA1-2F-DC-1-NN TA2-1A-DC-5 TA2-1G-DC-6-O TA1-1A-DC-4 TE3-1A-DC-1-AL PB-1B-DC-2-RIL RA4-2A-DC-2-AL RC-1A-DC-1-AL RF3-1A-DC-2-GL SB-1B-DC-3-B SB-1B-DC-3-R SRB1-1G-DC-1-NN TB1-2H-DC-6 RG3-1A-DC-1-B SRD2-2F-DC-1-BNN WR1 PB-1A-DC-2-B RF1-1A-DC-2-B-3 SRA1-1A-DC-1-NN-2 SRD1-2A-DC-1-BGN TC6-P1-Z PD-1E-DC-9-UL SRD2-1G-DC-1-BNN SRD2-2F-DC-1-RNN TE1-1F-DC-1-PB SC-B TE6-1A-DC-1-UL