


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
© COPYRIGHT 20 BY - ALL RIGHTS RESERVED.

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL	15MAY2015	DW	CW
	A1	ECR-16-002757	24FEB2016	RL	CW
	A2	ECR-21-000654	26JAN2021	BS	CW

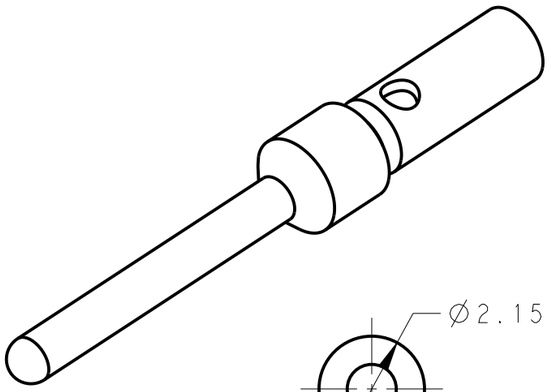

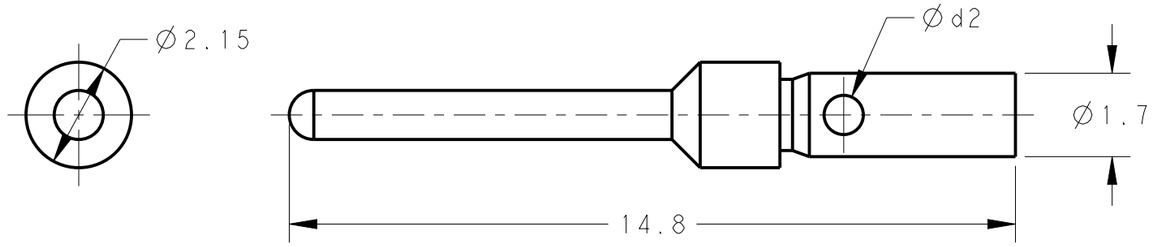

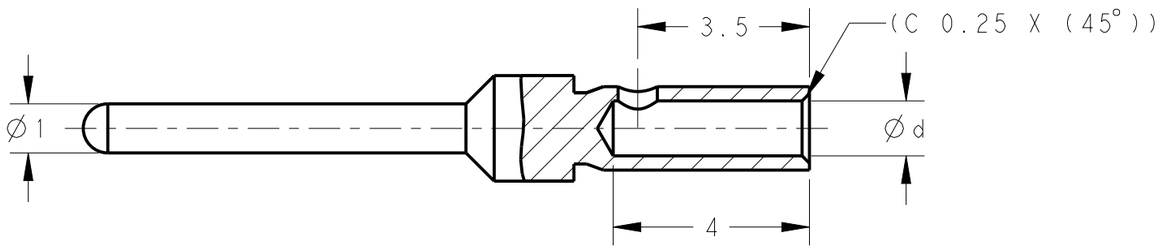

NOTES:
1. TECHNICAL CHARACTERISTICS:
   CONTACT MATERIAL: BRASS
   SURFACE PLATING:
   SILVER PLATING: >= 2µm
   GOLD PLATING: >= 0.75µm
   WIRE RANGE: 0.08-0.52 mm² (28-20 AWG)
   OPERATION TEMPERATURE: -40-+125°C

注释：
1. 技术参数：
   公针材料：黄铜
   表面电镀：
   镀银：>= 2µm
   镀金：>= 0.75µm
   接线范围：0.08-0.52 mm² (28-20 AWG)
   工作温度：-40-+125°C

-	PART NUMBER AFTER PLATING 电镀后料号				Ød	Ød2	WIRE GAUGE 线规		STRIPPING LENGTH 剥线长度 (mm)
	SILVER PLATING 镀银		GOLD PLATING 镀金				MM²	AWG	
PIN CONTACT 公针	CAM-08	T2070001008-000	DAM-08	T2070011008-000	0.7	0.6	0.08-0.21	28-24	4.0
	CAM-13	T2070001013-000	DAM-13	T2070011013-000	0.9	0.8	0.13-0.33	26-22	
	CAM-33	T2070001033-000	DAM-33	T2070011033-000	1.12	0.8	0.33-0.52	22-20	

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±-
1 PLC ±-
2 PLC ±-
3 PLC ±-
4 PLC ±-
ANGLES ±-

MATERIAL - / -

FINISH - / -

DWN David Wang 15MAY2015
CHK Chris Wang 15MAY2015
APVD Xiang Xu 15MAY2015

PRODUCT SPEC 108-137064

APPLICATION SPEC 114-137064

WEIGHT -

TE Connectivity

NAME CAM/DAM D-SUB PIN CONTACT

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-T20700X10XX000	-

Customer Drawing

SCALE 8:1 SHEET 1 OF 1 REV A2