

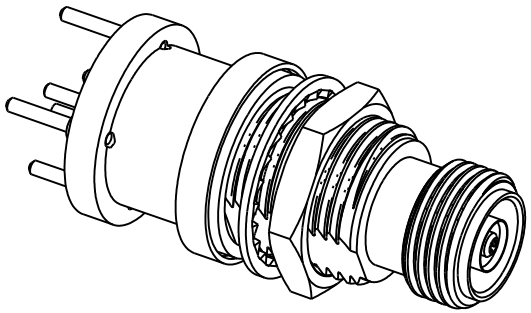


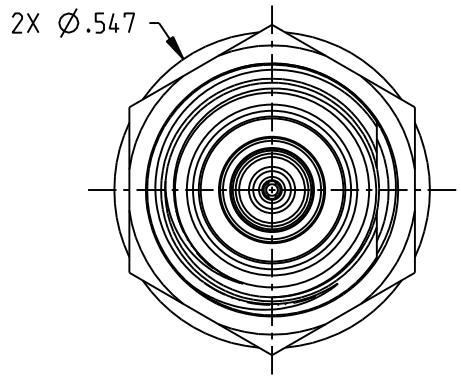

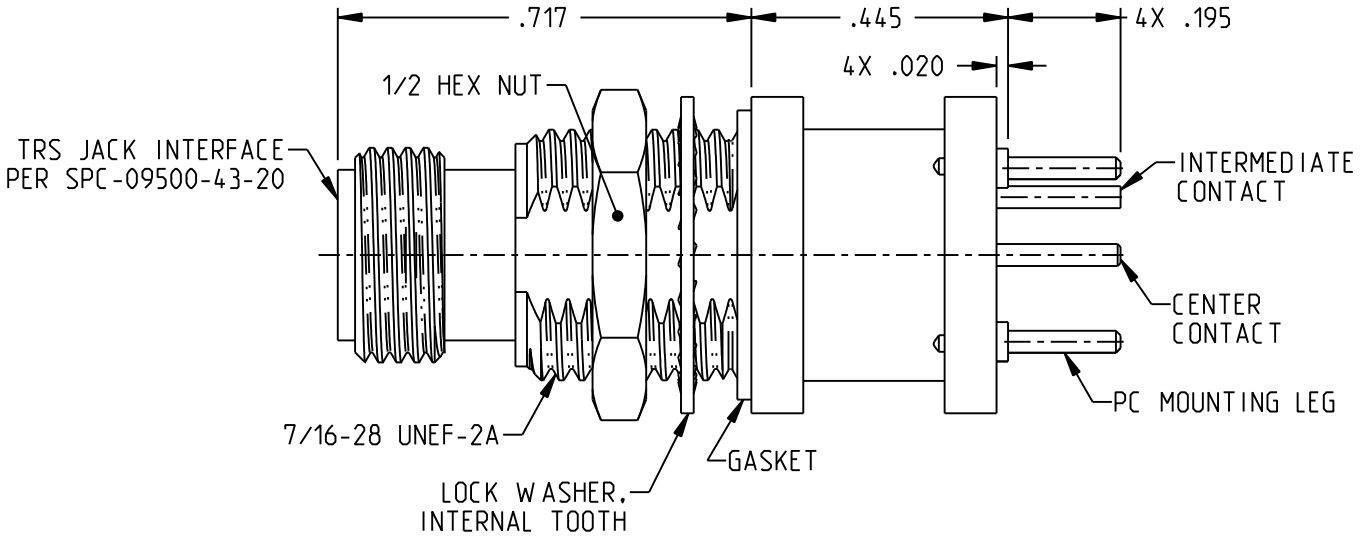


NOTES: UNLESS OTHERWISE SPECIFIED:

1. MATERIAL & FINISH:
   1.1 BODY: NICKEL PLATED BRASS
   1.2 PC MOUNTING LEG: TIN PLATED BRASS
   1.3 INSULATOR & DIELECTRIC: PTFE (TEFLON)
   1.4 INTERMEDIATE CONTACT: GOLD PLATED BRASS
   1.5 CENTER CONTACT: GOLD PLATED BERYLLIUM COPPER
   1.6 MOUNTING HARDWARE: NICKEL PLATED COPPER ALLOY


2. ELECTRICAL:
   2.1 FREQUENCY (MAX): 500 MHz
   2.2 IMPEDANCE: NON-CONSTANT

3. PANEL NUT TORQUE (MAX): 30 INCH POUNDS

4. PANEL THICKNESS (MAX): .250



RECOMMENDED
PANEL CUTOUT

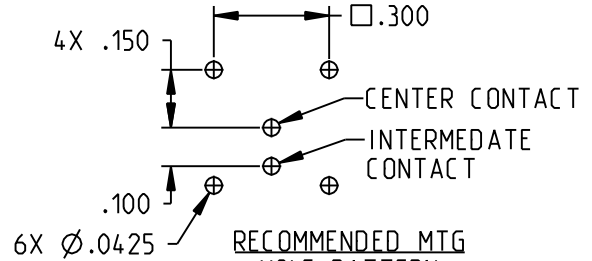

RECOMMENDED MTG
HOLE PATTERN

NOTICE: The information in this drawing is PROPRIETARY and must not be used without the permission of Cinch Connectivity Solutions. It may contain data whose export is restricted. Verify status prior to exporting.

INTERPRET DRAWING IN ACCORDANCE WITH ASME Y14.5-2018

3RD ANGLE PROJECTION

RoHS2 ☑ 2015/863/EU

UNLESS OTHERWISE SPECIFIED
UNITS: INCH
.XX ±.02
.XXX ±.010
ANGLES ±2°

TROMPETER

Title: TRS BULKHEAD CIRCUIT BOARD JACK

Model No. CBBJ3159

Size	DO NOT SCALE DRAWING	Date:	Sheet
A		9/6/2022	1 OF 1