


MATERIAL NO. -56 OPTION	ENGINEERING NUMBER	NUMBER OF CIRCUITS	DIM "A" .010/.13	DIM "B"
399200502	920502-56	02	1.150/29.21	.591/1591
399200503	920503-56	03	1.740/44.20	1.181/30.00
399200504	920504-56	04	2.330/59.18	1.772/45.01
399200505	920505-56	05	2.920/74.17	2.362/59.99
399200506	920506-56	06	3.510/89.15	2.953/75.01
399200507	920507-56	07	4.100/104.14	3.543/89.99
399200508	920508-56	08	4.690/119.13	4.134/105.00
399200509	920509-56	09	5.280/134.11	4.724/119.99
399200510	920510-56	10	5.870/149.10	5.315/135.00
399200511	920511-56	11	6.470/164.43	5.906/150.01
399200512	920512-56	12	7.060/179.32	6.496/165.00

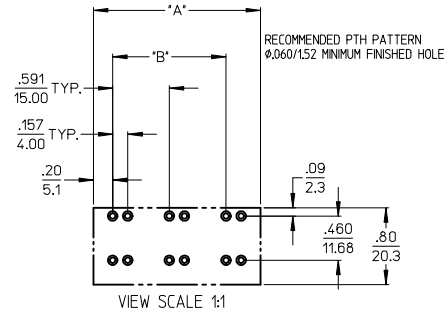



VIEW SCALE 1:1






ACTUAL SIZE



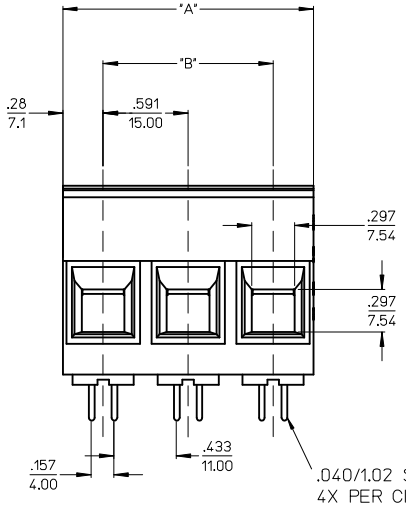

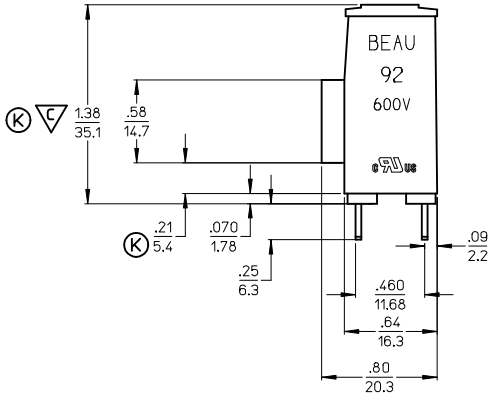

NOTES:
1. DESIGNED TO MEET NEC & UL 1059 CLASS C 600 VOLTS
2. "XX" REFERS TO THE NUMBER OF CIRCUIT POSITIONS.
3. ROHS COMPLIANT BY EXEMPTION. *

ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH
6	XX	SCREW, M5, #2 POZI-SLOT, ST. STEEL	S.S.	TIN
5	XX	TERMINAL	COPPER	TIN
4	XX	TERMINAL	COPPER	TIN
3	XX	CAGE *	BRASS	NICKEL
2	1	COVER	THERMOPLASTIC	BLACK
1	1	BODY	THERMOPLASTIC	BLACK

UPDATE DIM., ADD CTO. DIM. 2013/09/10
EC NO: IPG2013-1881 2013/09/17
DRWN: JENCINAS 2013/09/24
CHKD: JMACNEIL
APPR: JMACNEIL
DESCRIPTION
REV: K

QUALITY SYMBOLS
▼=0
▽C=1

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± ---	±.0002
3 PLACES	± 0.003	±.005
2 PLACES	± 0.13	±.01
1 PLACE	± 0.3	±.1
ANGULAR ±1/2°		

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: IN/MM
SCALE: 4:1
DESIGN UNITS: INCH
THIRD ANGLE PROJECTION

DRAWN BY	GHR	DATE 00/02/03
CHECKED BY	RKEMP	DATE 00/12/11
APPROVED BY	LROTHAUS	DATE 01/05/10

TITLE: SR, BTS, #3AWG 85A, 600V

molex MOLEX INCORPORATED

MATERIAL NO.: SEE CHART
DOCUMENT NO.: SD-39920-005
SHEET NO.: 1 OF 1
SIZE: C

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION