REVISION E

DESIGNED & DIMENSIONED IN MILLIMETERS[INCHES]

DO NOT SCALE FROM THIS PRINT

DIN7A-J-P-XX-RA-BH1

SERIES
-7A: 75 OHM DIN 1.0/2.3

GENDER
-J: JACK

TYPE
-P: PCB


ORIENTATION
-RA: RIGHT ANGLE

TERMINATION
-BH1: BULKHEAD THROUGH HOLE

PLATING SPECIFICATION
-HG: 30µ" GOLD CENTER CONTACT,
10µ" GOLD OUTER CONTACT
100µ" Ni ON BODY
-HF: 30µ" GOLD CENTER CONTACT,
3µ" GOLD OUTER CONTACT
100µ" Ni ON BODY
-GF: 10µ" GOLD CENTER CONTACT,
3µ" GOLD OUTER CONTACT
100µ" Ni ON BODY
(SEE TABLE 1)


TABLE 1

ITEM	COMPONENT	-HG	-HF	-GF
1	SUB ASSEMBLY	SUB-DIN7A-J-P-HG-RA-BH1	SUB-DIN7A-J-P-HF-RA-BH1	SUB-DIN7A-J-P-GF-RA-BH1
2	NUT	DINA-NUT-001-N		

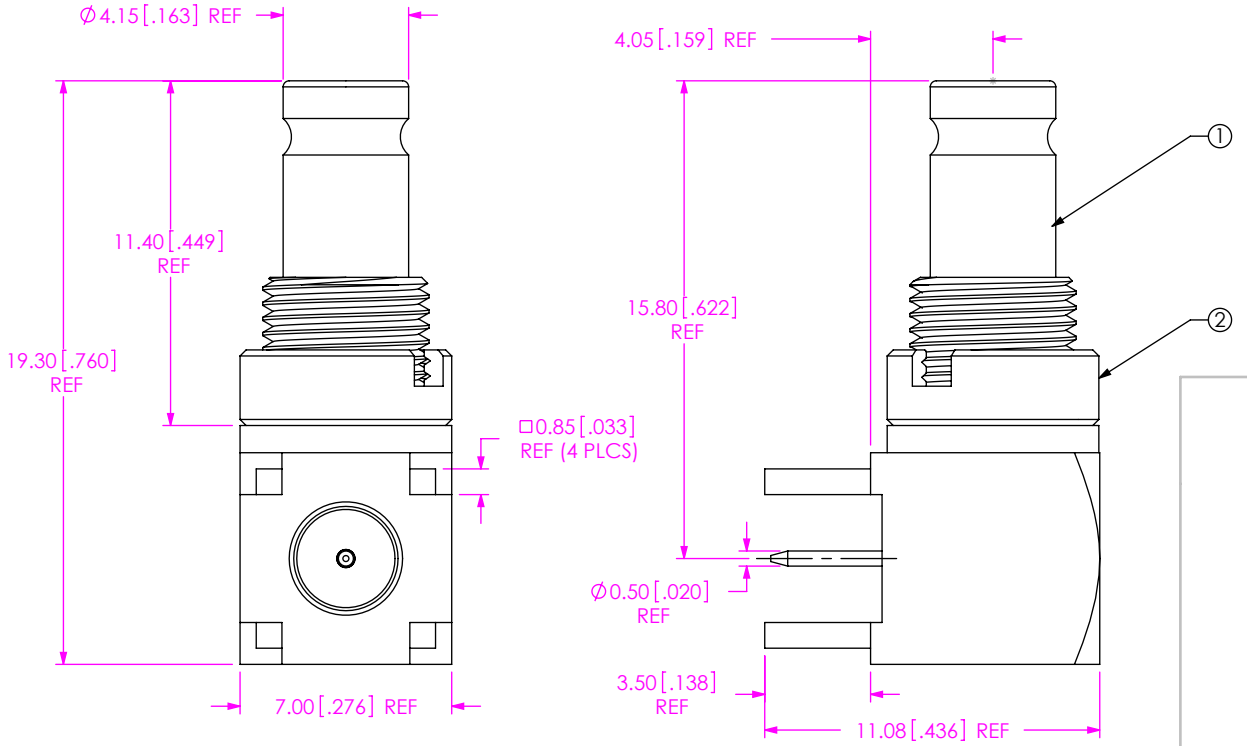


RECOMMENDED MOUNTING HOLE

2.40 [.095] MAX PANEL THICKNESS



RECOMMENDED PCB LAYOUT

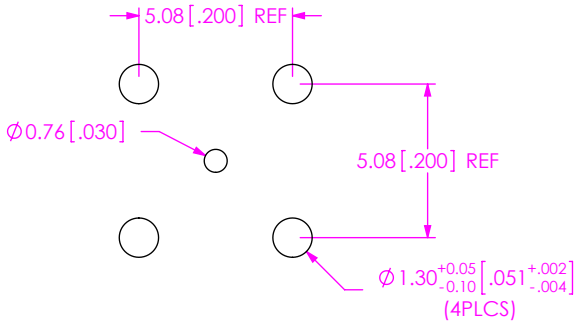

NOTES:

1. Ⓒ REPRESENTS A CRITICAL DIMENSION.
2. DELETED.
3. DELETED.
4. DELETED.
5. DELETED.
6. DELETED.
7. NUT TO BE PACKAGED SEPARATELY.

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN MILLIMETERS
TOLERANCES ARE:
DECIMALS
.X: ±0.3 [.01]
.XX: ±0.13 [.005]
.XXX: ±0.051 [.0020]
ANGLES
5 °

PROPRIETARY NOTE
THIS DOCUMENT CONTAINS INFORMATION CONFIDENTIAL AND PROPRIETARY TO SAMTEC, INC. AND SHALL NOT BE REPRODUCED OR TRANSFERRED TO OTHER DOCUMENTS OR DISCLOSED TO OTHERS OR USED FOR ANY PURPOSE OTHER THAN THAT WHICH IT WAS OBTAINED WITHOUT THE EXPRESSED WRITTEN CONSENT OF SAMTEC, INC.

samtec
520 PARK EAST BLVD, NEW ALBANY, IN 47150
PHONE: 812-944-6733 FAX: 812-948-5047
e-Mail: info@SAMTEC.com code: 55322

MATERIAL: DO NOT SCALE DRAWING SHEET SCALE: 4:1

SHELL,BODY,NUT,WASHER: BRASS
CENTER CONTACT: COPPER ALLOY
DIELECTRIC: PTFE

DESCRIPTION:
TRUE 75 OHM RIGHT ANGLE JACK ASSEMBLY

DWG. NO.
DIN7A-J-P-XX-RA-BH1

BY: talonz 03/19/2010 SHEET 1 OF 1

F:\DWG\MISC\MKTG\DIN7A-J-P-XX-RA-BH1-MKT.SLDDRW