
© 2022 TE Connectivity. All Rights Reserved.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A1	REVISED AS PER ECN-22-162188	01JUL2022	RB	L.R.

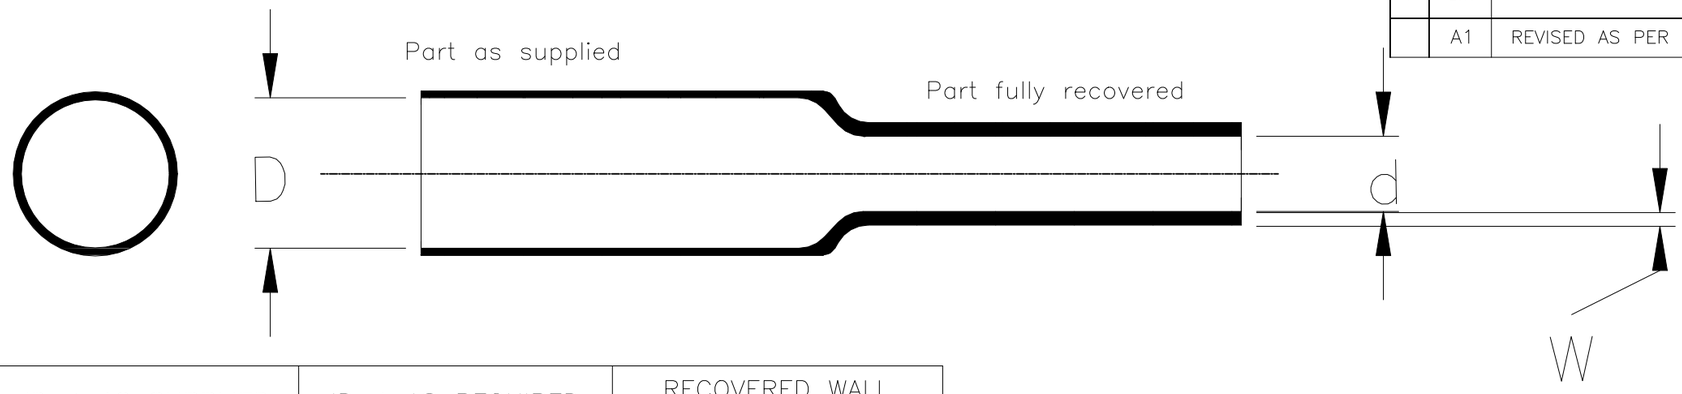

SIZE	ID ø AS SUPPLIED	ID ø AS REQUIRED	RECOVERED WALL THICKNESS
	D MINIMUM	d MAXIMUM	AFTER HEATING(NOM)
1/16	1.58(0.63)	0.79(.031)	0.30(.012)
1/8	3.18(.125)	1.57(.062)	0.30(.012)
3/16	4.75(.187)	2.36(.093)	0.36(.014)
1/4	6.35(.250)	3.18(.125)	0.41(.016)
3/8	9.53(.375)	4.75(.187)	0.48(.019)
1/2	12.70(.500)	6.35(.250)	0.48(.019)
5/8	15.88(.625)	7.95(.312)	0.56(.022)
3/4	19.05(.750)	9.53(.375)	0.69(.027)
1	25.40(1.000)	12.70(.500)	0.79(.031)
1 1/4	31.75(1.250)	15.88(.625)	0.84(.033)
1 1/2	38.10(1.500)	19.05(.750)	0.94(.037)
2	50.80(2.000)	25.40(1.000)	1.02(.040)

NOTES:-

1. THIS PRODUCT IS DESIGNED FOR A WIDE RANGE OF APPLICATIONS, AND MEETS THE PERFORMANCE REQUIREMENTS OF TE SPECIFICATION RT-555.
2. PACKAGED AND SUPPLIED ON A SPOOL AND LABELED WITH (example: RT-555-3/8-0), PART NUMBERING SYSTEM: RT-555= PART NUMBER, 3/8= ORDER SIZE,-0= BLACK (STANDARD COLOR).
3. ALWAYS ORDER THE LARGEST SIZE THAT WILL SHRINK SNUGLY OVER THE COMPONENT TO BE COVERED.
4. FOR MATERIAL AND FINISH INFORMATION REFER TO RT-555 SPECIFICATION. FOR SPECIAL ORDER SIZES, CONTACT TE CONNECTIVITY.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± -
1 PLC ± -
2 PLC ± -
3 PLC ± -
4 PLC ± -
ANGLES ± -

MATERIAL -

FINISH -

DWN	G.ROSITANO	15MAY2018
CHK	L.RODRIGUEZ	15MAY2018
APVD	L.RODRIGUEZ	16MAY2018
PRODUCT SPEC	—	
APPLICATION SPEC	—	
WEIGHT	0	

TE Connectivity

NAME
RT-555
HEAT SHRINK TUBING FLEXIBLE
ABRASION RESISTANT FLAME RETARDANT

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	06090	C-RT-555	—

CUSTOMER DRAWING

SCALE	SHEET	REV
DNS	1 OF 1	A1